

**SPECIFICATIONS**

**Mechanical**

Contact Retention Force: 1.0Kg min.

**Electrical**

Voltage Rating: 750V

Current Rating: 1A

Contact Resistance: 45mΩ max.

Dielectrical Withstanding Voltage: 1000V

Insulation Resistance: 1000MΩ min.

**Physical**


Housing: LCP, UL 94-0, Ivory White

Contact: Phosphor Bronze


Plating: See "ORDERING INFORMATION"

**FUTURE BUS CONNECTOR**

1F Series,  
Plug. Press Fit Type  
2.0mm Pitch  
4 Rows

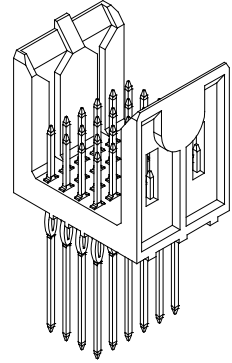

**DRAWING**

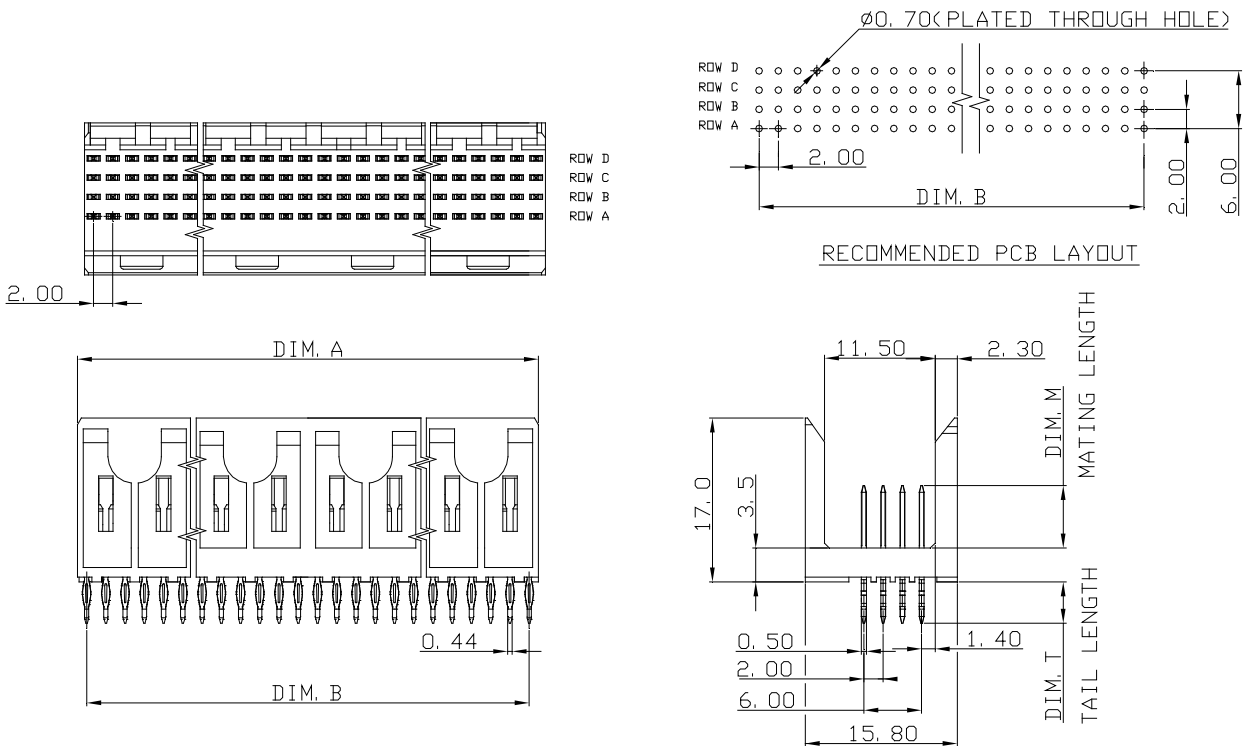

**ORDERING INFORMATION**

PRODUCT NO.: 1 F 1 1 \* \* \* \* - P \* \* B 0 \* - \* \*

POS. NO.:

024=024 pos.

048=048 pos.

096=096 pos.

192=192 pos.

Mating Area Plating:

1=GOLD FLASH

3=0.76um(30u")MIN. GOLD PLATING

5=1.27um(50u")MIN. GOLD PLATING

6=0.25um(10u")MIN. GOLD PLATING

A=0.76um(30u")MIN. FPT PLATING,  
0.25um(10u")MIN. GOLD INCLUDED

Tail Style:

P=Press Fit

Lead Free Code:

N=None

F=Lead Free

Package Type:

A=Tube

Extension Code:

N,T,L,M

BODY STYLE

B0=Long pin, wide body

Mating Length(DIM.M)

2=5.75mm

3=6.50 mm

Tail Length(DIM.T)

2=11.3mm

3=13.6mm

1F11024*-P**B0*..	24	11.90	10.00
1F11048*-P**B0*..	48	23.90	22.00
1F11096*-P**B0*..	96	47.90	46.00
1F11192*-P**B0*..	192	95.90	94.00
P/N	POS.	DIM. A	DIM. B