

SPECIFICATIONS

RCA With SPDIF. Connector

RCA Part

1. Mating force: 4N~39.2N.
2. Unmating force: 4N~39.2N.
3. Durability: 500 cycles.
4. Rated current:0.3A.


POF Part:

1. Mating force: **4N~39.2N.**
2. Unmating force: **4N~39.2N.**
3. Supply voltage: -0.5~7 V.
4. DC input voltage: -0.5~Vcc+0.5 V.
5. Transmission speed(NRZ signal): 16.0 Mbps Max..


Physical

- Housing:** Thermoplastic, UL 94V-0 rated in black color.
Door: Thermoplastic, UL 94V-0 rated in gray color.
Contact: Copper alloy and Steel alloy.
Plating: See "ORDERING INFORMATION".
Solder Pad: Copper alloy and Steel alloy.
Operating Temperature: -20°C to +70°C.

RCA With SPDIF. Series



DRAWING

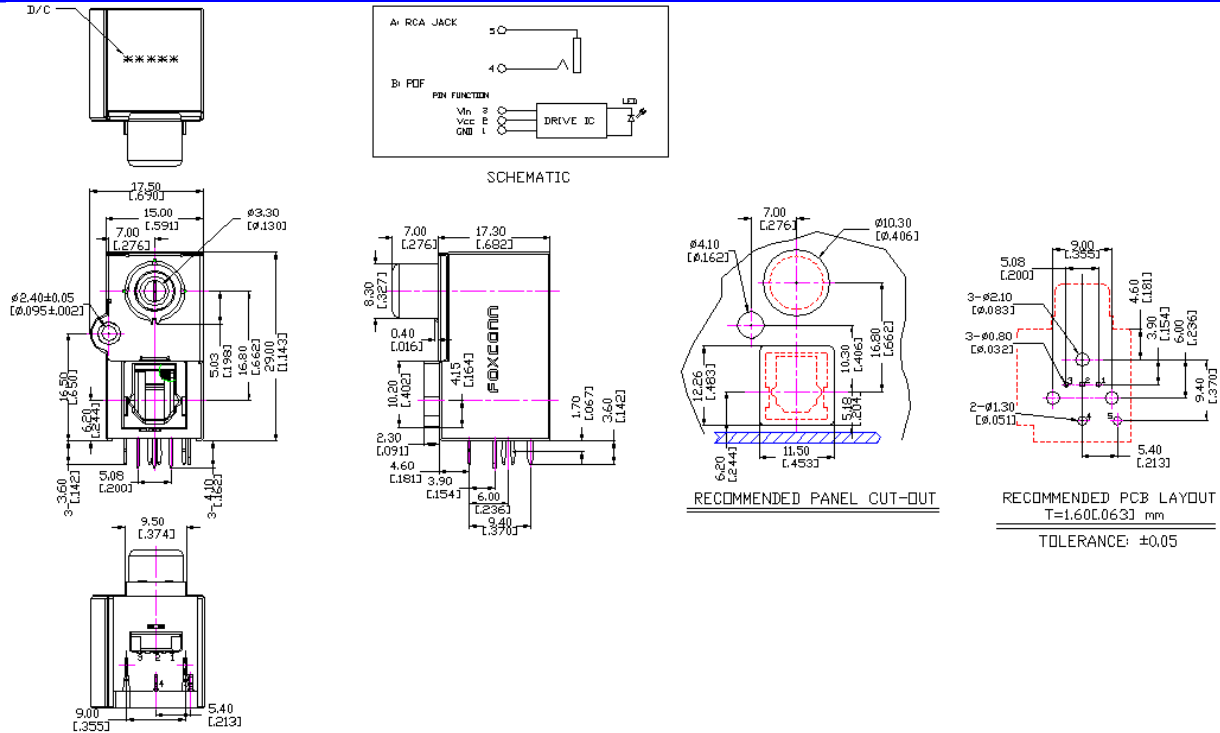

ORDERING INFORMATION

