


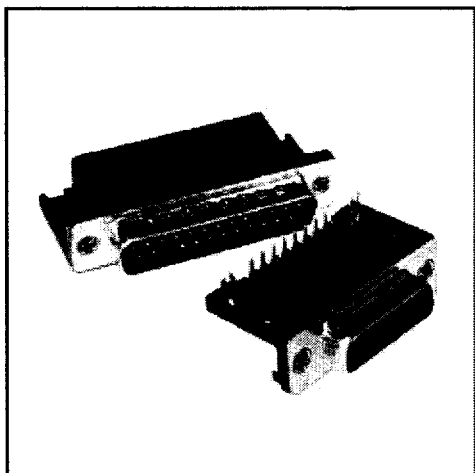

4021-[*]BT
Male / Right angle
4022-[*]BT
Female / Right angle

*Number of contacts;
Options are: **9, 15, 25, 37**
Standard with locking forks &
4-40 flush inserts.

FEATURES:


- Available in a variety of mounting and grounding styles
- Board locks available at no extra charge
- Bright tin shell for excellent EMC grounding
- Four shell sizes available
- Indentations for optimum mating retention & grounding
- Industry compatible 9, 15, 25 & 37 positions

ELECTRICAL:

- Current rating: 5 AMP maximum
- Contact resistance: 15 milliohms maximum
- Insulation resistance: 1000 Megohms minimum
- Dielectric withstanding voltage: 1000 VAC


MATERIAL:

- Insulator: UL94V-0 / PBT glass filled
- Contacts: Pin = Brass
Socket = Phosphor Bronze
- Plating: 6μ inch gold plated over nickel
- Operating temperature: -55°C to +105°C
- Shell: Steel, tin plated

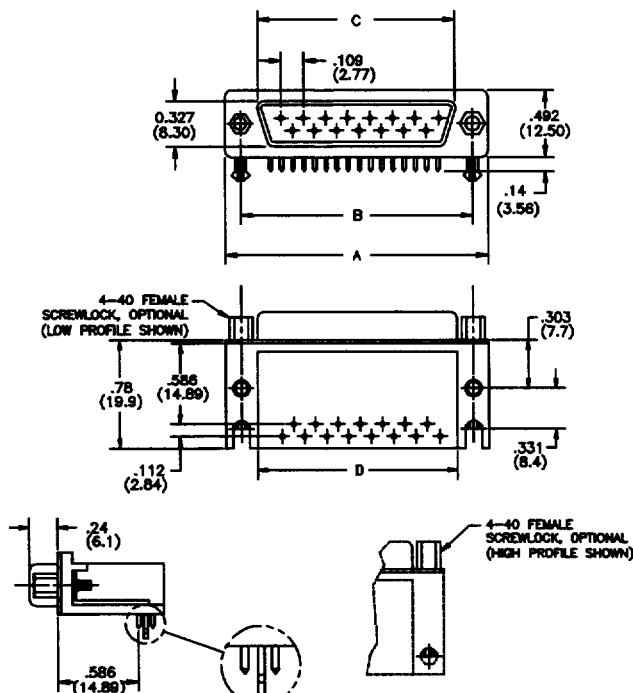

4021 Male

A ±	B ±	C ±	D ±	Position
0.004 (0.10)	0.005 (0.13)	0.010 (0.25)	0.010 (0.25)	
1.213 (30.80)	0.984 (25.00)	0.665 (16.90)	0.624 (15.85)	9
1.539 (39.10)	1.299 (33.00)	0.996 (25.30)	0.953 (24.20)	15
2.087 (53.00)	1.850 (47.00)	1.535 (39.00)	1.492 (37.90)	25
2.729 (69.32)	2.500 (63.50)	2.180 (55.37)	2.224 (56.50)	37

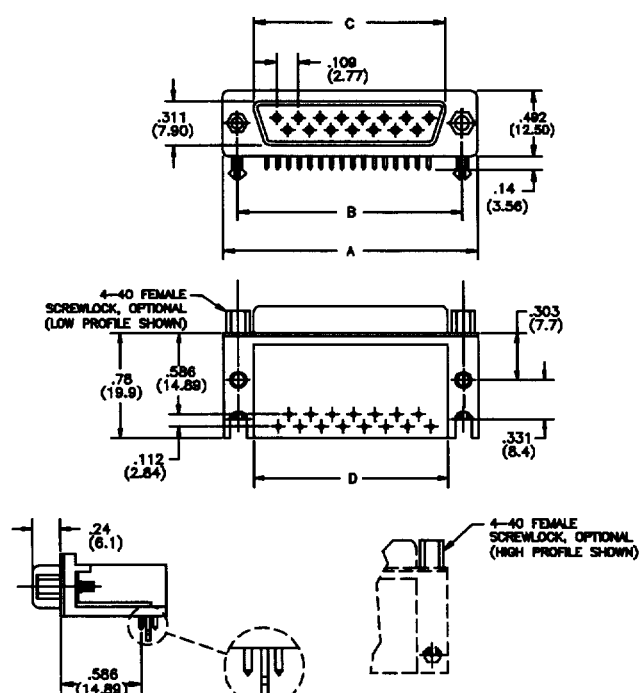

4022 Female

A ±	B ±	C ±	D ±	Position
0.004 (0.10)	0.005 (0.13)	0.010 (0.25)	0.010 (0.25)	
1.213 (30.80)	0.984 (25.00)	0.642 (16.30)	0.624 (15.85)	9
1.539 (39.10)	1.299 (33.00)	0.969 (24.60)	0.953 (24.20)	15
2.087 (53.00)	1.850 (47.00)	1.508 (38.30)	1.492 (37.90)	25
2.729 (69.32)	2.500 (63.50)	2.140 (54.36)	2.224 (56.50)	37