


order number: J08080A0047

SC Connector Multimode, ceramic

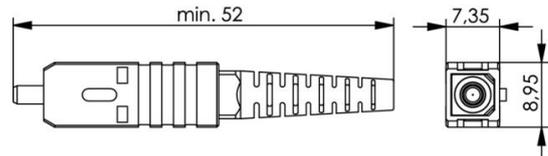

Technical Attributes	
Description	SC Connector Multimode, ceramic
Fiber type	G50/125 OM3
Remarks	for cable Ø 1,8 - 2,2 mm
Housing Colour	aqua

Product description

Telegärtner FO connectors are equipped with ceramic ferrules and split sleeves which are essential for precision and endurance; termination to cables or fibers may be carried out using common tools and accessories. The preformed convex front end of the connector ferrule provides extremely short polishing duration and exceptional optical performance. All FO connectors comply with the current international standards.

The T-ST3 type provides an internal strain relief, which avoids signal interruption when pulling the cable (N.O.D.). For Plastic Fibers (POF) with 1 mm fiber diameter an economical metal connector is available providing extremely quick assembly using simple accessories without adhesive.

The current requirements to achieve in FO applications the same port density as with RJ45 connectors have led to newly developed FO connector systems named SFF (= Small Form Factor). Telegärtner offers the connector types MT-RJ and LC within this system. The space requirements in panels or outlets are only half of those required by common connector types such as ST or SC.

Telegärtner offers a complete range of components within this system: FO connectors, jacks for outlets prepared for direct field termination of fibers, adaptors, patch cables, adaptor cables, outlets with guaranteed bending radii and suitable for standard switching programs, patch panels with and without telescope operation as well as wall boxes in different sizes.

The SC/APC connector type (Angled Physical Contact) with 8° angled polished ferrule end face has been developed for transmission lines with particular high return loss requirements for better than 60 dB. The connectors are available as pigtailed or cable assemblies, the connector and adapter housings are green for easy identification.

Mechanical Characteristics	
Type	

Durability (mating cycles)	≥1000
Hex crimp size for strain relief	4.52 x 10 mm
Strain relief	≥100 N
Material: connector ferrule	
Material: adaptor split sleeve	Zirkonia ceramic or phosphor bronze
Material: connector body	copper alloy, nickel-plated
Material: plug housing, boot, dust caps	thermoplastic, flame retardant, non halogen
Material: adaptor housing	thermoplastic, flame retardant, non halogen, or zinc diecast, nickel-plated
Material: retaining clip (adaptor)	stainless steel
Colour: Connector housing / adaptor housing	

Climatic Characteristics	
Operating temperature	-20°...80° C
Storage temperature	-40°...90° C

Optical Characteristics	
Insertion loss: Plug (factory assembly)	Multimode: max. 0.4 dB ¹ ; Singlemode/Singlemode APC: max. 0.5 dB ¹ ; POF: 1.5 dB; PCF: 1.0 dB
Insertion loss: Adaptor	Multimode/Singlemode: max. 0.2 dB ¹ ; Singlemode APC: 0.5 dB ¹
Return loss: plug (factory assembly)	Multimode: min. 30 dB ² ; Singlemode: min. 40 dB ² ; Singlemode APC: min. 60 dB ²