
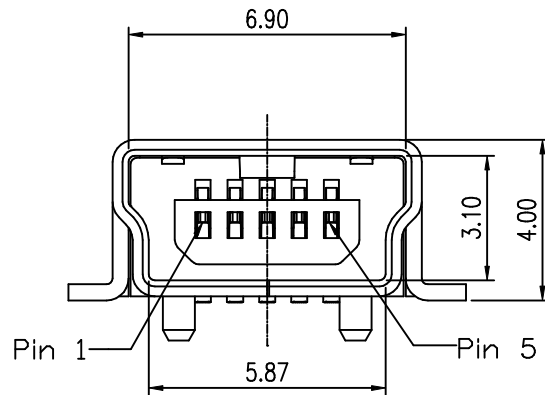


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.




FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.



PROD NO
SEE SHEET 2/2

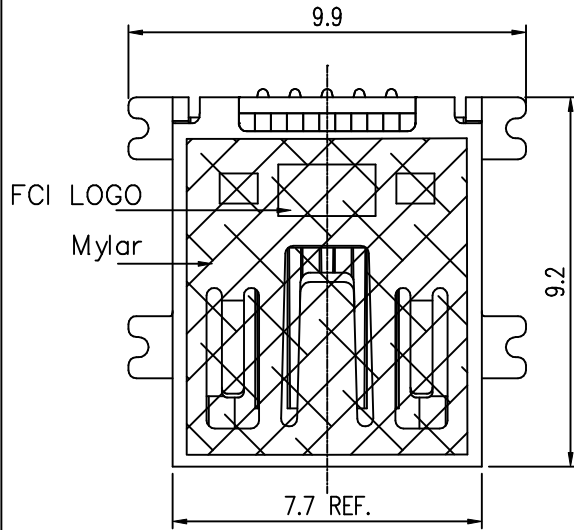

SEE DETAIL A

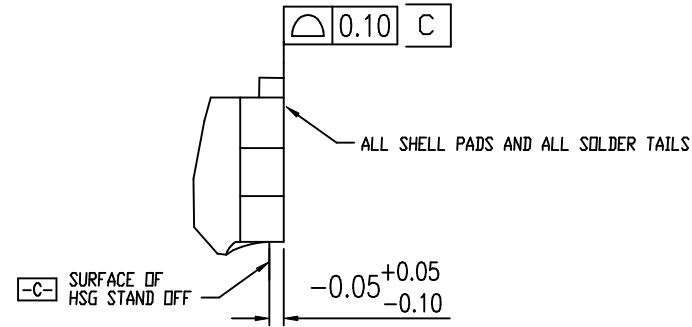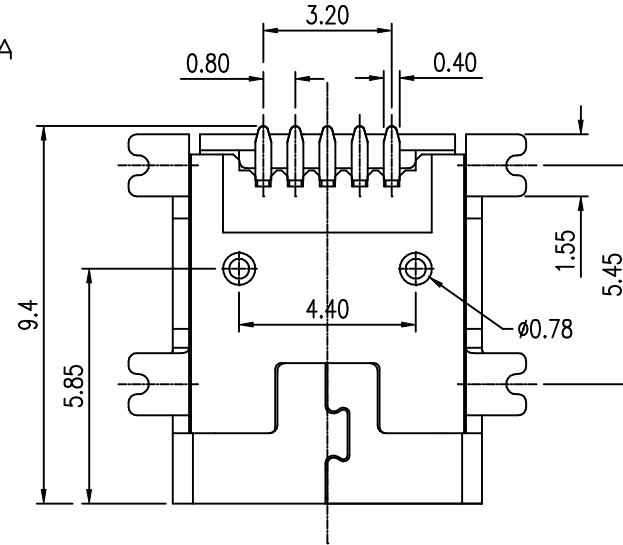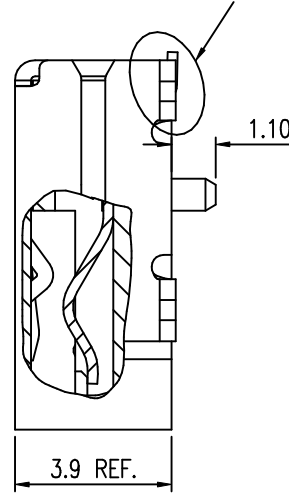

DETAIL A

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecr no	dr	date						
A	T03-0364	J.C.	9/9/03	linear	.X ±.30	projection	title MINI USB B TYPE RECEPTACLE CONNECTOR, R/A SMT TYPE		
B	T03-0386	J.C.	9/9/03		.XX ±.20				
C	T04-0020	J.C.	3/10/04	angles	.XXX ±.10		product family USB		
D	T04-0428	W.L	12/15/04	dr	0° ±3°				
E	T05-0037	W.L	2/21/05	enfr	JASMINE CHANG 9/9/03'	MM	size dwg no		
F	T05-0176	W.L	8/5/05	chr	ALLEN CHANG 9/9/03'				
				appd	ROGER LIN 9/9/03'	scale	A4 10033526		
					JAMES HSU 9/9/03'				
sheet index	revision sheet	F	F						
		1	2						

cage code
22526

ACAD

PDM: Rev:F

STATUS Released

Printed: Oct 19, 2005

PROD NO
SEE NOTES

NOTES:

1.MATERIAL:

HOUSING: THERMOPLASTIC. UL 94V-0 RATED.

CONTACT: COPPER ALLOY.

SHELL: COPPER ALLOY

Mylar: KAPTON TAPE.

2.FINISH:

CONTACT: UNDERPLATED 50u"MIN. NICKEL OVERALL 120u" MIN.
BRIGHT TIN/LEAD OR MATTE TIN ON SOLDERING AREA,
SELECTIVE GOLD PLATED ON CONTACT AREA.

SHIELD:

CODE L: PLATED BRIGHT TIN/LEAD WITH 120u"THICK.
OVER 100u" THICKNESS Cu.

CODE N: PLATED NICKEL WITH 120u"THICK,
OVER 100u"THICKNESS Cu.

3.ELECTRICAL SPECIFICATION:

CONTACT RESISTANCE: 50 milliohms MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 100 VAC FOR 1 min.

INSULATION RESISTANCE: 100 megaohms MIN.

4. PRODUCT ORDERING DATA :

10033526 - X X X X M

M: WITH MYLAR
BLANK: WITHOUT MYLAR

PACKAGING METHOD:

5: TRAY PACKAGING

2: TAPE & REEL PACKAGING

HSG COLOR:

1: BLACK.

HSG MATERIAL:

1: HTN.(PA6T)

PLATING IN CONTACT AREA:

1: Gold Flash.

3: 30u" Au.

5: 15u" Au.

OPTION FOR SHELL PLATING:

L: TIN/LEAD.

N: NICKEL.

10033526 - N X X X M LF

LF: Lead Free
BLANK: Non Lead Free

M: WITH MYLAR
BLANK: WITHOUT MYLAR

PACKAGING METHOD:

5: TRAY PACKAGING

2: TAPE & REEL PACKAGING

HSG COLOR:

1: BLACK.

HSG MATERIAL:



2: HTN.(PA46)

PLATING IN CONTACT AREA:

1: Gold Flash.

3: 30u" Au.

5: 15u" Au.

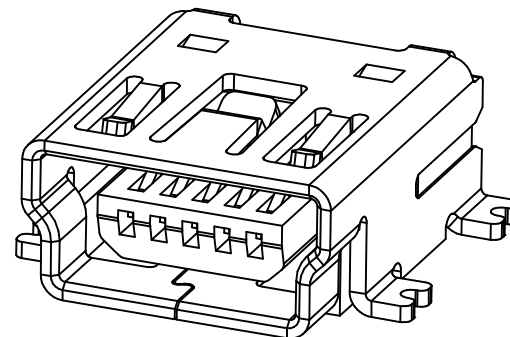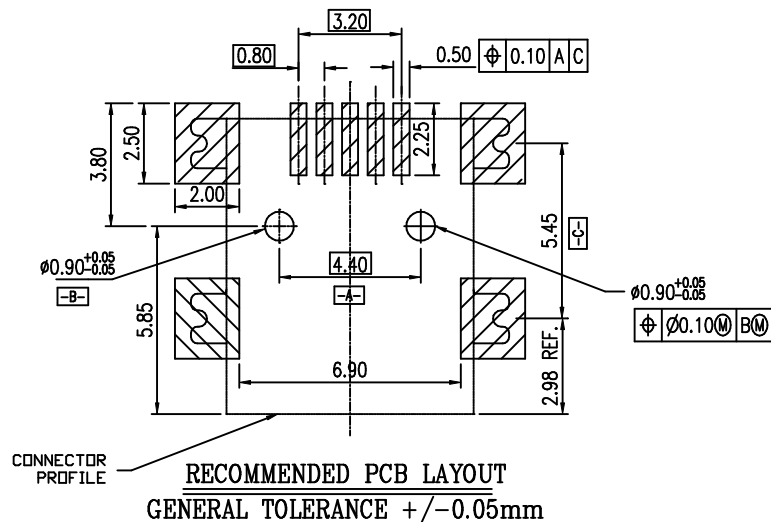

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		title	
ltr	ecn no	dr	date	linear	.X ±.30	projection		MINI USB B TYPE RECEPTACLE	
F					.XX ±.20			CONNECTOR, R/A SMT TYPE	
				angles	.XXX ±.10				
					0° ±3°				
				dr	JASMINE CHANG 9/9/03'	MM		product family	USB
				enr	ALLEN CHANG 9/9/03'			size	dwg no
				chr	ROGER LIN 9/9/03'				
				appd	JAMES HSU 9/9/03'	scale			
						N/A		A4	10033526
sheet index	revision sheet								sheet 2 of 2

cage code
22526

ACAD

PDM: Rev:F

STATUS: Released

Printed: Oct 19, 2005