


0.5mm Density ZIF FPC Connectors CE-235 Series

FEATURES

1. This is a surface mount (SMD)type connector for flexible printed circuit board (FPC).
2. ZIF (Zero Insertion force) type.
3. Both contacts and terminals have staggered type spacing.
4. Emboss tape packaged (2,500 pcs. in one reel).

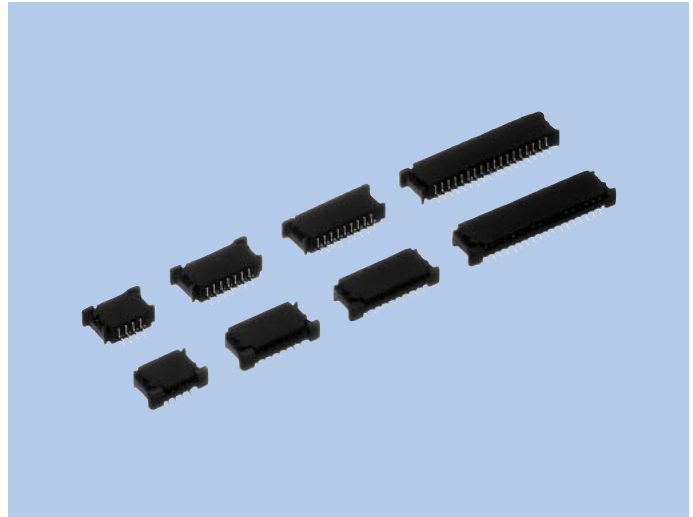

HOW TO ORDER

235- \square \square -90-1 $\frac{3}{3}$ $\frac{4}{4}$


- 1 Series No.
- 2 No. of contacts
- 3 Contact tail style
3 : Surface mount type.
- 4 Contact finish
4 : Solder plating.

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Rated Voltage	AC 50V (rms)
Rated Current	0.5A
Withstanding Voltage	200V AC (rms) 1minute
Insulation Resistance	50M Ω min. (at 500V DC)
Contact Resistance	30m Ω max.

DIMENSIONS

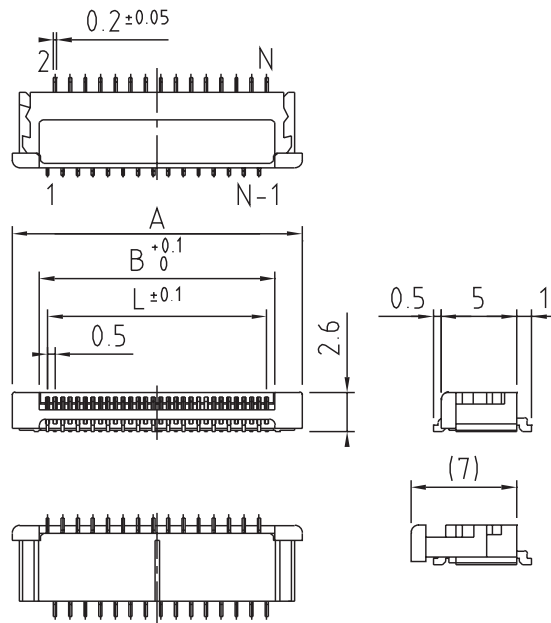

Unit : mm
Tolerance : ± 0.2 mm

No. of Contacts	Part No.	Measurement		
		L	A	B
8	235-08-90-134	3.5	8.2	4.6
12	235-12-90-134	5.5	10.2	6.6
14	235-14-90-134	6.5	11.2	7.6
18	235-18-90-134	8.5	13.2	9.6
20	235-20-90-134	9.5	14.2	10.6
22	235-22-90-134	10.5	15.2	11.6
26	235-26-90-134	12.5	17.2	13.6
30	235-30-90-134	14.5	19.2	15.6
36	235-36-90-134	17.5	22.2	18.6