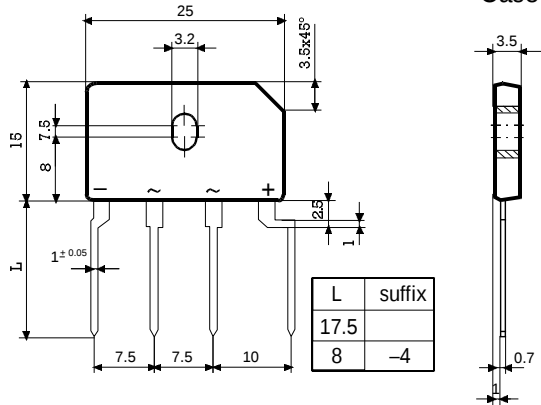


3.7 Amp. Glass Passivated Bridge Rectifier

Dimensions in mm.  Plastic Case • Mounting Instructions • High temperature soldering guaranteed: 260 °C – 10 sc. • Recommended mounting torque: 8 Kg.cm.	Voltage 100 to 1000 V. Current 3.7 A.  • Glass Passivated Junction Chips. • UL recognized under component index file number E320541. • Lead and polarity identifications. • Case: Molded Plastic. • Ideal for printed circuit board (P.C.B.). • High surge current capability. • The plastic material carries U/L recognition 94 V-O.
--	--

Maximum Ratings, according to IEC publication No. 134

		FBI3.7B 1M1	FBI3.7D 1M1	FBI3.7F 1M1	FBI3.7J 1M1	FBI3.7L 1M1	FBI3.7M 1M1
V_{RRM}	Peak Recurrent Reverse Voltage (V)	100	200	300	600	900	1000
V_{RMS}	Maximum RMS Voltage (V)	70	140	210	420	630	700
V_R	Recommended Input Voltage (V)	40	80	125	250	380	500
$I_{F(AV)}$	Max. Average forward current with heatsink without heatsink	3.7 A at 100 °C 3.0 A at 25 °C					
I_{FRM}	Recurrent peak forward current	20 A					
I_{FSM}	10 ms. peak forward surge current	150 A					
I^2t	I^2t value for fusing (t = 10 ms)	110 A ² sec					
V_{DIS}	Dielectric strength (terminals to case, AC 1 min.)	1500 V					
T_j	Operating temperature range	– 40 to + 150 °C					
T_{stg}	Storage temperature range	– 40 to +150 °C					

Electrical Characteristics at Tamb = 25°C

V_F	Max. forward voltage drop per element at $I_F = 3$ A	1.1 V
I_R	Max. reverse current per element at V_{RRM}	5 μ A
$R_{th(j-c)}$ $R_{th(j-a)}$	MAXIMUM THERMAL RESISTANCE Junction-Case. With Heatsink. Junction-Ambient. Without Heatsink.	5 °C/W 22 °C/W

Characteristic Curves

