


AC INLET/OUTLET・AC ADAPTER TERMINAL CONNECTOR BOARD・OPTICAL LINK



HCT 1402-□□□□




S-I 6498#51




CCT 1302-□□□□



CCT 1304-□□□□




CCT 1306-□□□□

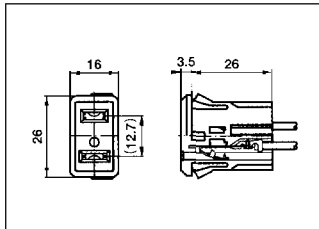


AC OUTLET (CRIMP TYPE)
ACアウトレット (圧着タイプ)

- Rating: 7A 125V AC
- Contact Resistance: 20mΩ max.
- Insulation Resistance: 100MΩ min. at 500V DC
- Withstanding Voltage: 2000V AC for one minute
- Applicable Wire: AWG 18
- Approved Standard: ▽

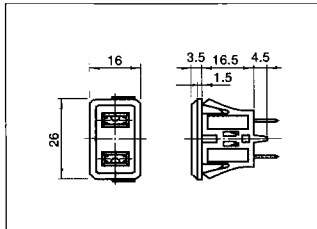

AC OUTLET (FASTON TYPE)
ACアウトレット (ファストン端子対応タイプ)

- Rating: 15A 125V AC
- Contact Resistance: 50mΩ max.
- Insulation Resistance: 100MΩ min. at 500V DC
- Withstanding Voltage: 2000V AC for one minute
- Operating Temperature: -10°C ~ +60°C
- Approved Standard: UL ▽

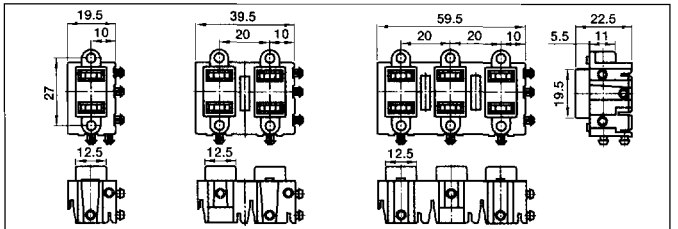

AC OUTLET
ACアウトレット

- Rating: 15A 125V AC
- Contact Resistance: 50mΩ max.
- Insulation Resistance: 300MΩ min. at 500V DC
- Operating Temperature: -20°C ~ +80°C
- Approved Standard: UL, CSA (W/Polarized)

	Applicable Style	2 Poles	4 Poles	6 Poles
W/o Polarized	Horizontal Type	CCT1302-0101	CCT1304-0101	CCT1306-0101
	Vertical Type	CCT1302-0102	CCT1304-0111	CCT1306-0111
W/ Polarized	Horizontal Type	CCT1302-0201	CCT1304-0201	CCT1306-0202
	Vertical Type	CCT1302-0202	CCT1304-0211	CCT1306-0212

CCT 2302-0371




CCT 2102-0201



CCT 3302-0501C




CCT 9304-0201

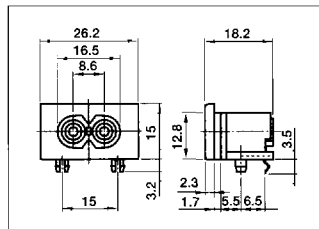


AC INLET (DIP TYPE)
ACインレット (DIPタイプ)

- Rating: 2.5A 250V AC
- Insulation Resistance: 300MΩ min. at 500V DC
- Withstanding Voltage: 2000V AC for one minute
- Approved Standard: UL, CSA, SEV, VDE, SEMKO, DEMKO, NEMKO

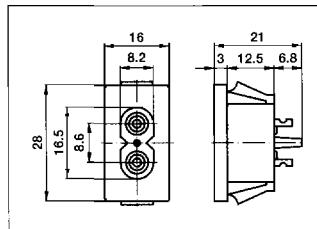


AC INLET (IEC TYPE)
ACインレット (IECタイプ)

- Rating: 2.5A 250V AC
- Insulation Resistance: 300MΩ min. at 500V DC
- Withstanding Voltage: 2000V AC for one minute
- Approved Standard: UL, CSA, BSI, VDE, SEMKO, DEMKO

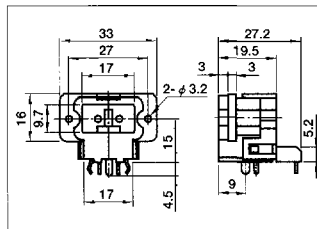

AC INLET (WITH SWITCH)
ACインレット (スイッチ付)

- Rating: 7A 125V AC
3A 15V DC (Switch)
- Insulation Resistance: 100MΩ min. at 500V DC
- Withstanding Voltage: 1500V AC for one minute
- Polarized Type: CCT3302-0601C

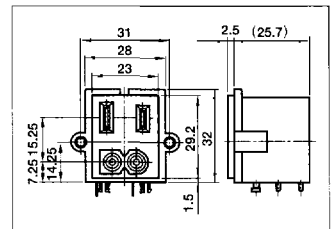

AC INLET/OUTLET
ACインレット・アウトレット一体タイプ

- Rating: 5A 125V AC
- Insulation Resistance: 300MΩ min. at 500V DC
- Withstanding Voltage: 2000V AC for one minute
- Approved Standard: UL, CSA

CCT 5902-0901




CCT 5902-0701



TERMINAL CONNECTOR BOARD




CCT 9903-0202




AC ADAPTER
ACアダプタ

- Rating: 6A 125V/250V AC
- Insulation Resistance: 100MΩ min. at 500V DC
- Withstanding Voltage: 2000V AC for one minute
- Approved Standard: UL, ▽

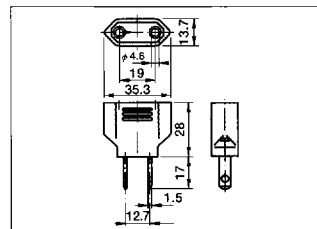

AC ADAPTER
ACアダプタ


- Rating: 6A 125V/250V AC
- Insulation Resistance: 100MΩ min. at 500V DC
- Withstanding Voltage: 2000V AC for one minute
- Approved Standard: UL, ▽

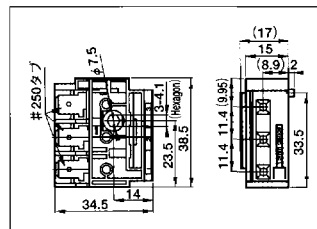

TERMINAL CONNECTOR BOARD
端子台コネクタ

- Rating: 20A 300V AC
- Contact Resistance: 2mΩ max. (Conductor Resistance Excepted)
- Insulation Resistance: 100MΩ min at 500V DC
- Withstanding Voltage: 2500V AC for one minute
- Applicable Wire: φ1.6mm, φ2.0mm VVF Soft Copper Single Wire

DL-A Series

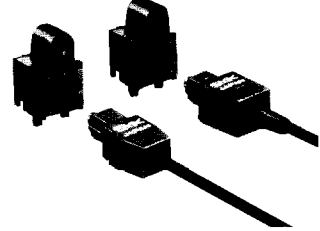

OPTICAL LINK FOR DIGITAL AUDIO
デジタルオーディオ用光リンク

型 式	図 番
プラグコード	CDL1711-04□□
送信用リセプタクル	CDL3611-0315
リセプタクル保護キャップ	221 CDL-008-02

特長

- バルス幅歪、ジッターが小さく、デジタルオーディオに最適な光コネクタです。
- EIAJ・RCZ-6901「デジタルオーディオ機器用光コネクタ」適合品です。