

Small Signal Product

500mW High Speed SMD Switching Diode

FEATURES

- Designed for mounting on small surface
- Extremely thin/leadless package
- High mounting capability, strong surge with stand, high reliability
- Pb free version and RoHS compliant
- Halogen free



1206



MECHANICAL DATA

- Case : 1206 standard package, molded plastic
- Terminal : Gold plated, solderable per MIL-STD-750, method 2026 guaranteed
- High temperature soldering guaranteed : 260°C/10s
- Polarity : Indicated by cathode band
- Weight : 0.010 g (approximately)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNITS
Power dissipation	P _D	500	mW
Non-repetitive peak reverse voltage	V _{RSM}	100	V
Repetitive peak reverse voltage	V _{RRM}	75	V
Repetitive peak forward current	I _{FRM}	300	mA
Mean forward current	I _O	150	mA
Non-repetitive peak forward surge current Tp = 1sec square waveform Tp = 8.3ms single half sine waveform	I _{FSM}	0.5	A
		2.0	
Thermal resistance form junction ambient (Note 1)	R _{θJA}	375	°C/W
Junction and storage temperature range	T _J , T _{STG}	- 65 to + 175	°C

PARAMETER	SYMBOL	MIN	MAX	UNITS
Reverse breakdown voltage (Note 2)	V _(BR)	75	-	V
Forward voltage I _F =100mA	V _F	-	1	V
Reverse leakage current V _R =20V V _R =75V	I _R	-	25	nA
		-	5	μA
Junction capacitance V _R =0, f=1.0MHz	C _J		4.0	pF
Reverse recovery time (Note 3)	T _{rr}		4	ns

Note: 1 Valid provided that electrodes are kept at ambient temperature

Note: 2 Test Condition : I_R=100μA

Note: 3 Test Condition : I_F=10mA, I_R=1mA, R_L=100Ω

Small Signal Product

ORDERING INFORMATION					
PART NO.	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING	MANUFACTURE CODE
TS4148	RX	Suffix "G"	1206	5K / 7" Reel	(Note)
	RA			10K / 13" Reel	

Note : Manufacture special control, if empty means no special control requirement.

EXAMPLE					
PREFERRED P/N	PART NO.	PACKING CODE	GREEN COMPOUND CODE	MANUFACTURE CODE	DESCRIPTION
TS4148 RXG	TS4148	RX	G		Green compound
TS4148 RXG	TS4148	RX	G	C0	Green compound

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

Fig. 1 Typical Forward Characteristics

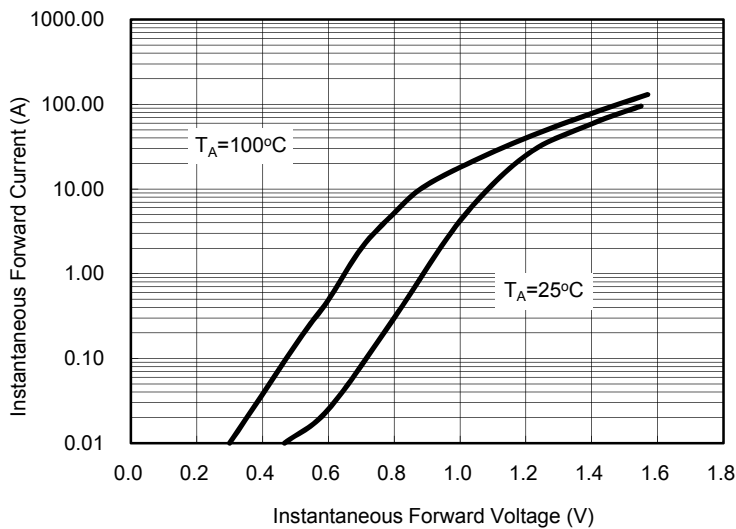


Fig. 2 Reverse Current VS. Reverse Voltage

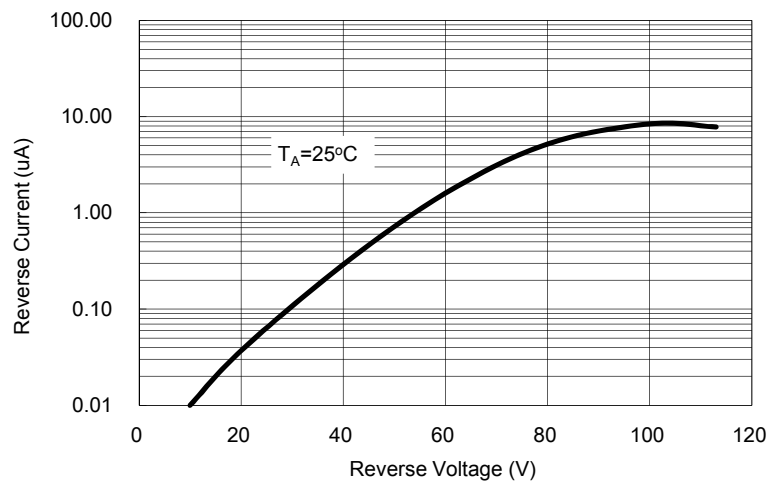


Fig. 3 Admissible Power Dissipation Curve



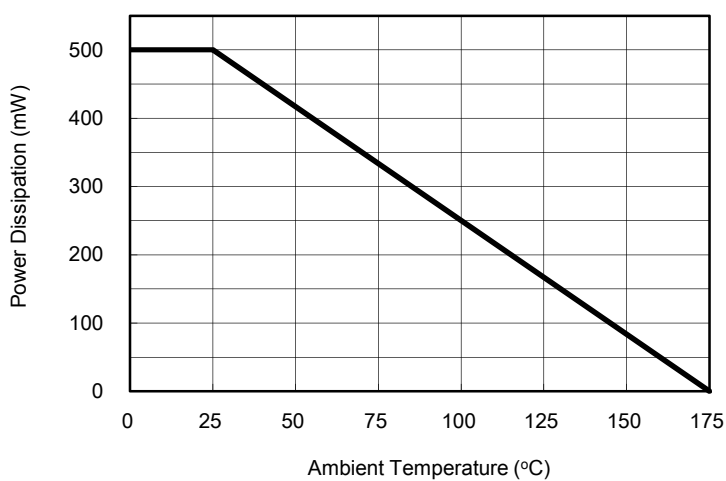


Fig. 4 Typical Junction Capacitance

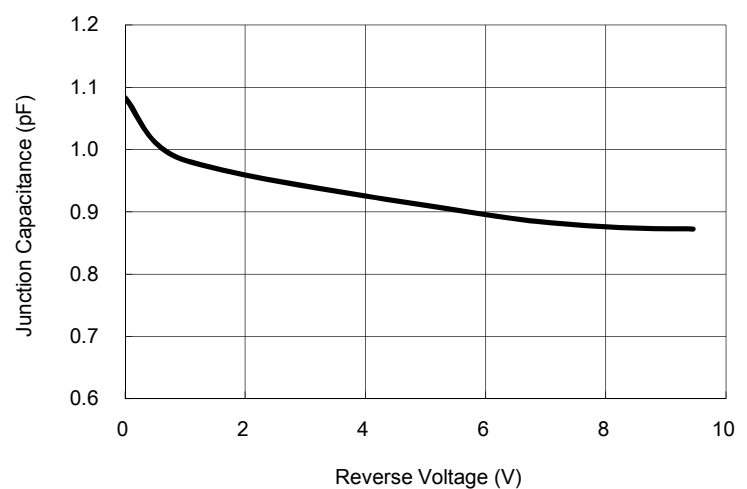


Small Signal Product

Fig. 5 Forward Resistance VS. Forward Current

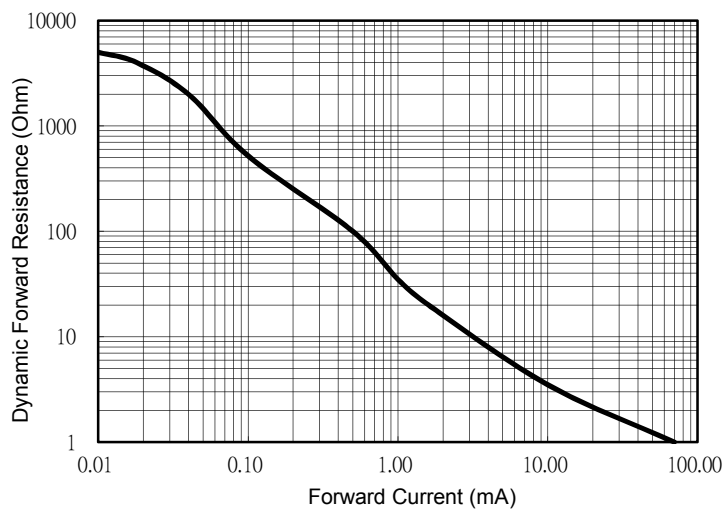

DIMENSIONS

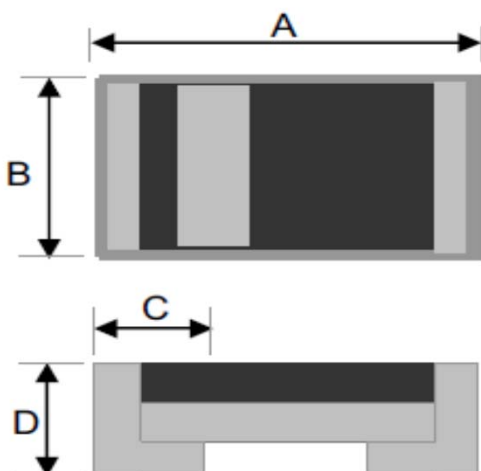

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	3.00	3.40	0.118	0.134
B	1.30	1.70	0.051	0.067
C	0.35	0.75	0.014	0.030
D	0.75	0.95	0.030	0.037