


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

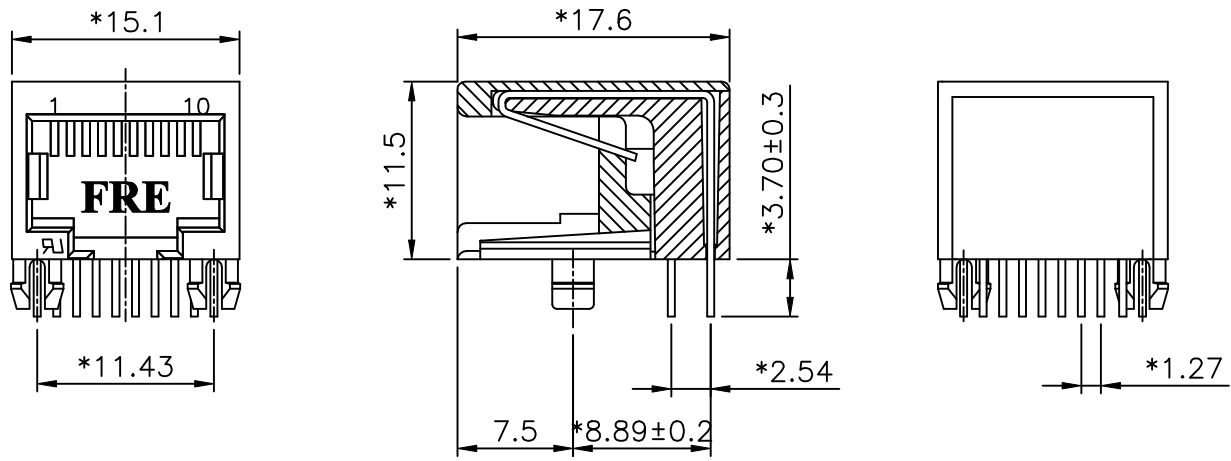

NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE: 1000MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : NYLON+30%.G.F (FR52) UL94V-0.
- 2. STAND COLOR : BLACK
- 3. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- 4. PLATING : 1: CONTACT AREA- SELECTIVE GOLD PLATING.
2: TAILS-GOLD PLATING TIN OVER NICKEL.
- 5. OPERATING LIFE : 750 CYCLES MIN.
- 6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
- 7. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION: 0°C TO 70°C.
- 3. WAVE SOLDERING TEMPERATURE: 255°C~265°C (5~10 SECONDS)


PC Board Layout Component Side Shown

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

CUL FILE NO. E163191

ROHS PART NUMBER: E560X-X0038X-L

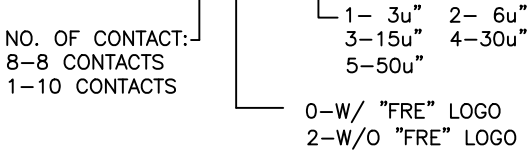

DETACHED LISTS	MM (INCH)		DFTO JamYin	DATE 10/20/05		FULL RISE ELECTRONIC CO., LTD				
	TOLERANCES EXCEPT AS NOTED		CHKD ANKUE		DATE 2005/10/24					
			MFO		DATE		TITLE			
	APPV LUSHENG		DATE 2005/10/24							
	MM .0 ± 0.2 .00 ± 0.15 .000 ± 0.075		± ± ±		MATERIAL :		11.5 SIDE ENTRY PCB JACK			
	ANGLES ± 0.5		QTY :		DRAWING NO. GE563045-LA				SIZE	REV
			FINISH :		/PART NO. SEE NOTE				A3	10/20/05
	THIRD ANGLE PROJECTION		SCALE :		DO NOT SCALE DRAWING 1:1				SHEET 1	OF 1