


# SURFACE MOUNT-CERAMIC ATTENUATOR, PIN DIODE

150-2000 MHz

# MODEL PI-810






## FEATURES

- PCS Frequency Coverage: 150-2000 MHz
- Balanced 4 Diode  $\pi$  Configuration Increases Attenuation and Doubles Upper Frequency Limit
- Low VSWR and Flat Attenuation Characteristics
- Silicon PIN Diodes on Ceramic Offer Improved Insertion Loss Compared to GaAs
- Superior Intermodulation Distortion Characteristics
- Inherently Compensates for VSWR and Temperature Variations
- Rugged Alumina "Surfpac" Package Ideal for Surface Mount Applications
- Can be Optimized Over Lower Frequency Ranges by Changing Capacitor Values
- BEST CHOICE for PCS and GSM Applications
- Lower Cost Alternative to PI-820 Version

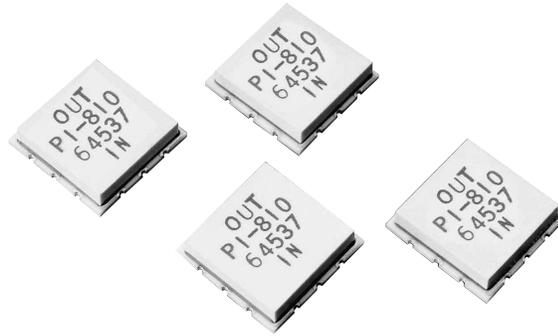

## ELECTRICAL SPECIFICATIONS

|                                |   |
|--------------------------------|---|
| <b>Frequency Range:</b>        | 150 - 2000 MHz  |
| <b>Insertion Loss:</b>         | 4.0 dB typical  |
| <b>Attenuation Range:</b>      | 0 - 30 dB typical   |
| <b>VSWR:</b>                   | 1.5:1 maximum   |
| <b>DC Supply:</b>              | +5V DC at 20 mA maximum   |
| <b>Control Voltage:</b>        | 0V / 10V at 15 mA maximum for Attenuation/Insertion Loss                                  |
| <b>1 dB Compression Point:</b> | +27 dBm   |
| <b>Attenuation Accuracy:</b>   | +/-0.75dB to 20dB<br>+/-1.50dB to 30dB  |
| <b>Temperature:</b>            | -10 to +80°C. See application note for recommended maximum reflow soldering temperatures. |

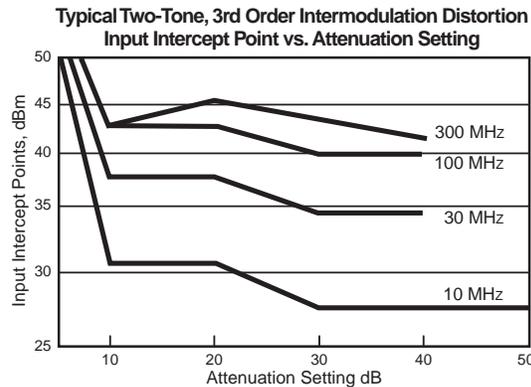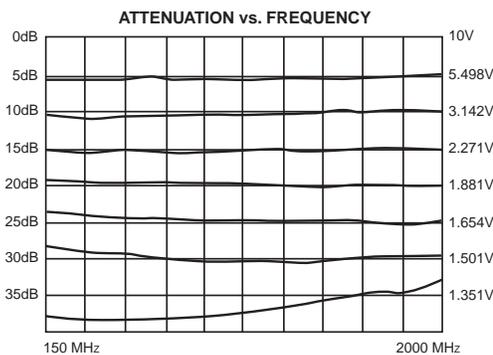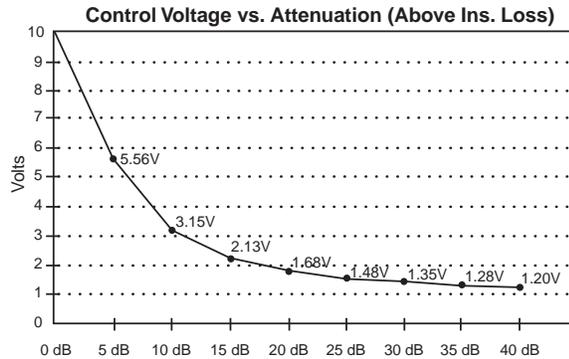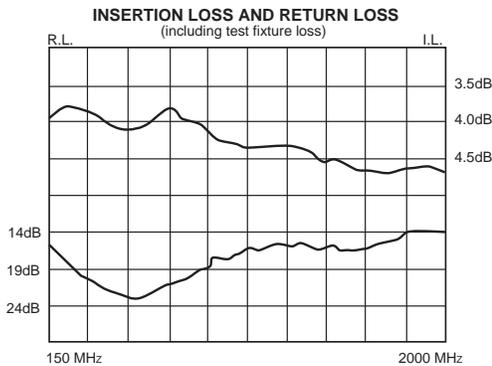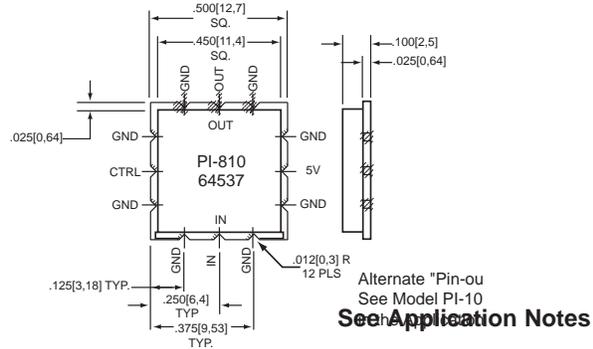

KEY: Inches[Millimeters] .XX ±.03 .XXX ±.010 [.X ±0.8 .XX ±0.25]