

RF AMPLIFIER

MODEL *TM6675*

Available as: TM6675, 4 Pin TO-8 (T4)
 TN6675, 4 Pin Surface Mount (SM3)
 FP6675, 4 Pin Flatpack (FP4)
 BX6675, Connectorized Housing (H1)

Features

- High Gain: 20.5 dB Typical
- Low DC Power: +65 mW @ 5V Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 500 MHz	5 - 500 MHz
Gain (dB)	20.5	19.0 Min.
Power @ 1 dB Comp. (dBm)	+5	+4.0 Min.
Reverse Isolation (dB)	-23.5	-22.5 Max.
VSWR In	<1.5:1	2.0:1 Max.
VSWR Out	<1.5:1	2.0:1 Max.
Noise figure (dB)	2.3	3.0 Max.
Power Vdc	+15	+15
Power mA	15	17 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +26 dBm (Typ.)
 Second Order Two Tone Intercept Point +21 dBm (Typ.)
 Third Order Two Tone Intercept Point +18 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power.....50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

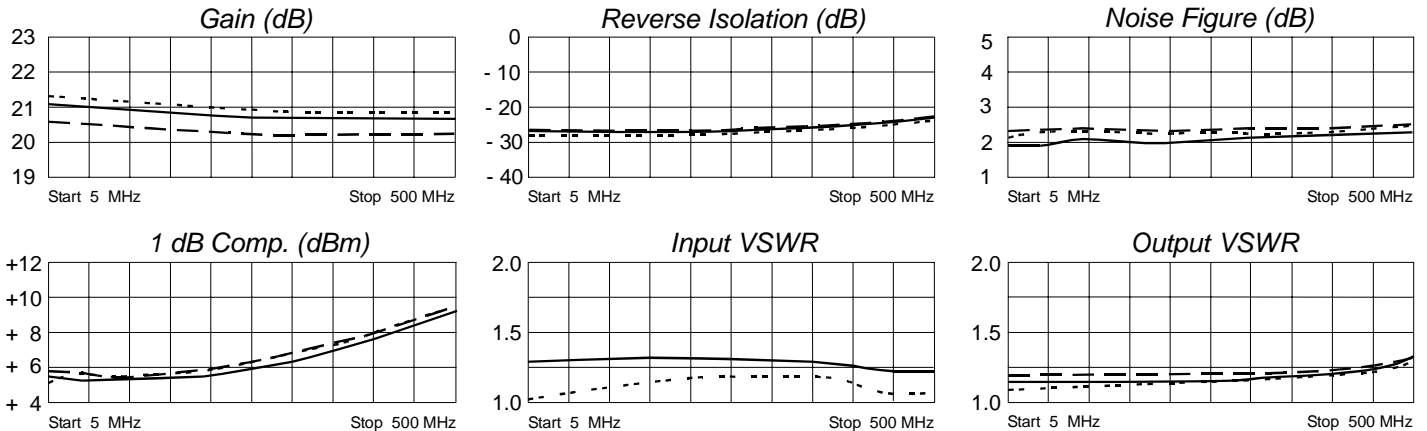

Legend ——— + 25 °C - - - - + 85 °C ······ -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.14	0	11.31	-179	.05	3	.07	- 5
50	.14	- 2	11.19	168	.05	- 2	.08	- 9
100	.15	- 5	11.09	156	.05	- 1	.08	- 22
200	.14	- 17	10.89	132	.05	- 5	.08	- 51
300	.13	- 32	10.71	109	.05	- 6	.07	- 92
400	.10	- 61	10.68	84	.06	-10	.08	-154
500	.08	-126	10.64	58	.06	-14	.15	148



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 04/11/05

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001