


MATERIALS	
CONNECTOR	PASSIVATED STAINLESS STEEL
CONTACT	GOLD PLATED
INSULATOR	PTFE
HEAT SINK	ANODIZED ALUMINUM



## SPECIFICATIONS

FREQUENCY RANGE: DC TO 18 GHz  
 POWER HANDLING CAPABILITY: 10 WATTS  
 MAXIMUM VSWR: 1.40

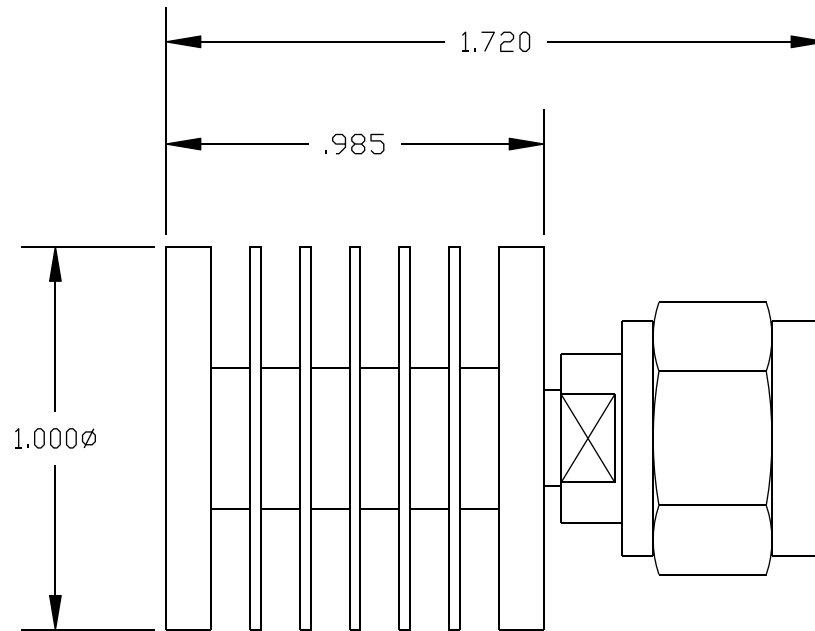

**PASTERNAK ENTERPRISES, INC.**

P.O. BOX 16759, IRVINE, CA 92623  
 PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
 E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)

**COAXIAL & FIBER OPTICS**

DWG TITLE

**PE6104**

DES.

TNC MALE HIGH POWER TERMINATION  
 FREQUENCY RANGE: DC TO 18 GHz

REV. A

**FSCM NO. 53919**

CAD FILE 082908

SCALE N/A

SIZE A 127

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.