

BAYFRONT SERIES B7100 STANDARD (S)

FEATURES:

• Diffused Lens

• Instant O

Directional Efficience

Mercury Fre

Low Profile

• Lead Free

• Long Life

• No UV

The Bayfront series features a sturdy aluminum housing for greater durability and a diffused lens to maximize output uniformity.

SPECIFICATIONS

Color Temperature	Lumen Output	Efficacy (lm/W)	Color Rendering Index (CRI)
Cool (C) - 6500K	180	45	80
Neutral (N) - 4500K	170	43	75
Warm (W) - 3000K	160	40	70
Soft (S) - 2700K	160	40	66

Rated Life:	50,000 hours	
Beam Angle:	120°	
Power Consumption:	4 Watts	
Operating Temperature:	0° C ~+ 40° C	
Voltage Input:	24VDC, Constant Voltage	
Controls:	See Accessory SW-1001	
Housing:	Extruded Aluminum, Black Polycarbonate Lens, Frosted	
Weight:	136	
Dimensions:	W .63" (15.69mm)	
	H .75" (19.1mm)	
	L 12" (304.8mm) ** **not including mounts	


Compliance:





Restriction of Hazardous Substances Directive (RoHS) implements EU Directive 2002 / 95 which bans placing electrical and hazardous equipment that contains more than agreed levels of hazardous substances on the EU market. For a list of these substances, visit www.rohs.gov.uk.


DIMENSIONS

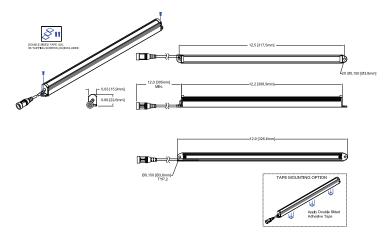

BAYFRONT SERIES B7100 STANDARD (S)

ORDERING INFORMATION

Choose the option that best suits your needs and write in corresponding code on the appropriate line to form product code.

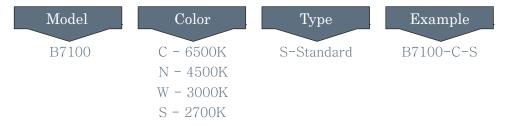

All luminaires are easily customizable. Please contact us to inquire about customizing a luminaires to fill your needs.

Order power accessories as separate catalog numbers from the Accessories section below. (Note: 2 mounting screws and double sided tape included for mounting of Standard luminaires.)

ACCESSORIES

Universal Regulated Quick Connect Power Supply (North American Plug)
Universal Regulated Quick Connect Power Supply (Euro Plug)
In-line On/Off Switch

Califia Lighting Part #WA-UL-001 Califia Lighting Part #WA-VDE-001 Califia Lighting Part #SW-1001

PHOTOMETRY CHARACTERISTICS

