
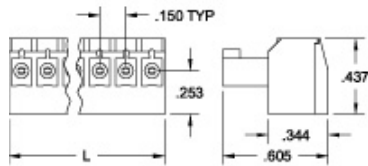


## .150" (3.81mm) ELVP Plug



View part [PDF File](#)

Download part [DXF File](#)

## Right Angle

- [Product Intro.](#)
- [Variations](#)
- [Gold Plating](#)
- [Locking Ears](#)
- [Marking](#)
- [Mating Header](#)

All ELV pluggable terminal blocks incorporate moving vise clamp

Pos	Catalog # Black	Catalog # Green	L (In.)
2	ELVP02100	ELVP021G0	.300
3	ELVP03100	ELVP031G0	.450
4	ELVP04100	ELVP041G0	.600
5	ELVP05100	ELVP051G0	.750
6	ELVP06100	ELVP061G0	.900
7	ELVP07100	ELVP071G0	1.050
8	ELVP08100	ELVP081G0	1.200
9	ELVP09100	ELVP091G0	1.350
10	ELVP10100	ELVP101G0	1.500
11	ELVP11100	ELVP111G0	1.650
12	ELVP12100	ELVP121G0	1.800
13	ELVP13100	ELVP131G0	1.950
14	ELVP14100	ELVP141G0	2.100
15	ELVP15100	ELVP151G0	2.250
16	ELVP16100	ELVP161G0	2.400
17	ELVP17100	ELVP171G0	2.550
18	ELVP18100	ELVP181G0	2.700
19	ELVP19100	ELVP191G0	2.850
20	ELVP20100	ELVP201G0	3.000

wire termination and mate with Amphenol Pcd ELVH headers.

ELVP blocks feature wire entry parallel to contact.

### SPECIFICATIONS:

Current Rating: 12A

Operating Voltage: 300V

Insulation Resistance: >10<sup>3</sup> Megohms

Dielectric Withstanding: <1600V

Wire Pullout Force: Per UL 486E, Section 14

**MATERIALS:**

Housing: PPO, UL 94V-0, Black or green  
Contact: Copper alloy, optional finish  
Clamp Screw: Steel, nickel finish  
Wire clamp: Copper alloy, nickel finish

**INSTALLATION:**

Wire Range: 16-28 AWG  
Wire Strip Length: .25" (.375" ELVF)  
Tightening Torque: 2.2 lb-in. (0.25N-m)

**APPROVALS:**

