



# Heyco® Thick Panel Rubber Grommets


For Panels .250" (6,4 mm) to .375" (9,5 mm) Thick

MOUNTING HOLE DIAMETER		PART NO. Black	DESCRIPTION	PART DIMENSIONS					
in.	mm.			A Inside Diameter		B Head Diameter		C Overall Height	
				in.	mm.	in.	mm.	in.	mm.
<b>For .250" (6,4 mm) Thick Panels</b>									
.312	7,9	<b>G1023</b>	RG 312-6-8	.188	4,8	.437	11,1	.375	9,5
.437	11,1	<b>G1058*</b>	RG 437-8-8	.250	6,4	.625	15,9		
.500	12,7	<b>G1086*</b>	RG 500-10-8	.313	8,0	.625	15,9	.625	15,9
		<b>G1095</b>	RG 500-12-8	.375	9,5	.750	19,1	.500	12,7
.562	14,3	<b>G1117*</b>	RG 562-10-8	.313	8,0	.812	20,6		
.625	15,9	<b>G1134</b>	RG 625-12-8	.375	9,5	.875	22,2	.500	12,7
.687	17,5	<b>G1154</b>	RG 687-14-8	.438	11,1	.937	23,8		
.812	20,6	<b>G1195</b>	RG 812-16-8	.500	12,7	1.062	27,0	.500	12,7
		<b>G1200</b>	RG 812-18-8	.562	14,3				
.875	22,2	<b>G1220</b>	RG 875-20-8	.625	15,9	1.125	28,6	.500	12,7
1.000	25,4	<b>G1257</b>	RG 1000-22-8	.687	17,5	1.312	33,3	.562	14,3
		<b>G1264</b>	RG 1000-28-8	.875	22,2	1.250	31,8	.625	15,9
1.062	27,0	<b>G1273</b>	RG 1062-24-8	.750	19,1	1.375	34,9	.562	14,3
1.250	31,8	<b>G1301</b>	RG 1250-24-8	.750	19,1	1.625	41,3	.438	11,1
		<b>G1307</b>	RG 1250-28-8	.875	22,2	1.625	41,3	.625	15,9
1.375	34,9	<b>G1324</b>	RG 1375-32-8	1.000	25,4	1.750	44,5	.625	15,9
		<b>G1353</b>	RG 1500-40-8	1.250	31,8	1.750	44,5	.500	12,7
1.500	38,1	<b>G1354</b>	RG 1500-40-8A	1.250	31,8	2.000	50,8	.516	13,1
		<b>G1373</b>	RG 1750-48-8	1.500	38,1	2.000	50,8	.500	12,7
1.750	44,5	<b>G1374</b>	RG 1750-48-8A	1.500	38,1	2.125	54,0	.625	15,9
		<b>G1393</b>	RG 2000-56-8	1.750	44,5	2.500	63,5	.531	13,5
2.000	50,8	<b>G1394*</b>	RG 2000-56-8A	1.750	44,5	2.500	63,5	.560	14,2
		<b>G1421</b>	RG 2.5-64-8	2.000	50,8	3.000	76,2	.562	14,3
2.500	63,5	<b>G1425</b>	RG 2.5-72-8	2.250	57,2	3.000	76,2	.625	15,9
		<b>For .375" (9,5 mm) Thick Panels</b>							
.375	9,5	<b>G1043</b>	RG 375-10-12	.313	8,0	.562	14,3	.500	12,7
.500	12,7	<b>G1096</b>	RG 500-12-12	.375	9,5	.625	15,9	.625	15,9
.562	14,3	<b>G1121</b>	RG 562-12-12	.375	9,5	.750	19,1	.750	19,1
.625	15,9	<b>G1136</b>	RG 625-13-12	.406	10,3	.812	20,6		
.750	19,1	<b>G1182</b>	RG 750-16-12	.500	12,7	1.000	25,4		
.875	22,2	<b>G1214</b>	RG 875-18-12	.562	14,3	1.062	27,0	.625	15,9
1.000	25,4	<b>G1249</b>	RG 1000-18-12	.562	14,3	1.250	31,8		
1.125	28,6	<b>G1278</b>	RG 1125-24-12	.750	19,1	1.625	41,3	1.125	28,6
1.250	31,8	<b>G1308**</b>	RG 1250-28-12	.875	22,2	1.750	44,5	.750	19,1
		<b>G1314</b>	RG 1250-32-12	1.000	25,4	1.500	38,1	.625	15,9
1.375	34,9	<b>G1326</b>	RG 1375-32-12	1.000	25,4	1.750	44,5	.750	19,1
1.750	44,5	<b>G1375</b>	RG 1750-48-12	1.500	38,1	2.125	54,0		
2.000	50,8	<b>G1395</b>	RG 2000-56-12	1.750	44,5	2.500	63,5	.625	15,9
2.500	63,5	<b>G1427</b>	RG 2.5-72-12	2.250	57,2	3.000	76,2	.750	19,1

Standard color black. \*Nitrile \*\*Neoprene



- Used to protect through holes. Help eliminate sharp edges so your wires are protected and add aesthetic value to your application.
- 38 sizes available that accommodate mounting holes ranging from .312" (7,9 mm) to holes as large as 2.50" (63,5 mm) in diameter and panel thicknesses of .250" (6,4 mm) and .375" (9,5 mm).
- Rubber grommets are constructed of SBR (unless otherwise noted) with an operating temperature range of -40°F (-40°C) to 221°F (105°C).
- SBR grommets have good water resistant characteristics and are suitable for most moderate chemicals and wet or dry organic acids.
- Provides vibration dampening.

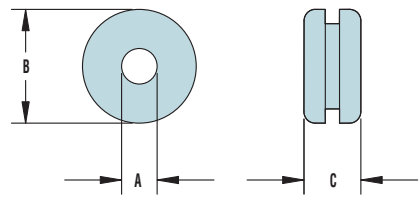

**Material** SBR (Styrene Butadiene)  
**Temperature Rating** -40°F (-40°C) to 221°F (105°C)

Quick Specs

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Heyco:

[G1023](#) [G1278](#) [G1257](#) [G1195](#) [G1395](#) [G1134](#) [G1394](#) [G1273](#) [G1393](#) [G1136](#) [G1117](#) [G1043](#) [G1154](#) [G1421](#)  
[G1214](#) [G1220](#) [G1308](#) [G1324](#) [G1264](#) [G1374](#) [G1307](#) [G1427](#) [G1425](#) [G1314](#) [G1200](#) [G1301](#) [G1375](#) [G1354](#)  
[G1086](#) [G1096](#) [G1121](#) [G1182](#) [G1095](#) [G1353](#) [G1058](#) [G1326](#) [G1249](#) [G1373](#)