

## Ventilateurs à filtre 94-169 pi<sup>3</sup>/min Série PF GEN4

Type 12



- Maintient le degré d'étanchéité UL/ NEMA, type 12
- Homologués UL, norme UL 508a, catégorie NITW2/8, fichier UL no E175229
- Conception encliquetable brevetée permettant une installation sans quincaillerie!
- Plastique fait à partir d'un matériau coupe-feu robuste, homologué UL 94 VO et résistant à la chaleur (ABS-FR)
- Le moteur de ventilateur est homologué CSA
- Options : Grilles noires

### Accessoires


[Exhaust Filters](#)

[Replacement Filters](#)




#### Airflow Data:


PF 42.500 IP55 / PFA 40.000 IP55

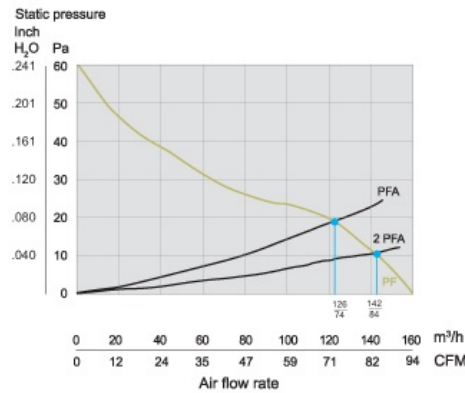

PF 43.000 IP55 / PFA 40.000 IP55

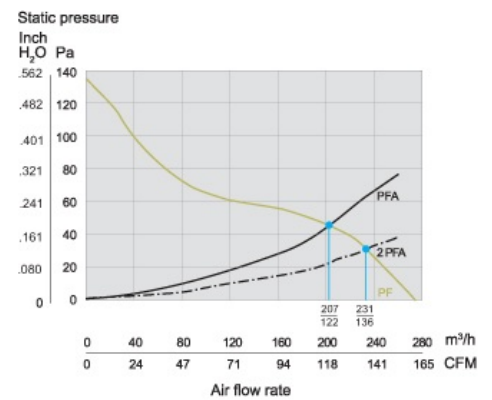

#### Mechanical Data:

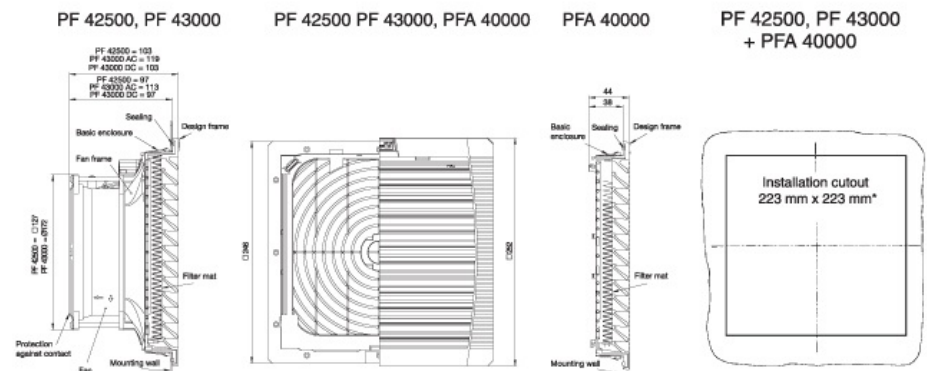

Part Number	Voltage	Power	Mating Exhaust Filter	Ship Wt. lbs.
PF42500T12LG	115V	20W	PFA 40000LG	4

<b>PF42500T12LG230</b>	230V	18W	<b>PFA 40000LG</b>	4
<b>PF42500T12LG24</b>	24V	5W	<b>PFA 40000LG</b>	4
<b>PF43000T12LG</b>	115V	40W	<b>PFA 40000LG</b>	5
<b>PF43000T12LG230</b>	230V	39W	<b>PFA 40000LG</b>	5
<b>PF43000T12LG24</b>	24V	12W	<b>PFA 40000LG</b>	5

<b>Airflow data</b>	<b>PF 42500</b>	<b>PF 43000</b>	<b>PFA 40000</b>
Filter material	NEMA Type 12 Filtermat	NEMA Type 12 Filtermat	NEMA Type 12 Filtermat
Unimpeded airflow	94 CFM	169 CFM	-
Capacity free-flow	53 W/K	188 W/K	-
Airflow in combination	67 CFM	142 CFM	-
(Filterfan + Exhaust Filter)	(PF 42500 + PFA 40000)	(PF 43000 + PFA 40000)	-
Capacity in combination	38 W/K	69 W/K	-
(Filterfan + Exhaust Filter)	(PF 43000 + PFA 40000)	(PF 43000 + PFA 40000)	-
Max. static pressure (Airflow = 0 m <sup>3</sup> /h)	49 Pa	112 Pa	-
Filtration efficiency	0.91	0.91	0.91
Filter material grade	G 4 (DIN EN 779)	G 4 (DIN EN 779)	G 4 (DIN EN 779)
Duty cycle	1	1	-

<b>Technical data</b>	<b>PF 42500 AC/DC</b>	<b>PF 43000 AC/DC</b>	<b>PFA 40000</b>
Outside dimensions in mm (height x width x installation depth)	252 x 252 x 97	252 x 252 x 113	252 x 252 x 38
Bearing type / Lagerart	ball bearings	ball bearings	-
Fitting position / Einbaulage	any, horizontal airflow preferred		any
Construction	housing and guard of sprayed thermoplastic, self-extinguishing, UL 94 VO		
Weight	1.18 kg	1.67 kg	0.46 kg
Safety protection	in accordance with DIN 31 001		
Color	RAL 7035, Light Grey		
Connections / Anschlussart	cage clamp	cage clamp	-

<b>Supplementary data</b>	<b>PF 42500</b>	<b>PF 43000</b>	<b>PFA 40000</b>
Operating temperature	- 15 °C (- 5 °F) to / bis + 55 °C (+ 131 °F)		
Storage temperature	- 20 °C (- 4 °F) to / bis + 70 °C (+ 158 °F)		
Max. relative humidity	0.9		
System of protection	NEMA Type 12, IP 55 (EN 60 529), when installed as specified		
Basic Accessories	parts kit filter mat, user manual radiant heater, fan heater, thermostat, hygrostat		
Approvals	UL Recognized		
* Tolerance installation cutout	177 + 1/-0 thickness of material to 2 mm		
	178 + 1/-0 thickness of material > 2 mm < 3 mm		

*Les données sont sujettes à changement sans préavis.*

