

SBU120 SERIES

120W Open Frame Switching Power Supplies For I.T.E.

Description:

The SBU120 series of compact, open frame constructed, AC/DC switching mode power supplies provide 120 Watts of continuous output power. They are suited for use in based systems, portable equipments and many other applications. All models meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL (UL 60950-1:2nd Edition) ,TUV/GS(EN 60950-1:2nd Edition) and new CE requirements. All units are 100% burned in and tested.



Features:

- Wide Operating Voltage 90 to 260 VAC, 47 to 63 Hz
- Internal EMI filter
- Single to Triple Output
- Input connector mates with Molex housing 09-50-3051 and Molex 2478 series crimp terminal
- Output connector mates with Molex housing 09-50-3131 and Molex 2478 series crimp terminal
- Input Surge Current, Over Voltage and Over Load protection
- Output Voltage Protection (Crowbar Design)
- Active Power Factor Correction
- Power Fail Detect (Optional)
- Class I
- Size: 3"x5"x1.32"
- 2 year warranty

Safety Approvals :



Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Safety Approvals Input Voltage Range		100		240	VAC
	Operate Voltage Range		90		260	VAC
fin	Input Frequency		47		63	Hz
PF	Power Factor Correction	Io=Full load, Vin=90~260VAC	0.95	0.97	1.0	
Po	Output Power Range	Vin=90 to 260 VAC	0		120	W
Vo	Output Voltage Range		See rating Chart			V
Io	Output Current Range		See rating Chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC			1.7	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC			1.0	A
Irl	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		30	37	A
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC		65	75	A
Eff	Efficiency	Io=Full load, Vin=230VAC	70	80	88	%
REG-i	Line Regulation	Io=Full load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC		3	5	%
OVP	Over Voltage Protection		112		132	%
OCP	Over Current Protection		110		150	%
Ttr	Time of Transient Response	Io=Full load to Half Load, Vin=100VAC			4	mS
Thold	Hold-Up Time	Io=Full load, Vin=110VAC	16			mS
Ts	Start Up Time	Io=Full load, Vin=100VAC	0.3	1	2	S
* Vp-p	Ripple & Noise (Peak to Peak)	Full load, Vin=90VAC		0.5	1	%
Ilk	Safety Ground Leakage Current	Io=Full load, Vin=240VAC		0.4	0.75	mA
TC	Temperature Coefficient	All output	-0.04		0.04	%/°C

* Note: The Ripple & Noise which is under 3.3VDC at 2% max

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		0	50	70	°C
Tstg	Storage Temperature		-40		85	°C
Ho	Operating Humidity		0		95	%
Hr	Storage Humidity		0		75	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1M			Hrs
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C					

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242			VDC
Vpg	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2121			VDC
Ris	Isolation Resistance	Test Voltage=500VDC	50			MΩ
CISPR	EMI requirements for CISPR-22	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-15	Vin=110VAC	B			CLASS

SBU120 SERIES


120W Open Frame Switching Power Supplies For I.T.E. Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total Regulation	Maximum OUTPut Power
SBU120-101	3 ~ 5 VDC	22.00 ~ 20.00 A	5%	100W
SBU120-102	5 ~ 6 VDC	22.00 ~ 18.33 A	5%	110W
SBU120-103	6 ~ 9 VDC	19.16 ~ 12.77 A	5%	115W
SBU120-104	9 ~ 11 VDC	13.33 ~ 10.90 A	4%	120W
SBU120-105	11 ~ 13 VDC	10.90 ~ 9.23 A	3%	120W
SBU120-106	13 ~ 16 VDC	9.23 ~ 7.50 A	3%	120W
SBU120-107	16 ~ 21 VDC	7.50 ~ 5.71 A	3%	120W
SBU120-108	21 ~ 27 VDC	5.71 ~ 4.44 A	2%	120W
SBU120-109	27 ~ 33 VDC	4.44 ~ 3.63 A	2%	120W
SBU120-110	33 ~ 40 VDC	3.63 ~ 3.00 A	2%	120W
SBU120-111	40 ~ 50 VDC	3.00 ~ 2.40 A	2%	120W

Output Voltage And Current Rating Chart (Multi Output) :

Model Number	Output#1				Output#2				Output#3				Maximum Output Power
	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	
SBU120-200	+3.3V	1.5A	15A	5%	+12V	0.6A	6A	5%					120W
SBU120-201	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%					120W
SBU120-202	+5V	1.5A	15A	5%	+15V	0.6A	6A	5%					120W
SBU120-203	+5V	1.5A	15A	5%	+24V	0.4A	3.5A	5%					120W
SBU120-204	+3.3V	1.5A	15A	5%	+5V	0.8A	6A	5%					79.5W
SBU120-215	+5V	1.5A	15A	5%					-24V	0.2A	2A	5%	120W
SBU120-219	+28V	0.4A	3.92A	5%					+5V	0A	2A	5%	120W
SBU120-300	+3.3V	1.5A	15A	5%	+12V	0.6A	6A	5%	-12V	0A	0.8A	5%	120W
SBU120-300-1	+3.3V	1.5A	15A	5%	+12V	0.6A	6A	5%	+12V	0A	0.8A	5%	120W
SBU120-301	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%	-5V	0A	0.8A	5%	120W
SBU120-301-1	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%	+5V	0A	0.8A	5%	120W
SBU120-302	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%	-12V	0A	0.8A	5%	120W
SBU120-302-1	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%	+12V	0A	0.8A	5%	120W
SBU120-303	+5V	1.5A	15A	5%	+15V	1.0A	6A	5%	-15V	0A	0.8A	5%	120W
SBU120-303-1	+5V	1.5A	15A	5%	+15V	1.0A	6A	5%	+15V	0A	0.8A	5%	120W
SBU120-304	+5V	1.5A	15A	5%	+24V	0.45A	3.5A	5%	-24V	0.25A	0.8A	5%	120W
SBU120-304-1	+5V	1.5A	15A	5%	+24V	0.45A	3.5A	5%	+24V	0.25A	0.8A	5%	120W
SBU120-305	+5V	1.5A	15A	5%	+24V	0.4A	3.5A	5%	-12V	0A	0.8A	5%	120W
SBU120-305-1	+5V	1.5A	15A	5%	+24V	0.4A	3.5A	5%	+12V	0A	0.8A	5%	120W
SBU120-306	+3.3V	1.5A	15A	5%	+12V	0.8A	6A	5%	-5V	0A	0.8A	5%	120W
SBU120-306-1	+3.3V	1.5A	15A	5%	+12V	0.8A	6A	5%	+5V	0A	0.8A	5%	120W
SBU120-307	+5V	1.5A	15A	5%	+10V	0.6A	6A	5%	-10V	0A	1.0A	5%	120W
SBU120-307-1	+5V	1.5A	15A	5%	+10V	0.6A	6A	5%	+10V	0A	1.0A	5%	120W
SBU120-308	+3.3V	1.5A	15A	5%	+5V	0.8A	6A	5%	-12V	0A	1.0A	5%	91.5W
SBU120-308-1	+3.3V	1.5A	15A	5%	+5V	0.8A	6A	5%	+12V	0A	1.0A	5%	91.5W

Mechanical Specifications :

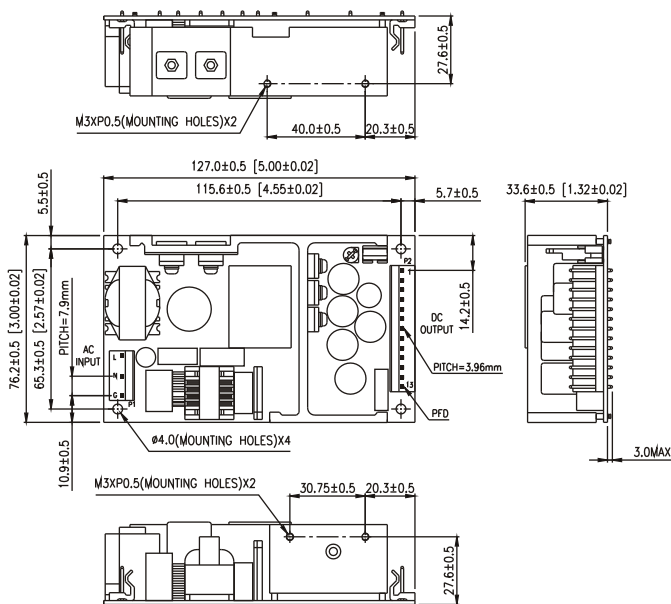

PIN CHART

MODEL	PIN 1	2	3	4	5	6	7	8	9	10	11	12	13 (Optional)
SBU120-1XX-13PIN	OUT	OUT	OUT	OUT	OUT	OUT	RTN	RTN	RTN	RTN	RTN	RTN	PFD
SBU120-219-13PIN	N/C	N/C	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	Vo3	COM	COM	PFD
SBU120-215-13PIN	N/C	N/C	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	Vo3	COM	COM	PFD
SBU120-2XX-13PIN	Vo2	Vo2	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	N/C	COM	COM	PFD
SBU120-3XX-13PIN	Vo2	Vo2	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	Vo3	COM	COM	PFD

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3

Note:

- Dimensions are shown in inches or mm .
- Weight: 350~428gs approx.
- Input connector mates with Molex housing 09-50-3051 and Molex 2478 series crimp terminal.
- Output connector mates with Molex housing 09-50-3131 and Molex 2478 series crimp terminal.