




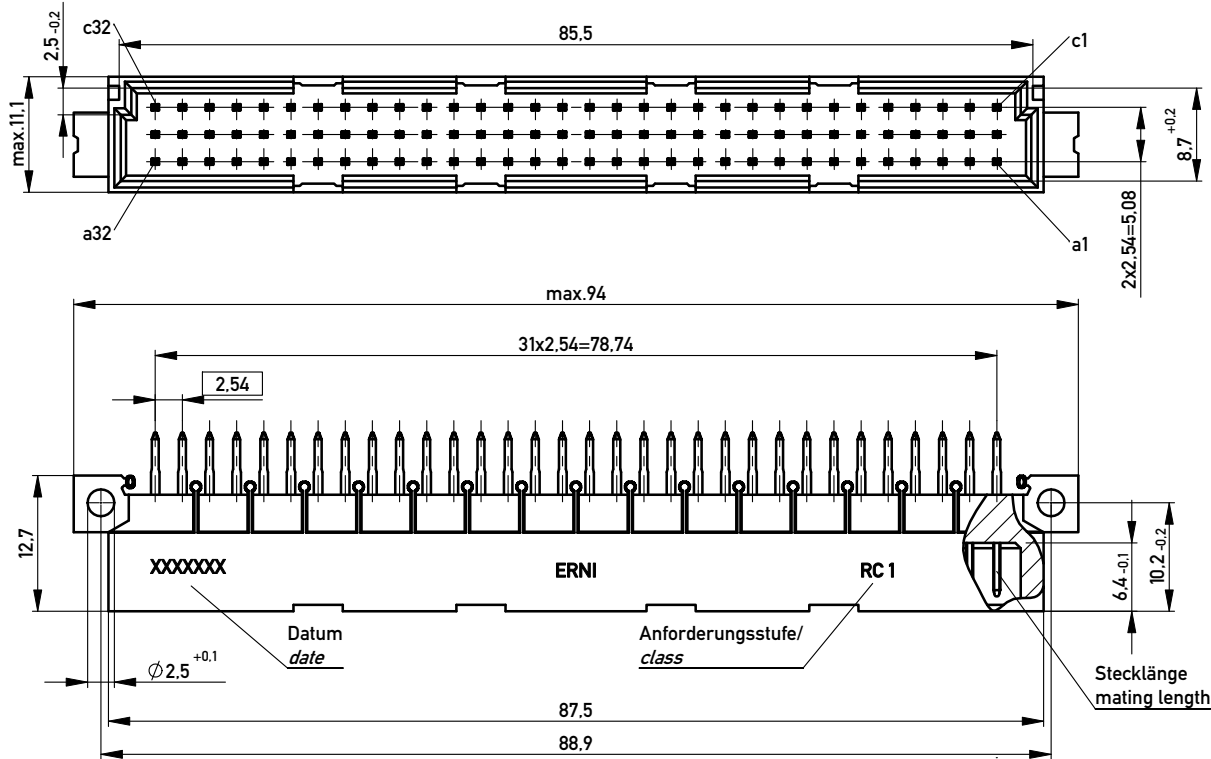


Bestückungsplan / contact layout

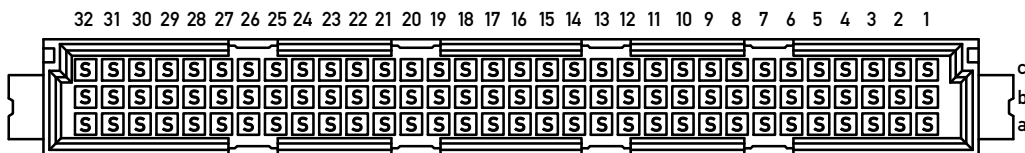

Leiterplatten-Lochbild / PCB drillhole pattern

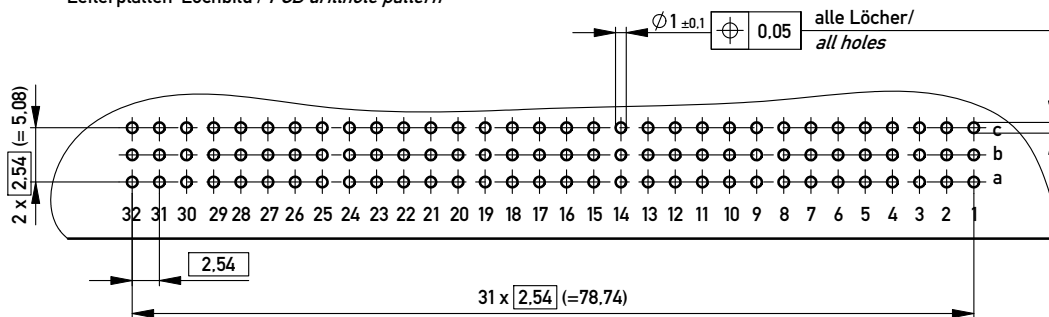


Stecklänge / mating length



E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

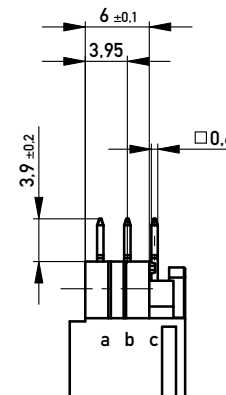

Isolierwerkstoff / housing material : PBT GF 30

Bauart 4 / type 4

Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Lötanschluss 0,6x0,6mm / solder terminal 0,6x0,6mm

Bedruckung siehe Zeichnung 294905

Marking see drawing 294905

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
-		08.06.2009		Messerleiste C 96 Löt Male Connector C96 solder	
Index		Date		384021	
				Class	
				STVC	
				I	
				A3	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

ERNI www.ERNI.com