
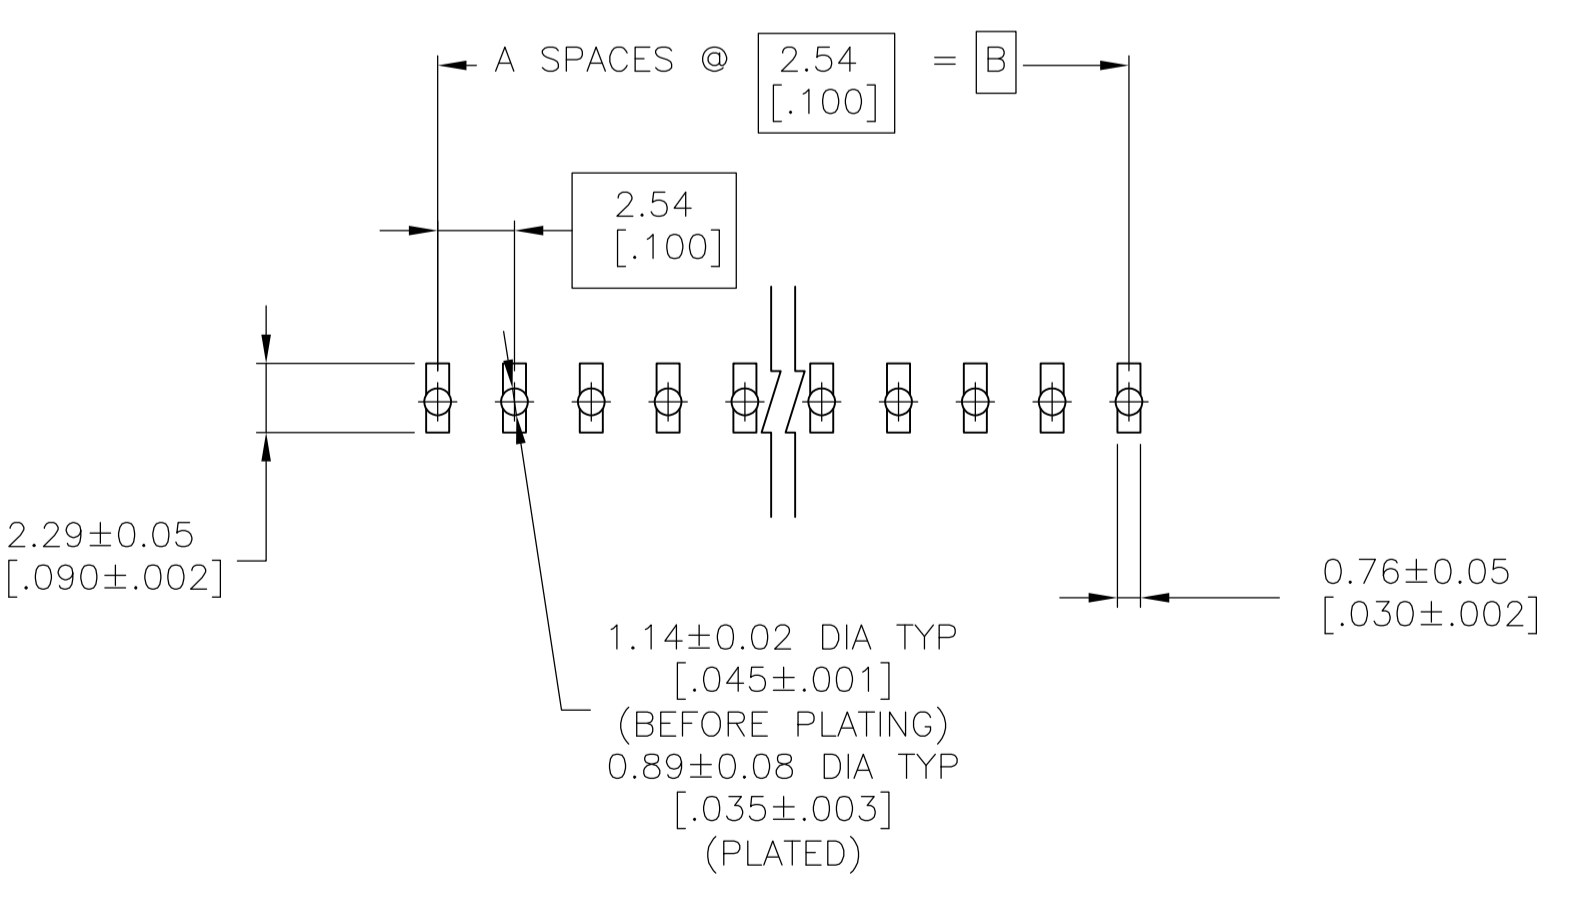


- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN, THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 0.00254-0.00504 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- PARTS PACKAGED IN TUBES.
- HOUSING: LCP, COLOR-BLACK. POSTS: PHOSPHOR BRONZE
- 0.00254-0.00504 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

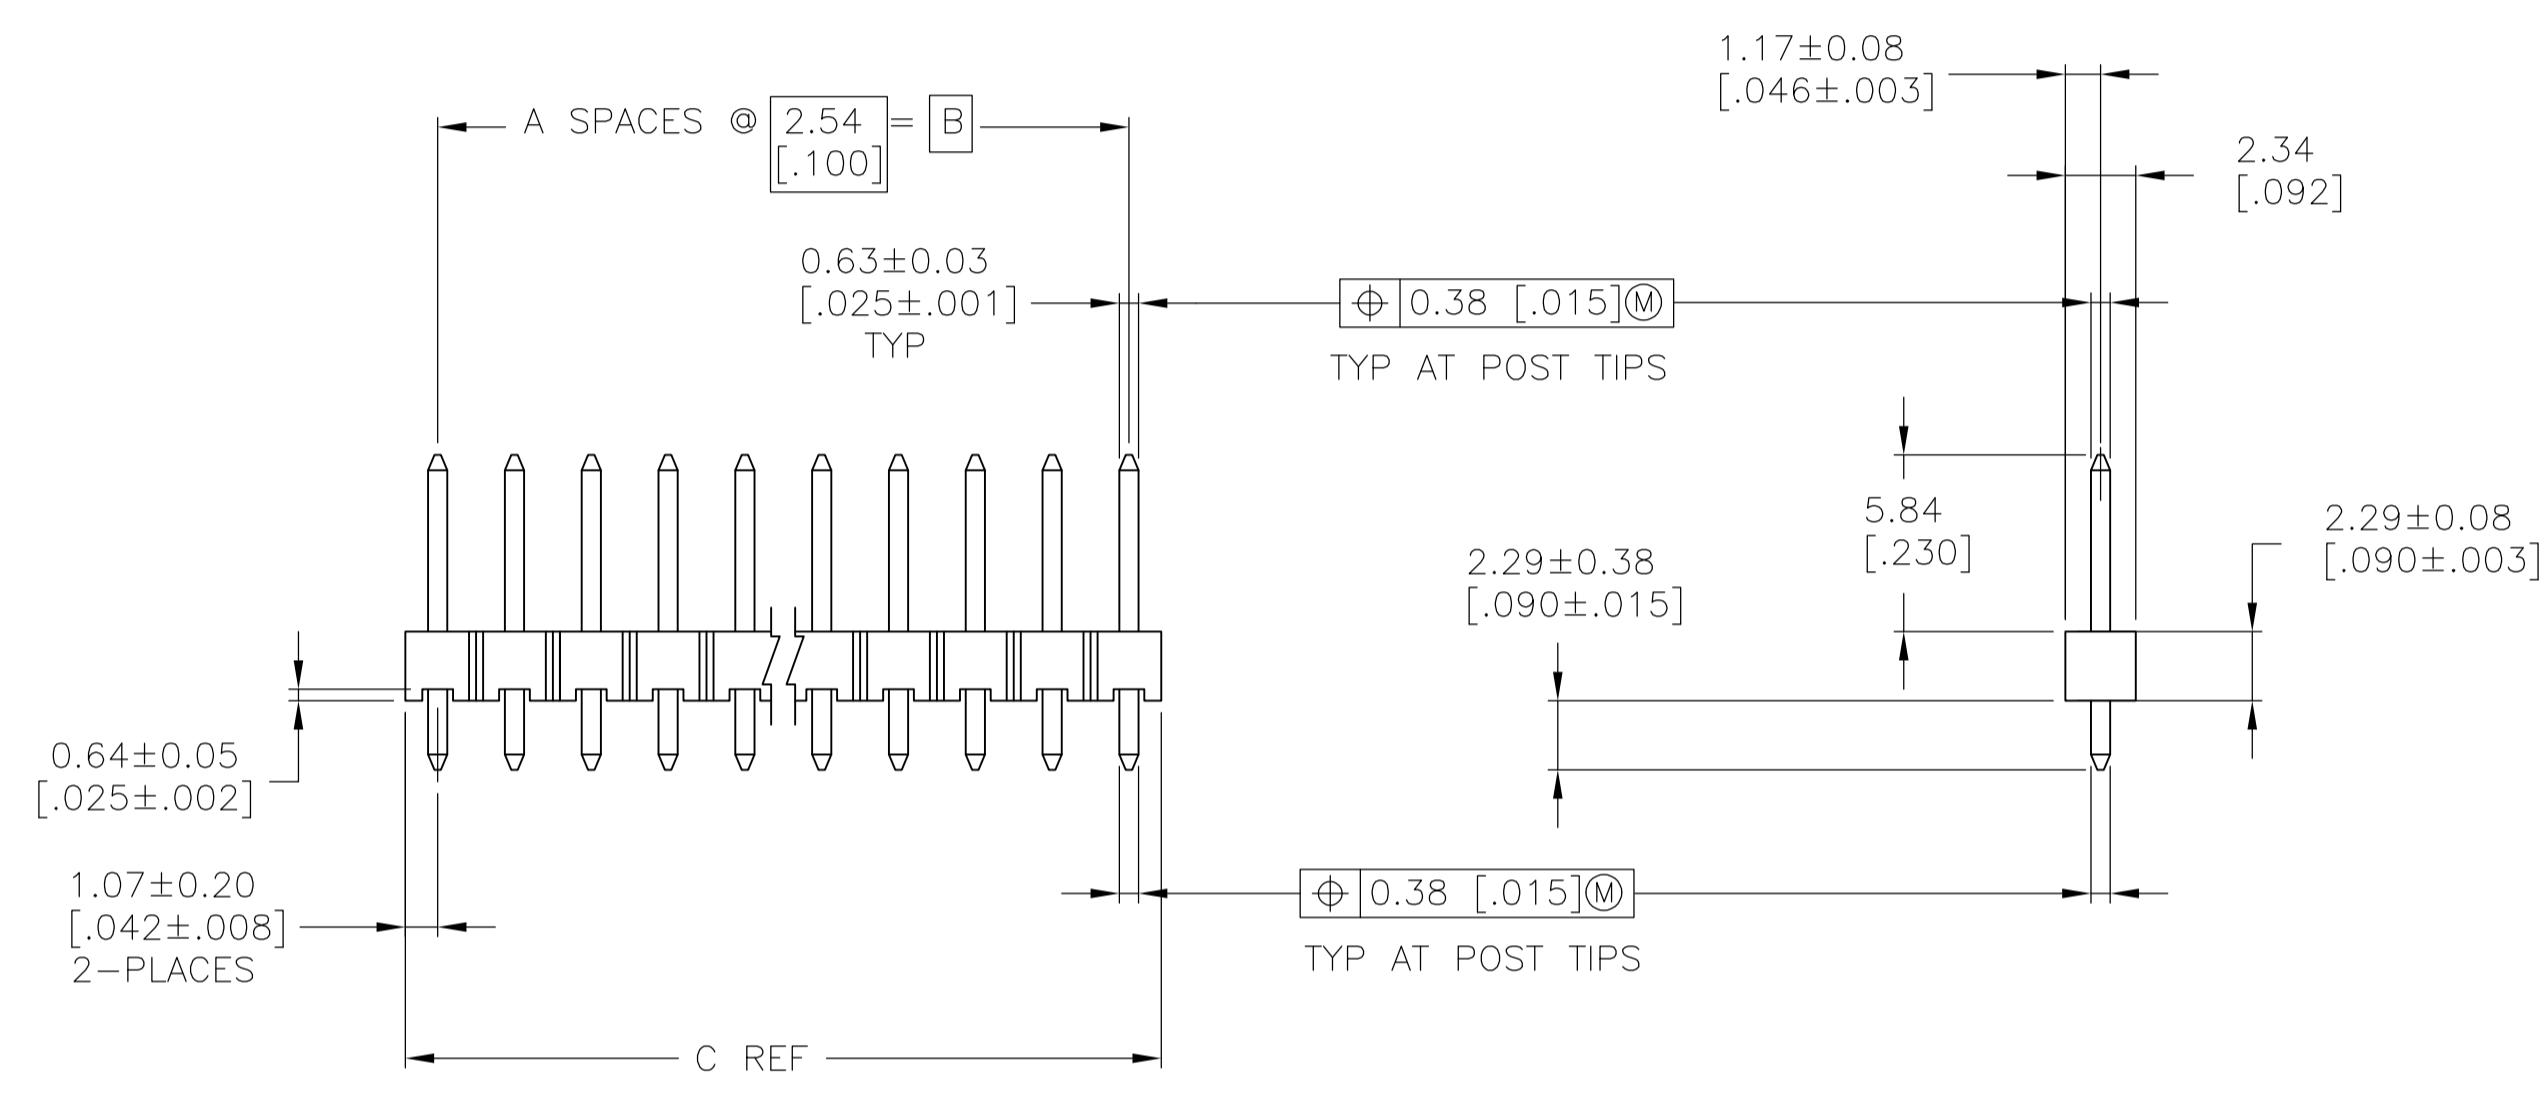

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

PLATING	B	A	NO. OF POSITIONS	PART NUMBER	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
6	7.21	5.08	2	9-146282-1	3	7.21	5.08	2	3	4-146282-1
6	101.19	99.06	39	9-146282-0	3	101.19	99.06	39	40	4-146282-0
6	98.65	96.52	38	8-146282-9	3	98.65	96.52	38	39	3-146282-9
6	96.11	93.98	37	8-146282-8	3	96.11	93.98	37	38	3-146282-8
6	93.57	91.44	36	8-146282-7	3	93.57	91.44	36	37	3-146282-7
6	91.03	88.90	35	8-146282-6	3	91.03	88.90	35	36	3-146282-6
6	88.49	86.36	34	8-146282-5	3	88.49	86.36	34	35	3-146282-5
6	85.95	83.82	33	8-146282-4	3	85.95	83.82	33	34	3-146282-4
6	83.41	81.28	32	8-146282-3	3	83.41	81.28	32	33	3-146282-3
6	80.87	78.74	31	8-146282-2	3	80.87	78.74	31	32	3-146282-2
6	78.33	76.20	30	8-146282-1	3	78.33	76.20	30	31	3-146282-1
6	75.79	73.66	29	8-146282-0	3	75.79	73.66	29	30	3-146282-0
6	73.25	71.12	28	7-146282-9	3	73.25	71.12	28	29	2-146282-9
6	70.71	68.58	27	7-146282-8	3	70.71	68.58	27	28	2-146282-8
6	68.17	66.04	26	7-146282-7	3	68.17	66.04	26	27	2-146282-7
6	65.63	63.5	25	7-146282-6	3	65.63	63.5	25	26	2-146282-6
6	63.09	60.96	24	7-146282-5	3	63.09	60.96	24	25	2-146282-5
6	60.55	58.42	23	7-146282-4	3	60.55	58.42	23	24	2-146282-4
6	58.01	55.88	22	7-146282-3	3	58.01	55.88	22	23	2-146282-3
6	55.47	53.34	21	7-146282-2	3	55.47	53.34	21	22	2-146282-2
6	52.93	50.80	20	7-146282-1	3	52.93	50.80	20	21	2-146282-1
6	50.39	48.26	19	7-146282-0	3	50.39	48.26	19	20	2-146282-0
6	47.85	45.72	18	6-146282-9	3	47.85	45.72	18	19	1-146282-9
6	45.31	43.18	17	6-146282-8	3	45.31	43.18	17	18	1-146282-8
6	42.77	40.64	16	6-146282-7	3	42.77	40.64	16	17	1-146282-7
6	40.23	38.10	15	6-146282-6	3	40.23	38.10	15	16	1-146282-6
6	37.69	35.56	14	6-146282-5	3	37.69	35.56	14	15	1-146282-5
6	35.15	33.02	13	6-146282-4	3	35.15	33.02	13	14	1-146282-4
6	32.61	30.48	12	6-146282-3	3	32.61	30.48	12	13	1-146282-3
6	30.07	27.94	11	6-146282-2	3	30.07	27.94	11	12	1-146282-2
6	27.53	25.40	10	6-146282-1	3	27.53	25.40	10	11	1-146282-1
6	24.99	22.86	9	6-146282-0	3	24.99	22.86	9	10	1-146282-0
6	22.45	20.32	8	5-146282-9	3	22.45	20.32	8	9	146282-9
6	19.91	17.78	7	5-146282-8	3	19.91	17.78	7	8	146282-8
6	17.37	15.24	6	5-146282-7	3	17.37	15.24	6	7	146282-7
6	14.83	12.70	5	5-146282-6	3	14.83	12.70	5	6	146282-6
6	12.29	10.16	4	5-146282-5	3	12.29	10.16	4	5	146282-5
6	9.75	7.62	3	5-146282-4	3	9.75	7.62	3	4	146282-4
6	7.21	5.08	2	5-146282-3	3	7.21	5.08	2	3	146282-3
6	4.67	2.54	1	5-146282-2	3	4.67	2.54	1	2	146282-2
6	2.13	[-]	0	5-146282-1	3	2.13	[-]	0	1	146282-1

OBSOLETE

SUP BY 5-146282-9
SUP BY 5-146282-8
SUP BY 5-146282-7
SUP BY 5-146282-6
SUP BY 5-146282-5
SUP BY 5-146282-4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± -	2 PLC ± 0.51[0.02]	3 PLC ± 0.12[0.005]	4 PLC ± 0.012[0.0005]
-------------------------	--	-----------	-----------	--------------------	---------------------	-----------------------

MATERIAL: 5

FINISH: SEE TABLE

APPROVED: T. HOFFMAN 12 JUN 95, G. DUBNICZKI 29 JUN 95

PRODUCT SPEC: HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, HIGH TEMPERATURE, VERTICAL W/.025 SQ. POSTS, .100CL

SIZE: A1, WEIGHT: -

CUSTOMER DRAWING: 00779C=146282, SCALE: 4:1, SHEET 1 OF 1, REV J2

STE TE Connectivity