

**SPECIFICATIONS**

**Mechanical**

**Mating Force:** 8.50kg (18.74Lb) max.  
**Umating Force:** 0.53kg (1.17Lb) min.  
**Durability:** 500 Cycles

**Electrical**


**Current Rating:** 2A  
**Contact Resistance:** 35mΩ  
**Dielectric Withstanding Voltage:** 1000V AC/1min min.  
**Insulation Resistance:** 5000MΩ min.

**Physical**


**Housing:** Thermoplastic, UL 94V-0 rated in Burgundy 235C Color  
**Contact:** Copper alloy  
**Plating:** See "ORDERING INFORMATION"  
**Operating Temperature:** -55°C to +105°C

**D-SUB Connector**

**DM Series**  
**Right Angle Type, T/H**  
**2.77mm [.109"] Pitch**  
**25 Pos.**

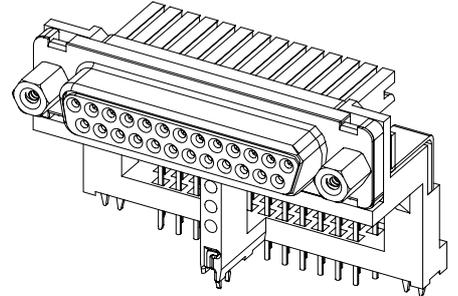

**DRAWING**

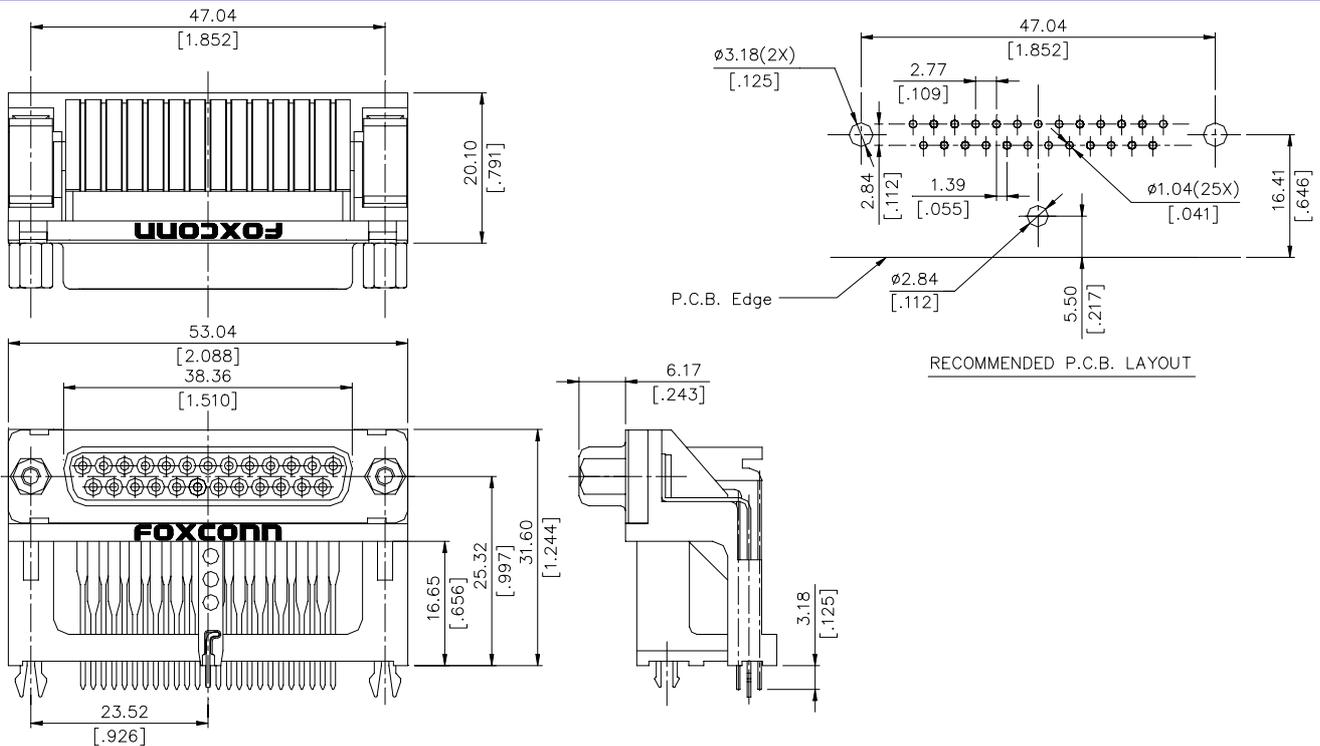

**ORDERING INFORMATION**

**PRODUCT NO.:** DM 1 1 3 5 \* - W34 - 4F

