




MODULAR JACK CONNECTORS

**MCJ-P Series
IDC Panel Jack**


Features

- Meets FCC specifications
- UL and CSA approved E107337 and E145613
- Meets Category 5 Next TSB 40

How to Order

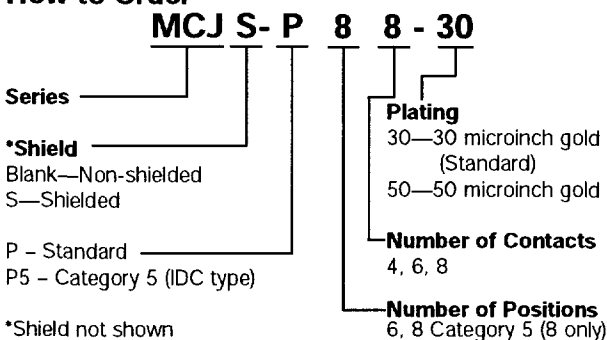

Dimensions — 6 Postion 4 Contact

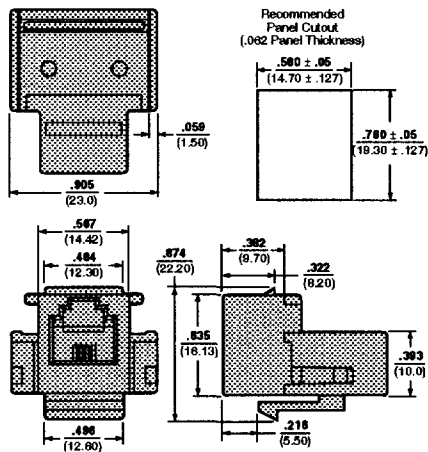

MAXCONN A MEMBER OF THE ERNI GROUP

Performance Specifications

Materials and Finish

Housing: Glass filled polyester, UL 94V-0 rated, black
Contacts: 0.35mm Phosphor bronze, gold plated


Mechanical Characteristics

Durability: 1000 mating cycles
Contact Engagement Force: 1.60 ounces, maximum


Electrical Characteristics

Current/Voltage: 150 Vac at 1.5 amps maximum at 25°C
Dielectric Withstanding Voltage: 1000 Vac RMS minimum, 60 Hz
Insulation Resistance: 500 megohms minimum
Operating Temperature: -55° C to +125° C

Dimensions — 8 Postion 6 Contact

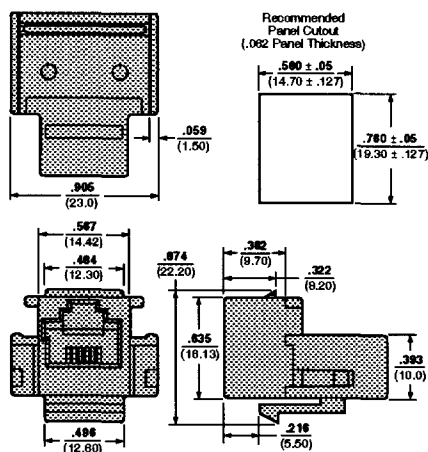

Dimensions — 6 Postion 6 Contact

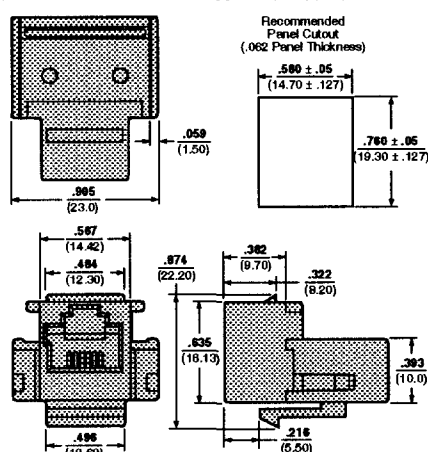

Dimensions — 8 Postion 8 Contact

