
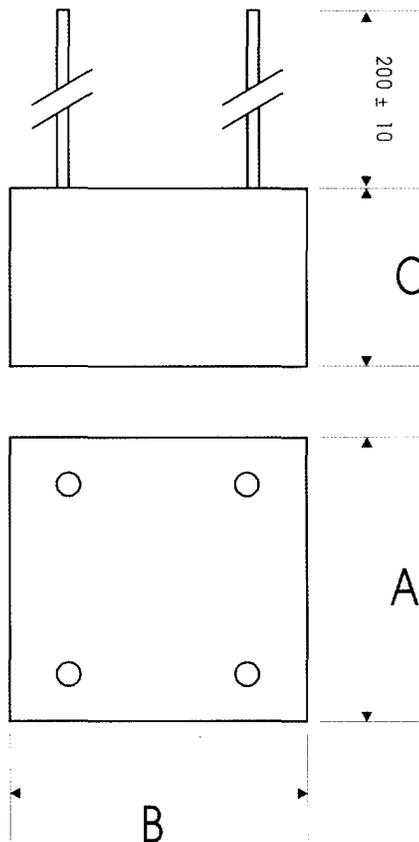


High Current RFI chokes for use in custom designed suppression circuits. Encapsulated for complete environmental and mechanical protection. Ideal for RFI Suppression of Ultrasonic Generators, Motors, Switched Mode Power Supplies e.t.c. Design to specific RFI limits e.g. BS-EN 55014, VDE.



| CHARACTERISTICS | |
|-----------------------------|--------------------------------------|
| Inductance Tolerance : | ± 20% |
| Voltage rating : | 500V RMS |
| Max Operating Temperature : | 45°C (60°C at 25A) |
| Insulation Proof Voltage : | 1.5Kv (1min) Conductor/ Conductor |

Other inductance / current values, case shapes and termination are available

| TYPE | CURRENT | INDUCTANCE | A (mm) | B (mm) | C (mm) |
|------|---------|------------|--------|--------|--------|
| HC1 | 10A | 2mH | 50 | 50 | 30 |
| HC2 | 15A | 1mH | 50 | 50 | 30 |
| HC3 | 25A | 1mH | 50 | 50 | 45 |

Sales Office Tel : (01495) 307070

Fax : (01495) 306965

LCR
Capacitors

