
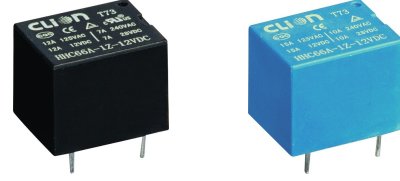


Model and Description

HHC66A(T73) - 7A - 1C - 12VDC

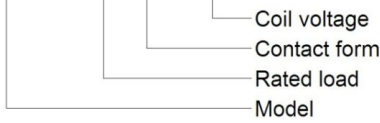


★Contact form: A=NO, B=NC, C=NO&NC

Specification

Dimension		19mm*15.5mm*16mm		
Contact Feature	Form	1A,1B,1C		
	Rated load	5A	7A	10A
	Max switching voltage	240VAC/28VDC		250VAC/28VDC
	Contact resistance	≤100mΩ		
	Material	Silver Alloy		
	Electrical life	≥1*10 ⁵		
	Mechanical life	≥1*10 ⁷		
Operate voltage (23℃)		DC:≤75%*Rated voltage /		
Release voltage (23℃)		DC:≥10%*Rated voltage /		
Maximum voltage (23℃)		110%*Rated voltage		
Coil voltage	DC	DC3-48V(Customize allowed)		
	AC	/		
Coil power	DC	0.36W	0.45W	0.54W
	AC	/		
Pick-up time		≤10ms		
Release time		≤5ms		
Dielectric strength	Between Same-pole contacts	750VAC/1min(leakage current 1mA)		
	Between Opposite-pole contacts	/		
	Between contacts and coil	1500VAC/1min(leakage current 1mA)		
Insulation resistance		≥100mΩ(500VDC)		
Ambient temperature		-55℃ ~ 70℃		
Ambient humidity		35%-80%RH		
Atmospheric pressure		86-106KPa		
Shock resistance		10G (sinusoidal half-wave pulse: 11ms)		
Vibration resistance		10-55Hz (double amplitude: 1.5mm)		
Installation		PCB		
Packing	Inner box	Plastic pipe	25PCS	
		Foam box	100PCS	
	Outer box	Plastic pipe	2000PCS/CTN	
		Foam box	1000PCS/CTN	
	Dimension of the carton	2000PCS/CTN	420mm*235mm*230mm	
		1000PCS/CTN	295mm*205mm*300mm	
Weight	1PCS	Approximate 10g		
	2000PCS/CTN	G.W:21Kg N.W:20Kg		
	1000PCS/CTN	G.W:10.5Kg N.W:10Kg		

Wiring Diagram & Bottom View

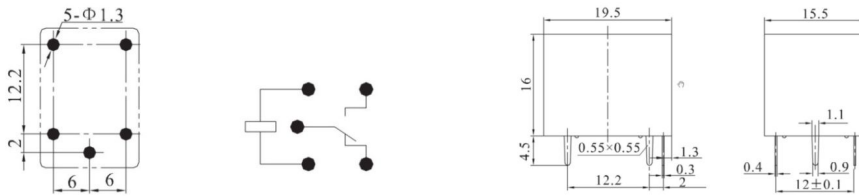

Performance Graph

