


RECOMMENDED P.C.B. LAYOUT

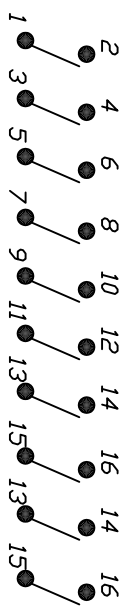

CIRCUIT 12 POS

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT RATINGS: 25mA @24VDC.
 5. CONTACT MATERIAL: Copper Alloy w/
gold plate over Nickel Plate.
 6. PACKAGED: IN DISPENSING TUBE.
 7. TRAVEL: 1.00mm (Actuator)
 8. ▲DENOTES CRITICAL PARAMETER.

A		13167	RELEASED FOR PRODUCTION	5/28/03	AR	TITLE		KAN1110RT	
REV.		ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG
						3:1	5/28/03	AR	N111203
<p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</p>									