


LUR680 thru LUR6100

Glass Passivated Junction Ultra Fast Rectifiers
Reverse Voltage 800 to 1000V Forward Current 6.0A

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * High temperature metallurgically bonded construction
- * Glass passivated junction
- * Capable of meeting environmental standards of MIL-S-19500
- * For use in high frequency rectifier circuits
- * Fast switching for high efficiency
- * High temperature soldering guaranteed: 260°C/10 seconds
- * 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

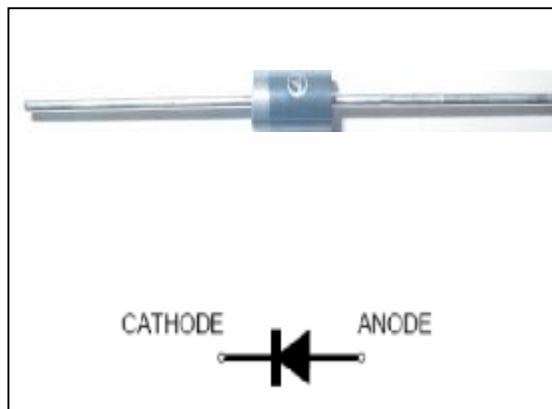

We declare that the material of product compliance with ROHS requirements

Mechanical Data

Case: JEDEC R-6, molded plastic over glass passivated die

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.038 oz., 1.03 g

Handling Precaution: None

1. Maximum & Thermal Characteristics Ratings

at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	LUR680	LUR6100	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	800	1000	V
Maximum RMS voltage	V_{RMS}	560	700	V
Maximum DC blocking voltage	V_{DC}	800	1000	V
Maximum average forward rectified current 0.375" (9.5mm) lead length	IF(AV)	6.0		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	165		A
Maximum full load reverse current, full cycle average, 0.375" (9.5mm) lead lengths at $T_A = 75^\circ C$	IR(AV)	100		μA
Typical thermal resistance (Note 2)	$R_{\theta JA}$	20		$^\circ C/W$
Operating junction and storage temperature range	TJ, TSTG	-65 to +150		$^\circ C$

Electrical Characteristics Ratings

at 25°C ambient temperature unless otherwise specified.

Parameter Symbol	symbol	LUR680	LUR6100	Unit
Maximum Instantaneous Forward Voltage (IF = 6.0 Amps, TJ = 25°C)	V_F	1.85		V
Maximum full load reverse current, full cycle average, 0.375" (9.5mm) lead lengths (Rated dc Voltage, TJ = 150°C) (Rated dc Voltage, TJ = 25°C)	IR	200 5.0		μA
Typical reverse recovery time (Note 1)	trr	75		ns
Typical junction capacitance at 4.0V, 1MHz	CJ	45		PF

NOTES:

1. IF = 0.5A, IR = 1.0A, IRR = 0.25A

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

LUR680 thru LUR6100

2.Ratings and Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

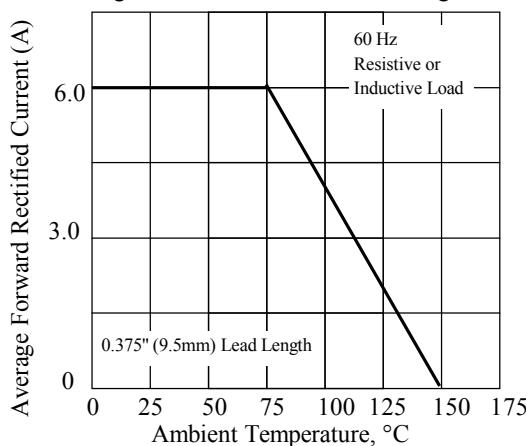


Fig. 3. - Typical Instantaneous Forward Characteristics

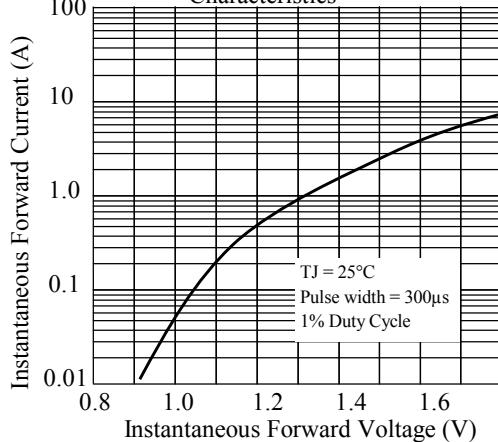


Fig 5. - typical transient thermal impedance

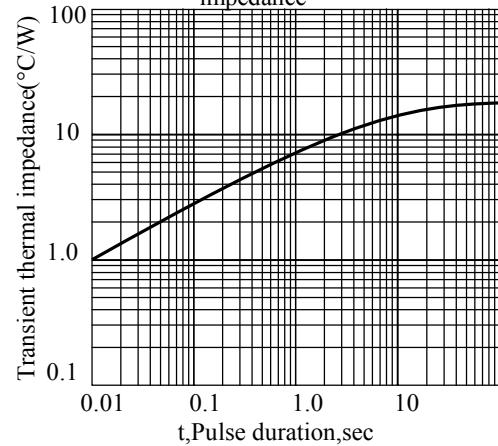


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

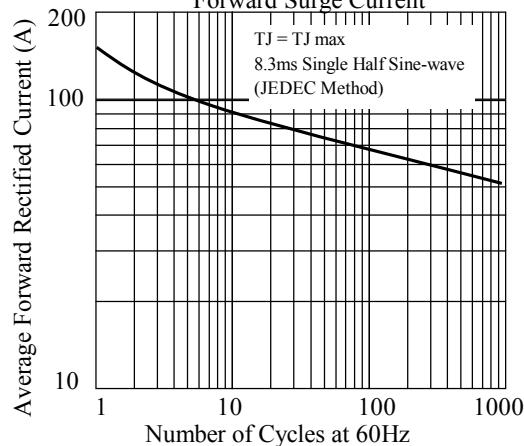


Fig. 4. - Typical Reverse Characteristics


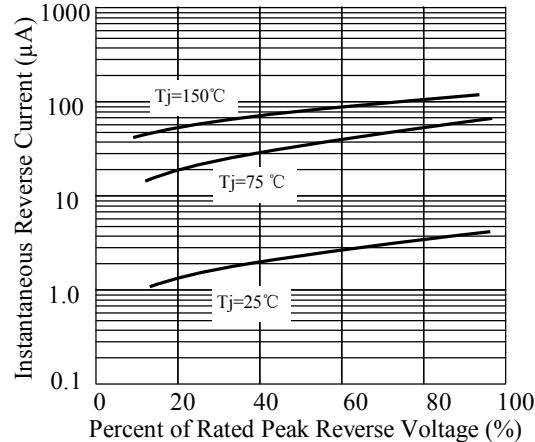



Fig 6. - Typical Junction Capacitance

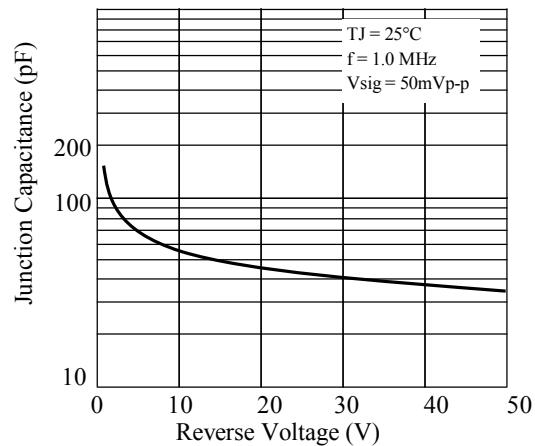

LUR680 thru LUR6100

3. dimension:

Package outline

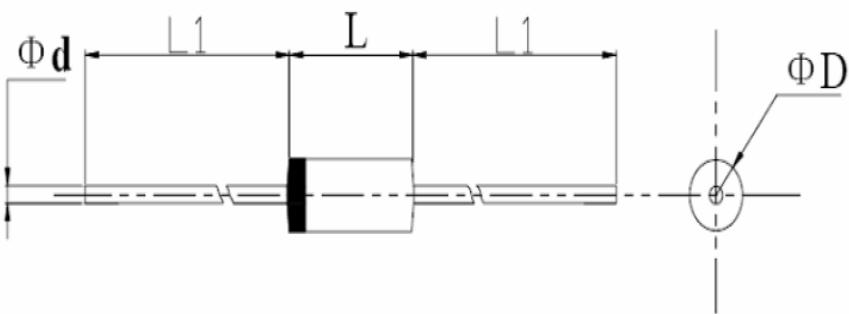


Dimensions				Note: R-6 molded plastic case The marking band indicates the cathode
	inches		mm	
	Min.	Max.	Min.	Max.
L	0.335	0.375	8.5	9.5
L1	1.0	-	25.4	-
ΦD	0.335	0.375	8.5	9.5
Φd	0.048	0.052	1.2	1.3

标题:	文件编号: WI-250
塑封生产线轴向产品包装规范	第 4 版 第 0 次修改
	第 1 页

1 弹带盒装 ammo and box


1.1. 弹带盒规格 ammo spec.

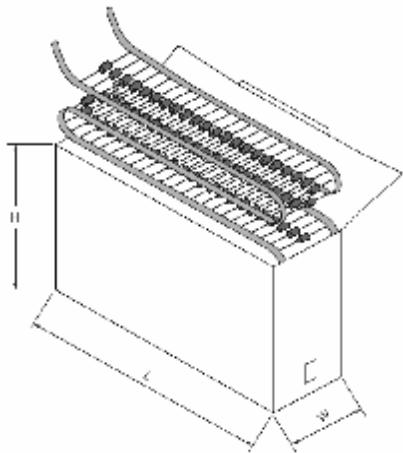

单位: mm

	L	W	H
T52	262±2	76±2	90±2

1.2 弹带内盒要求 inner box spec.

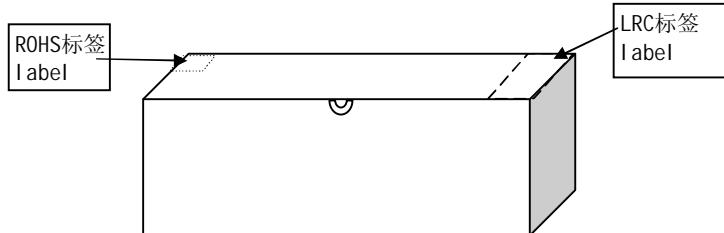

标题:	文件编号: WI -250
塑封生产线轴向产品包装规范	第 4 版 第 0 次修改
	第 2 页

1.4 标签要求 label spec.

1.4.1 LRC标签 LRC label

成 型 ***** ← 成型规格 forming spec.
FORMING


型 号 ***** ← LRC产品型号 type
TYPE

重复峰压 (V) PRV (V)	****	产品重复峰压值 peak repetitive voltage
额定电流 (A) I _o (A)	**	产品额定电流值 average output current
数量 (只) Q'TY (pcs)	****	产品数量 quantity
检验员 CHECKER	02	
日期: DATE:	*****	产品生产日期 date

1.4.2 环保标签 environmental protection label



2.外箱规格 cartoon spec.

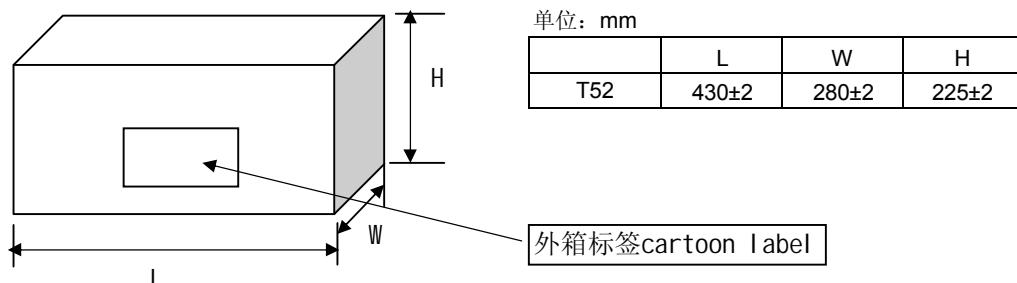


3 按以上包装方式, 编带数量和外包装箱产品数量: typing and cartoon spec.

	塑封外型
	R-6
每根编带数量 quantity/ammo	0.4K
外箱数量 (T52编带) quantity/cartoon	4.0K

标题: 塑封生产线轴向产品包装规范	文件编号: WI-250 第 4 版 第 0 次修改 第 3 页
----------------------	--

4 编带规格 brede spec

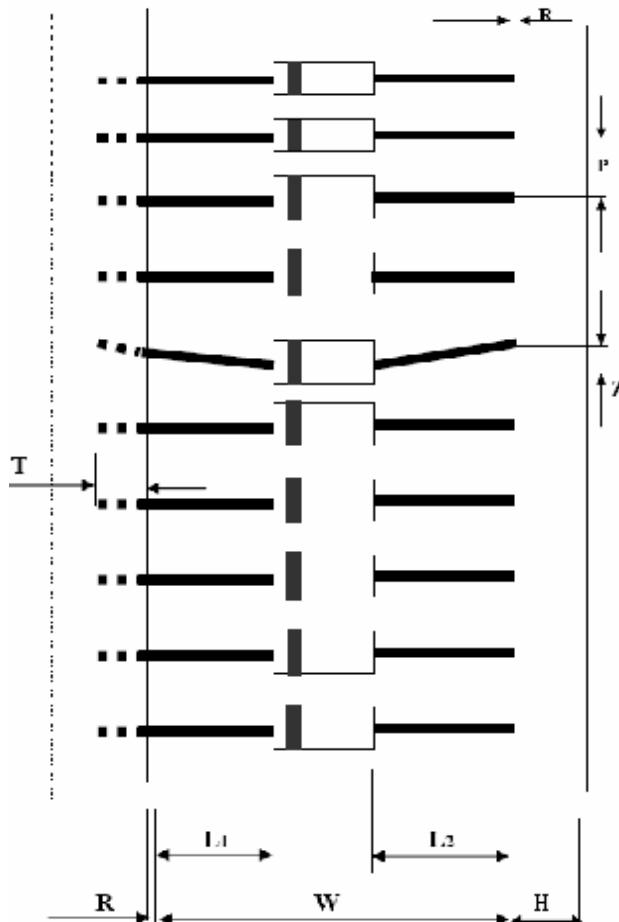

尺寸代号	编带尺寸 typing dimension
	52/tape#
W	52 -1.0/+2.0
P	20±0.5
L1-L2	<1.2
H	6±1.0
Z	<1.0
R	<1.0
T	>3.5

1. 红白编带厚度为0.05mm；两种胶带各自之间无明显色差；编带要求均为胶带。
The typing thickness is 0.05mm and color is obvious difference
2. 两端引带20~40cm. Typing lead over 20~40cm
3. 红色编带一端为二极管“负极”；白色编带一端为二极管“正极”。
red color is cathode ,white color is anode
4. 无卤 green epoxy compound (无卤产品才贴HF only)

Green



乐山无线电股份有限公司
Leshan Radio Company, Ltd

LUR680 thru LUR6100

4、版式次更新记录

版次	更新记录	更新作者	更新日期
1	第一版	周杰	2011-10-10