

# MM5Z2V2B~MM5Z39B

## SILICON PLANAR ZENER DIODES

### FEATURES


- Total power dissipation: max. 200 mW
- Small plastic package suitable for surface mounted design
- High reliability

### DESCRIPTION

Silicon planar Zener diode in a small plastic SMD SOD-523 package

### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

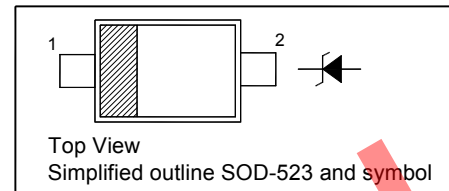


### Absolute Maximum Ratings ( $T_a = 25\text{ }^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Power Dissipation	$P_{tot}$	200	mW
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	- 55 to + 150	$^\circ\text{C}$

### Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Max.	Unit
Thermal Resistance Junction to Ambient Air	$R_{thA}$	635	$^\circ\text{C/W}$
Forward Voltage at $I_F = 10\text{ mA}$	$V_F$	0.9	V



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 02/09/2008


# MM5Z2V2B~MM5Z39B

## Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Type	Marking Code	Zener Voltage Range <sup>1)</sup>			Dynamic Impedance <sup>2)</sup>		Reverse Leakage Current	
		$V_{znom}$ V	$I_{ZT}$ mA	for $V_{ZT}$ V	$Z_{ZT}$ (Max.) $\Omega$	at $I_{ZT}$ mA	$I_R$ (Max.) $\mu\text{A}$	at $V_R$ V
MM5Z2V2B	RM	2.2	5	2.1...2.4	100	5	120	0.7
MM5Z2V4B	RN	2.4	5	2.3...2.65	100	5	120	1
MM5Z2V7B	RP	2.7	5	2.65...2.95	110	5	120	1
MM5Z3V0B	RR	3.0	5	2.95...3.25	120	5	50	1
MM5Z3V3B	RX	3.3	5	3.25...3.55	120	5	20	1
MM5Z3V6B	RY	3.6	5	3.6...3.845	100	5	10	1
MM5Z3V9B	JY	3.9	5	3.89...4.16	100	5	5	1
MM5Z4V3B	JZ	4.3	5	4.17...4.43	100	5	5	1
MM5Z4V7B	KA	4.7	5	4.55...4.75	100	5	2	1
MM5Z5V1B	KB	5.1	5	4.98...5.2	80	5	2	1.5
MM5Z5V6B	KC	5.6	5	5.49...5.73	60	5	1	2.5
MM5Z6V2B	KD	6.2	5	6.06...6.33	60	5	1	3
MM5Z6V8B	KE	6.8	5	6.65...6.93	40	5	0.5	3.5
MM5Z7V5B	KF	7.5	5	7.28...7.6	30	5	0.5	4
MM5Z8V2B	KH	8.2	5	8.02...8.36	30	5	0.5	5
MM5Z9V1B	KJ	9.1	5	8.85...9.23	30	5	0.5	6
MM5Z10B	KK	10	5	9.77...10.21	30	5	0.1	7
MM5Z11B	KM	11	5	10.76...11.22	30	5	0.1	8
MM5Z12B	KN	12	5	11.74...12.24	30	5	0.1	9
MM5Z13B	KP	13	5	12.91...13.49	37	5	0.1	10
MM5Z15B	KR	15	5	14.34...14.98	42	5	0.1	11
MM5Z16B	KX	16	5	15.85...16.51	50	5	0.1	12
MM5Z18B	KY	18	5	17.56...18.35	65	5	0.1	13
MM5Z20B	KZ	20	5	19.52...20.39	85	5	0.1	15
MM5Z22B	RZ	22	5	21.54...22.47	100	5	0.1	17
MM5Z24B	XA	24	5	23.72...24.78	120	5	0.1	19
MM5Z27B	XB	27	5	26.19...27.53	150	5	0.1	21
MM5Z30B	XC	30	5	29.19...30.69	200	5	0.1	23
MM5Z33B	XD	33	5	32.15...33.79	250	5	0.1	25
MM5Z36B	XE	36	5	35.07...36.87	300	5	0.1	27
MM5Z39B	XF	39	5	37...41	100	5	2	30

<sup>1)</sup>  $V_Z$  is tested with pulses (20 ms).

<sup>2)</sup>  $Z_{ZT}$  is measured at  $I_Z$  by given a very small A.C. current signal.



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited





Dated : 02/09/2008

# MM5Z2V2B~MM5Z39B

## PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-523

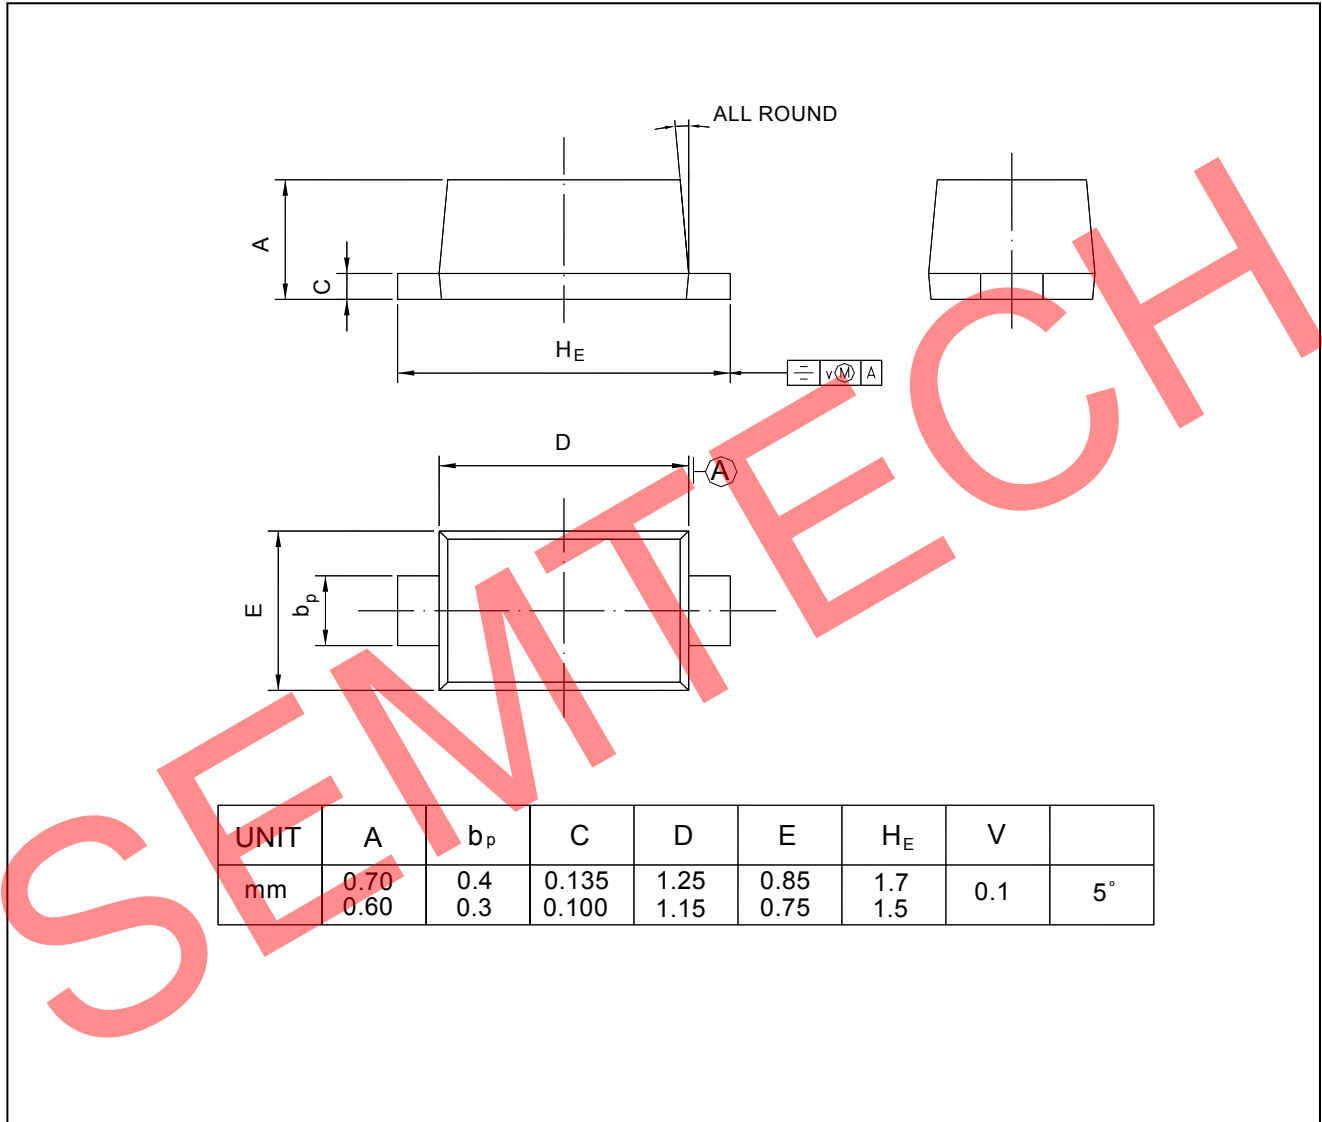

**SEMTECH ELECTRONICS LTD.**  
 Subsidiary of Sino-Tech International (BVI) Limited



Dated : 02/09/2008