


## 2.0A Sintered Glass Passivated Super Fast Rectifier

### Features

- Sintered glass passivated (SGP) rectifier chip
- Glass passivated cavity-free junction
- Ideal for surface mount automotive applications
- Built-in strain relief
- Easy pick and place
- High temperature soldering guaranteed: 250°C/10 seconds, at terminals
- RoHS Compliance



SMB



### Mechanical Data

<b>Case:</b>	JEDEC DO-214AA(SMB) molded plastic over passivated chip
<b>Epoxy:</b>	Plastic package has UL flammability classification 94V-0
<b>Terminals:</b>	Solder plated, solderable per MIL-STD-750, Method 2026
<b>Polarity:</b>	Color band denotes cathode end
<b>Weight:</b>	0.003 ounce, 0.093 gram

### Maximum Ratings and Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless noted otherwise)

Symbol	Description	EGF2A	EGF2B	EGF2D	EGF2G	EGF2J	EGF2K	Unit	Conditions
<b>V<sub>RRM</sub></b>	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	V	
<b>V<sub>RMS</sub></b>	Maximum RMS Voltage	35	70	140	280	420	560	V	
<b>V<sub>DC</sub></b>	Maximum DC Blocking Voltage	50	100	200	400	600	800	V	
<b>I<sub>F(AV)</sub></b>	Maximum Average Forward Rectified Current	2.0						A	TL=110° C
<b>I<sub>FSM</sub></b>	Peak Forward Surge Current	65				60		A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)

## 2.0A Sintered Glass Passivated Super Fast Rectifier

### EGF2A - EGF2K

Symbol	Description	EGF2A	EGF2B	EGF2D	EGF2G	EGF2J	EGF2K	Unit	Conditions
<b>V<sub>F</sub></b>	Maximum Instantaneous Forward Voltage	0.95			1.25	1.7	2.2	V	I <sub>F</sub> =2.0 A
<b>I<sub>R</sub></b>	Maximum DC Reverse Current at Rated DC Blocking Voltage	5.0						μA	TA=25° C
		100							TA=125° C
<b>T<sub>rr</sub></b>	Maximum Reverse Recovery Time	35						nS	I <sub>F</sub> =0.5A, I <sub>R</sub> =1.0A, I <sub>rr</sub> =0.25A
<b>C<sub>J</sub></b>	Typical Junction Capacitance	25						pF	V <sub>R</sub> =4V, f=1MHz
<b>R<sub>thJA</sub></b>	Typical Thermal Resistance	20						°C / W	Note
<b>T<sub>J</sub>, T<sub>stg</sub></b>	Operating junction and Storage Temperature Range	-55 to +175						°C	

**Note:** Thermal resistance from junction to ambient P.C.B mounted on 0.2x0.2" (5.0x5.0mm) copper pad areas.

### Typical Characteristics Curves

Fig.1- Forward Current Derating Curve


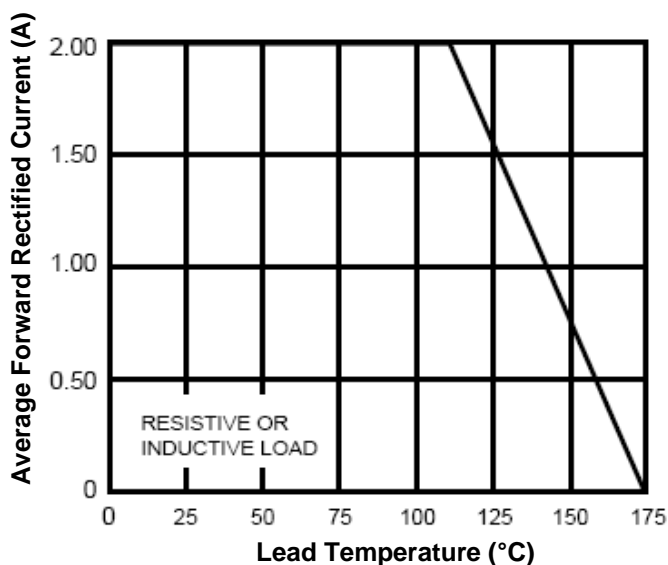


Fig.2- Max. Non-Repetitive Forward Surge Current

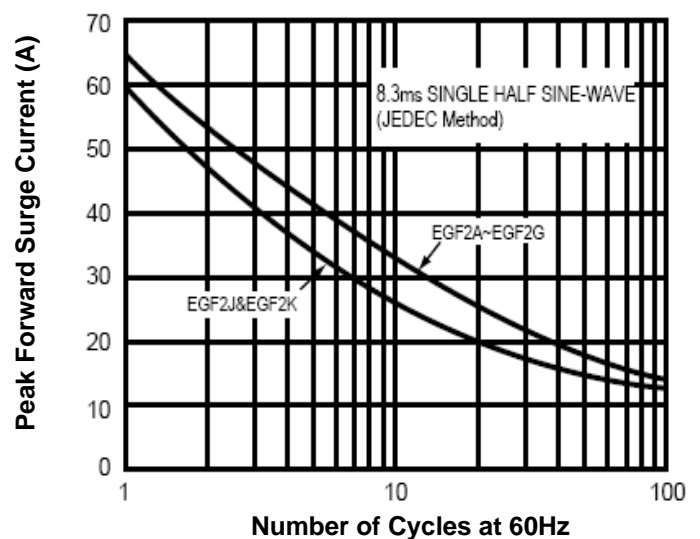

## 2.0A Sintered Glass Passivated Super Fast Rectifier

### EGF2A - EGF2K

Fig.3- Typical Instantaneous Forward Characteristics

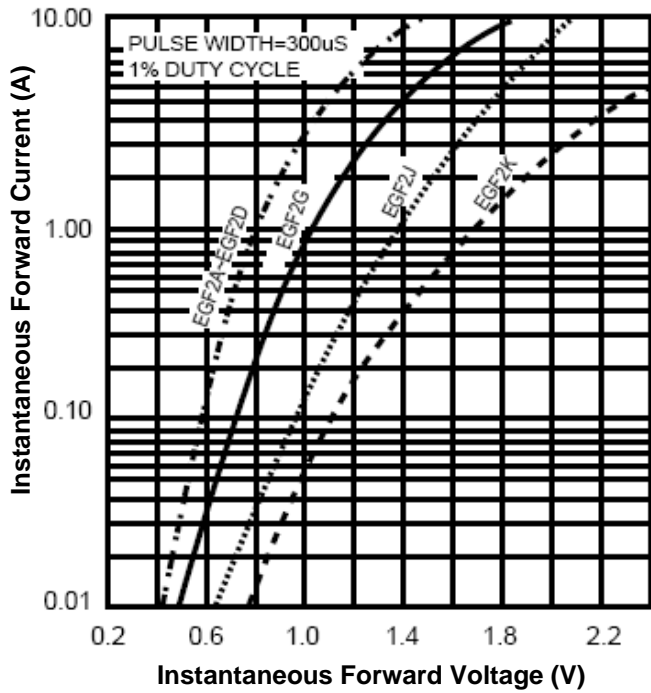


Fig.4-Typical Reverse Characteristics


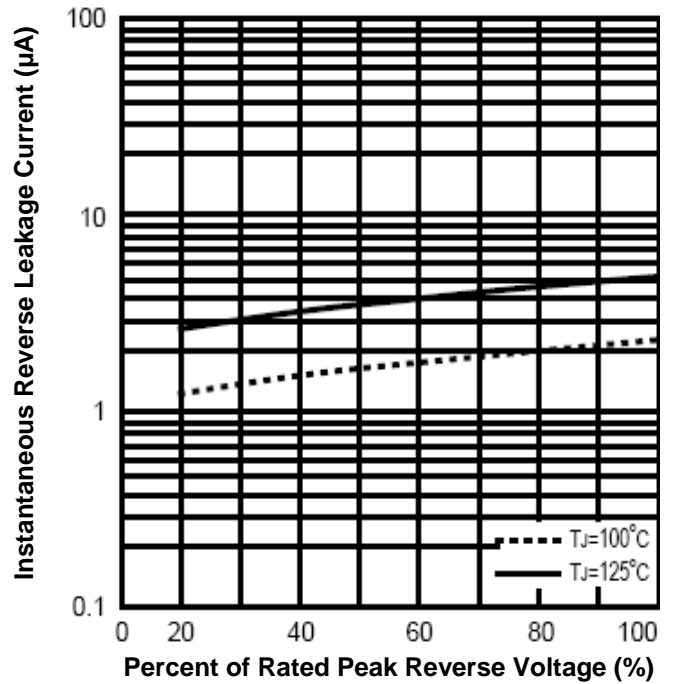



Fig.5- Typical Junction Capacitance

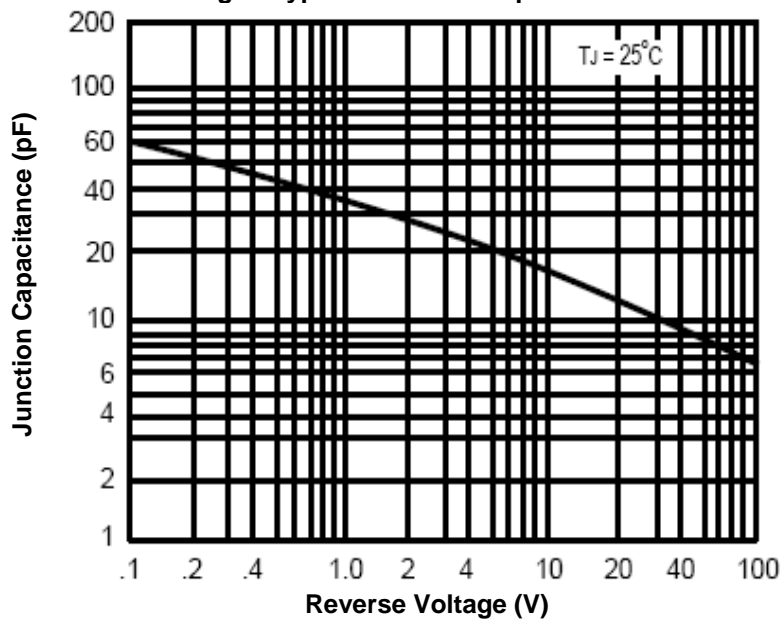

## 2.0A Sintered Glass Passivated Super Fast Rectifier


### EGF2A - EGF2K

#### Dimensions in inch (mm)

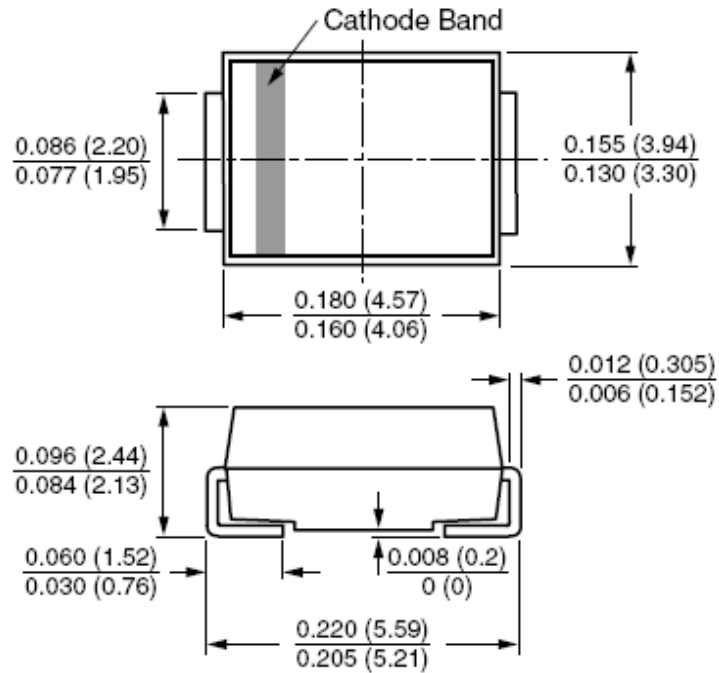

SMB

#### Mounting Pad Layout in inch (mm)

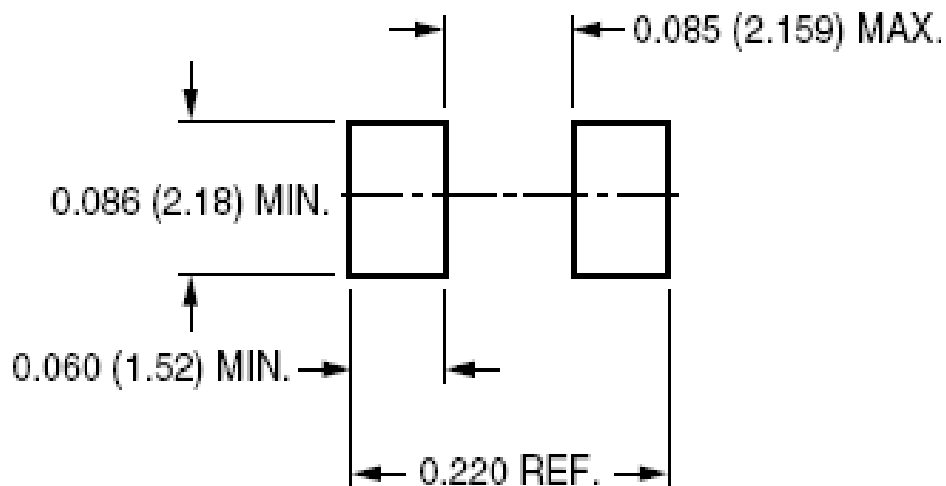

## 2.0A Sintered Glass Passivated Super Fast Rectifier

### EGF2A - EGF2K

#### How to contact us:

##### **US HEADQUARTERS**

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: [taitron@taitroncomponents.com](mailto:taitron@taitroncomponents.com)

Http://[www.taitroncomponents.com](http://www.taitroncomponents.com)

##### **TAITRON COMPONENTS MEXICO, S.A .DE C.V.**

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.  
42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

##### **TAITRON COMPONETS INCORPORATED E REPRESENTAÇÕES DO BRASIL LTDA**

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

##### **TAITRON COMPONETS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE**

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931