
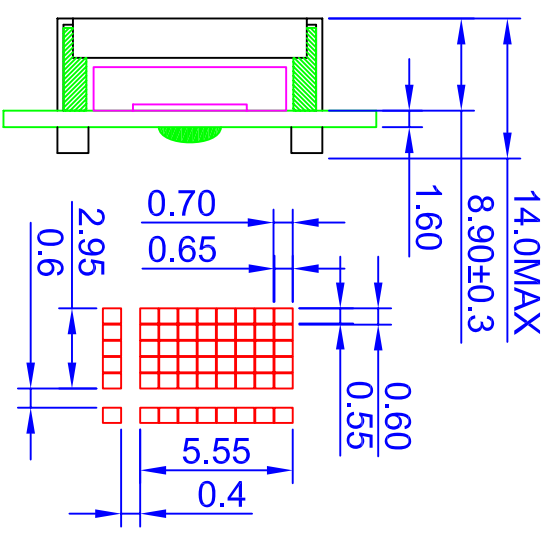


REV.	CHANGE CONTENT	BY	DATE

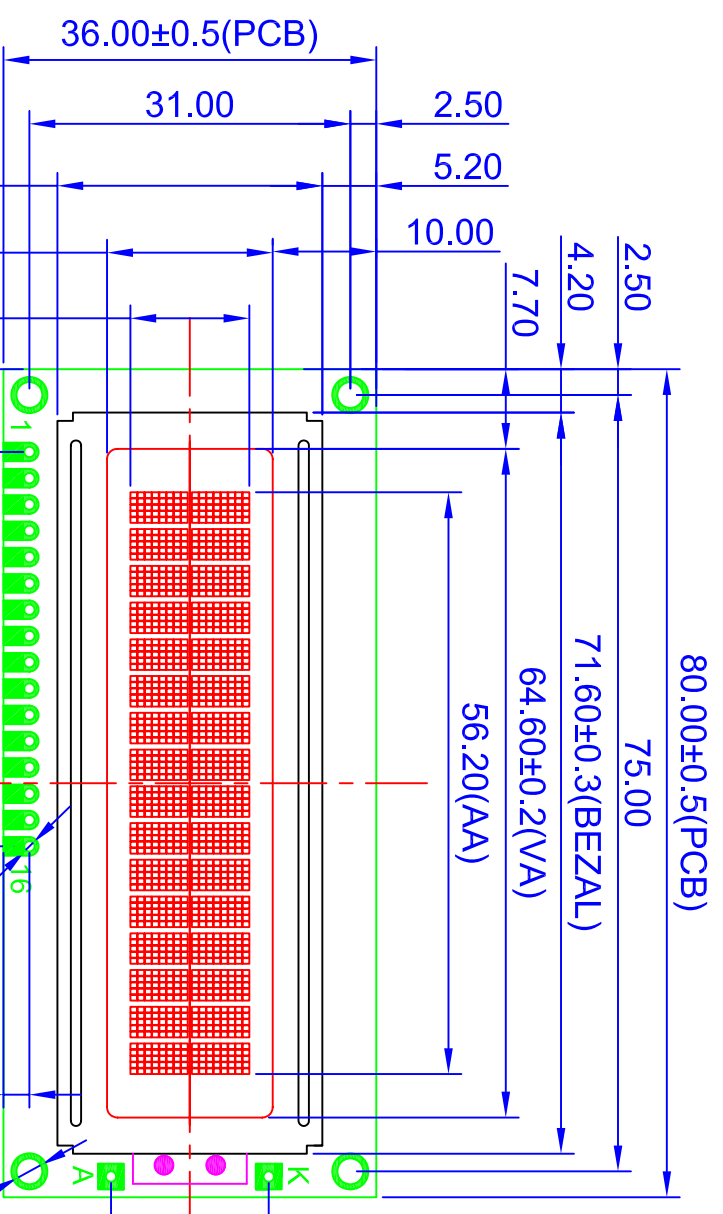

NOTE:

- 1.DISPLAY TYPE : STN, GREY, POSITIVE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE
- 4.LCD DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, VOP=4.6V
- 5.OPERATING TEMP.: -20°C~+70°C
- 6.STORAGE TEMP.: -30°C~+80°C
- 7.POWER SUPPLY FOR LOGIC: 5.0V
- 8.LCD CONTROLLER: S6A0069, English Font
- 9.BACKLIGHT: Y/G, 4.2V, 130mA, 26 Dices

NO.	PIN NAME	DESCRIPTION
1	VSS	POWER GROUND
2	VDD	POWER SUPPLY FOR LOGIC
3	V0	POWER SUPPLY FOR LCD
4	RS	Register select. H:Data, L:Instruction
5	R/W	Read/Write Select. H:Read, L:Write
6	E	Read/write enable signal.
7-14	D0-D7	Data bus.
15	LED+	POWER SUPPLY FOR LED+ (+4.2V)
16	LED-	POWER SUPPLY FOR LED- (0V)

HTDISPLAY CO., LTD.

TOLERANCE					
>0~6 ±0.10					
>6~80 ±0.20					
>80~240 ±0.30	DESIGN	JHG	20061113	STANDARD	
>240~400 ±0.50	CHECKED			TECHNOLOGY	
// L ⊗ ±0.10	APPROVED			Q. A	

DRAWING No.: HC160214C-GF62I-VC
 DRAWING TITLE: LCM Drawing
 FILE NO.: 8
 REV.: B
 SCALE: -
 PROJECTION: UNIT: mm
 SHEET: 1/3