

## Features & Benefits


- High capacity model (High charge voltage)
- High energy density and voltage
- Long, stable power with a flat discharge voltage
- Ideal for portable communications, portable computing, and robotics.

## Specifications

Rated capacity <sup>(1)</sup>	Min. 1660mAh
Capacity <sup>(2)</sup>	Min. 1660mAh Typ. 1710mAh
Nominal voltage	3.8V
Charging	CC-CV, Std. 1160mA, 4.35V, 4.0 hrs
Weight (max.)	30.0 g
Temperature	Charge: 0 to +45°C Discharge: -20 to +60°C Storage: -20 to +50°C
Energy density	Volumetric: 496 Wh/l Gravimetric: 210 Wh/kg


<sup>(1)</sup> At 20°C <sup>(2)</sup> At 25°C

## Dimensions

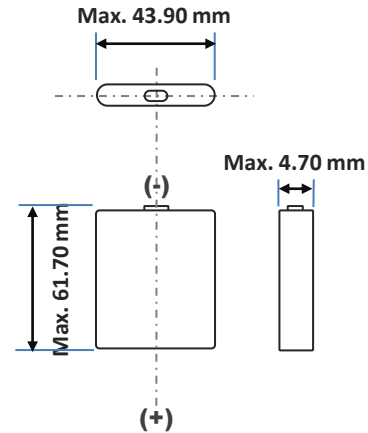


For Reference Only


## Charge Characteristics

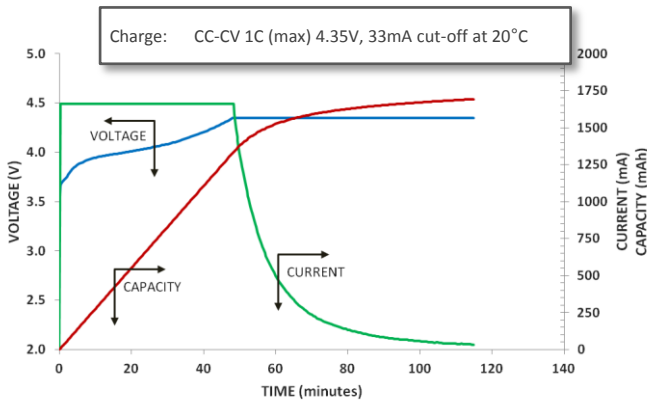


## Cycle Life Characteristics

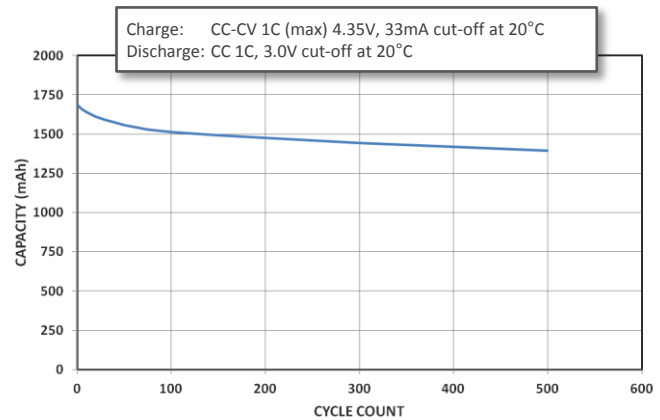

## Discharge Characteristics (by temperature)

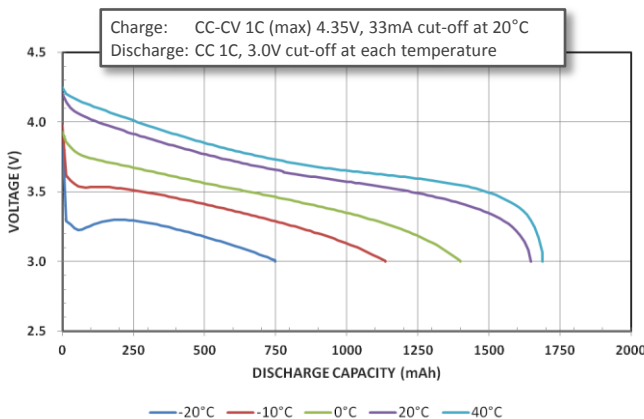

## Discharge Characteristics (by rate of discharge)

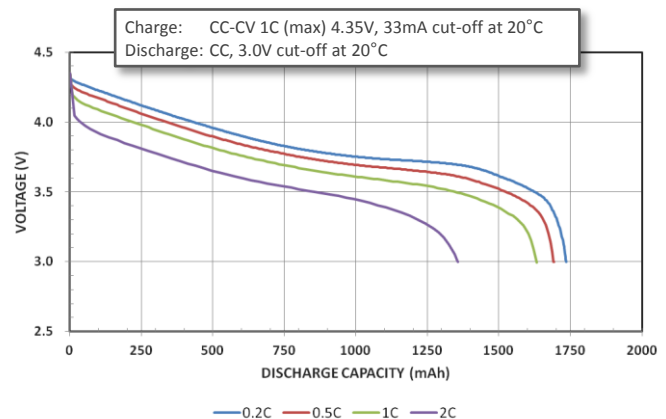

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.