


# Schottky Powermod

## FST6035 – FST6050

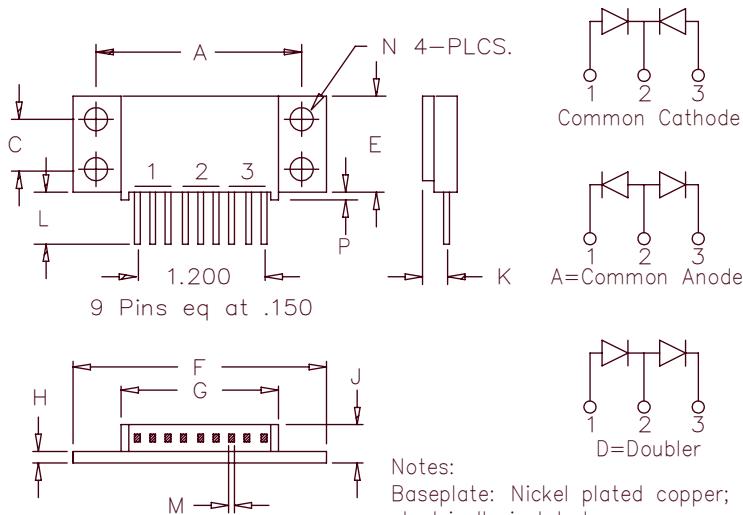

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	1.995	2.005	50.67	50.93	
C	0.495	0.506	12.57	12.83	
E	0.990	1.010	25.15	25.65	
F	2.390	2.410	60.71	61.21	
G	1.490	1.510	37.85	38.35	
H	0.120	0.130	3.05	3.30	
J	---	0.400	---	10.16	
K	0.240	0.260	6.10	6.60 to Lead C	
L	0.490	0.510	12.45	12.95	
M	0.040	.050	1.02	1.27	Square
N	0.175	0.195	4.45	4.95	Dia
P	0.032	0.052	0.81	1.32	

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
FST6035*	35V	35V	35V
FST6040*	40V	40V	40V
FST6045*	45V	45V	45V
FST6050*	50V	50V	50V

\*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- $V_{RRM}$  35 to 50 Volts
- High surge capacity
- Reverse Energy Tested
- ROHS Compliant

### Electrical Characteristics

Average forward current per pkg	$I_F(AV)$ 120 Amps
Average forward current per leg	$I_F(AV)$ 60 Amps
Maximum surge current per leg	$I_{FSM}$ 1200 Amps
Maximum repetitive reverse current per leg	$I_{R(OV)}$ 2 Amps
Max peak forward voltage per leg	$V_{FM}$ 0.56 Volts
Max peak forward voltage per leg	$V_{FM}$ 0.74 Volts
Max peak reverse current per leg	$I_{RM}$ 30 mA
Max peak reverse current per leg	$I_{RM}$ 1.5 mA
Typical junction capacitance per leg	$C_J$ 2300 pF

$T_C = 135^\circ\text{C}$ , square wave, $R_{\theta JC} = 0.6^\circ\text{C}/\text{W}$
$T_C = 135^\circ\text{C}$ , square wave, $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$
8.3ms, half sine, $T_J = 175^\circ\text{C}$
$f = 1 \text{ KHz}, 25^\circ\text{C}, 1 \mu\text{sec square wave}$
$I_{FM} = 60\text{A}: T_J = 175^\circ\text{C}^*$
$I_{FM} = 60\text{A}: T_J = 25^\circ\text{C}^*$
$V_{RRM}, T_J = 125^\circ\text{C}^*$
$V_{RRM}, T_J = 25^\circ\text{C}$
$V_R = 5.0\text{V}, T_C = 25^\circ\text{C}$

\*Pulse test: Pulse width 300 $\mu$ sec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	$T_{STG}$	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Operating junction temp range	$T_J$	$-55^\circ\text{C}$ to $175^\circ\text{C}$
Max thermal resistance per leg	$R_{\theta JC}$	$1.0^\circ\text{C}/\text{W}$ Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	$0.6^\circ\text{C}/\text{W}$ Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	$0.1^\circ\text{C}/\text{W}$ Case to sink
Mounting Torque		15 – 20 inch pounds
Weight		2.5 ounces (71 grams) typical

# FST6035 – FST6050

Figure 1  
Typical Forward Characteristics – Per Leg

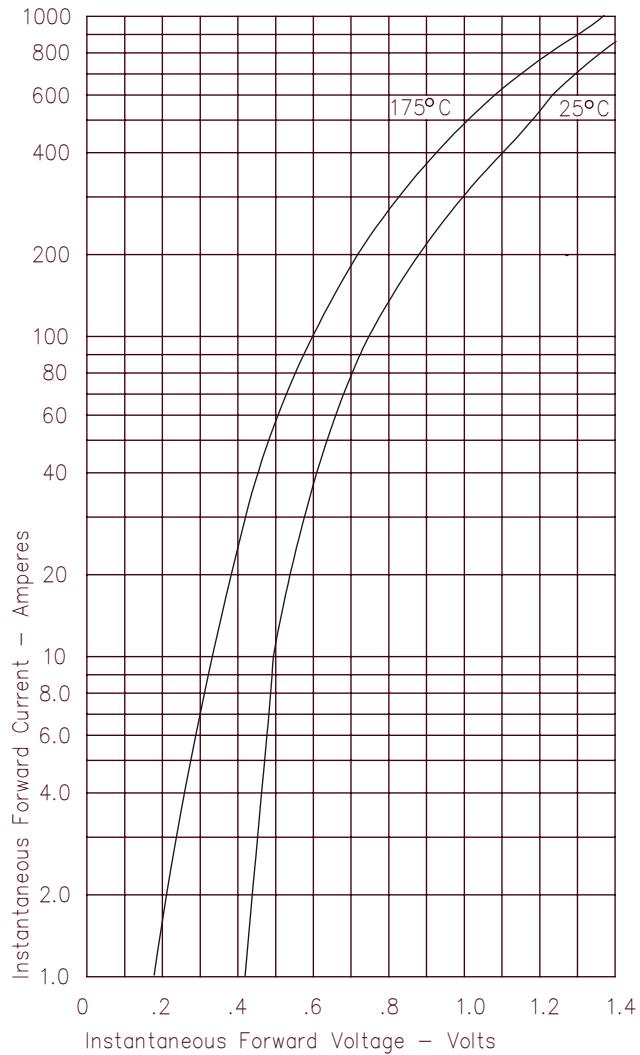


Figure 2  
Typical Reverse Characteristics – Per Leg

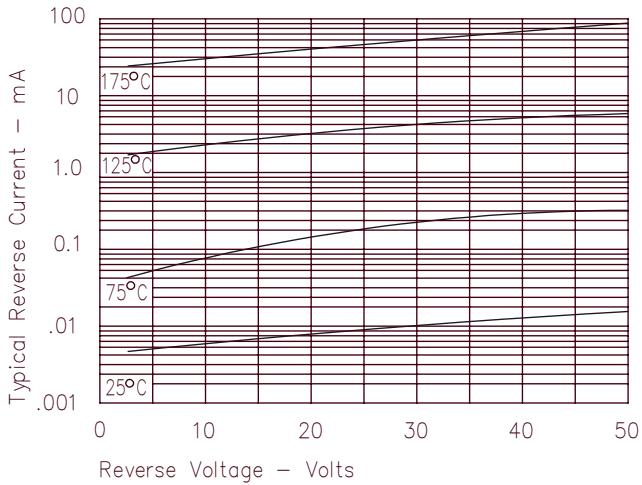


Figure 3  
Typical Junction Capacitance – Per Leg

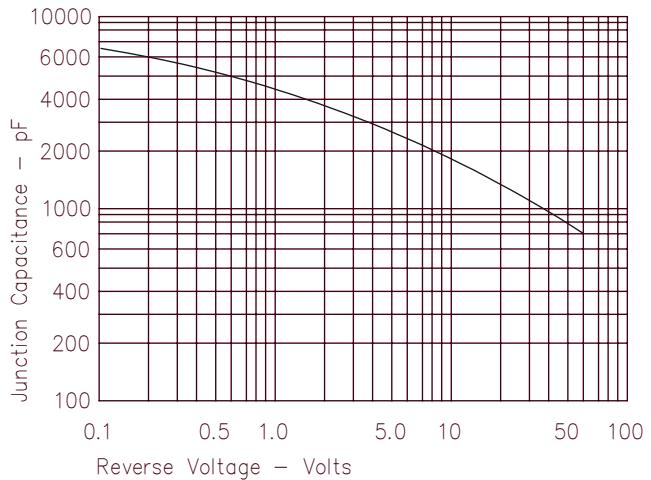


Figure 4  
Forward Current Derating – Per Leg

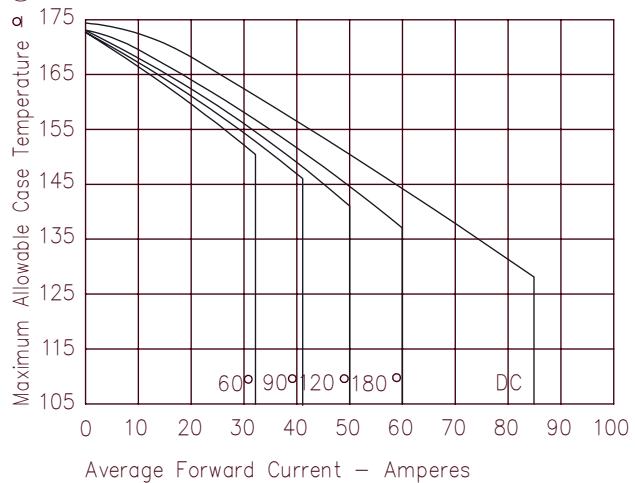


Figure 5  
Maximum Forward Power Dissipation – Per Leg

