

# SC Type Fiber Optic Connectors

SC Type



- ▶ Equivalent to NTT specifications (SCF-2PH)
- ▶ Designed for  $\varnothing$  3.0 mm Cable
- ▶ Recommended adaptor: SCCF-2A1 series
- ▶ Combined with SZ-1A/3A series (ferrule) provides high performance
- ▶ Both rubber and plastic types are available for the hood
- ▶ The plastic hood type corresponds to Telcordia specification GR-326-CORE and satisfies Vertical Burning Test for Classifying Materials UL94V-0 (excluding cap)

## ORDERING INFORMATION

Model Number	Type Number							
SSCF-2P3	5	5	3	1	4	3	0	1

Hood (1, 2) Color	
2	Red
3	White
4	Grey
5	<b>Blue</b>
6	Deep-Green

Hood I.D. (mm)	
3	<b>3.0 mm (synthetic rubber)</b>
7	3.0 mm (plastic)

Marking of Grip	
1	<b>SII / SSCF-2P</b>


(Required)	
0	<b>1</b>

Package	
2	Individual Package
3	<b>Bulk Package</b>

Cap	
0	No Cap
4	<b>Blue PVC</b>

Housing

**SSCF-2P3 Series**  
**Duplex**  
**Designed for**  
 **$\varnothing$  3.0 mm Cable**

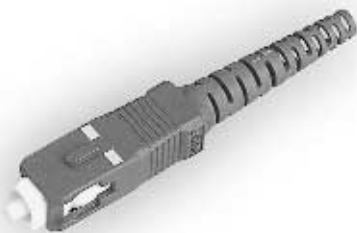

- ▶ One-piece design for easy assembly
- ▶ Pre-dome Zirconia ferrule enables easy polishing
- ▶ Plastic hood according to Telcordia specification GR-326-CORE (excluding  $\varnothing$  0.9 rubber hood type)
- ▶ Satisfies Vertical Burning Test for Classifying Materials UL94V-0 (excluding cap)
- ▶ Recommended adaptor: SSC-A series

## ORDERING INFORMATION

Model Number	Type Number									
SSC-PE	3	7	1	2	5	1	A	3	0	0

Hood Color	
3	<b>White</b>
5	Blue

Hood I.D. (mm)	
1	0.9 mm (flame-resistant rubber)
6	2.0 mm (Plastic)
7	<b>3.0 mm(Plastic)</b>
9	0.9 mm (Plastic)

Ferrule I.D. ( $\mu$ m)	
<b><math>\varnothing</math> 125, <math>\varnothing</math> 126</b>	

(Required)	
0	<b>0</b>

Package	
2	Individual Package
3	<b>Bulk Package</b>

Cap	
4	Blue PVC
A	<b>Black Ferrule Cap</b>

Marking of Grip	
1	<b>SII / SSC-P</b>

Plug

**SSC-PE Series**  
**Easy Assembly**  
**Designed for**  
 **$\varnothing$  0.9 mm Buffer Cable**  
 **$\varnothing$  2.0 mm Cable**  
 **$\varnothing$  3.0 mm Cable**  
**Single Mode**