





P.C. MOUNTING

SWITCH FUNCTION	POS. 1	POS. 2	POS. 3
ON	1	2	3
OFF	1	3	2
OPEN	1	4	2
2-3, 5-6	1	3	2



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- CONTACT RATING: 2A @ 250VAC
5A @ 120VAC OR 28VDC
- ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT
- CONTACT RESISTANCE: 10 mΩ OHM MAX. INITIAL @ 2-4 VDC
100mA FOR BOTH SILVER AND GOLD PLATING

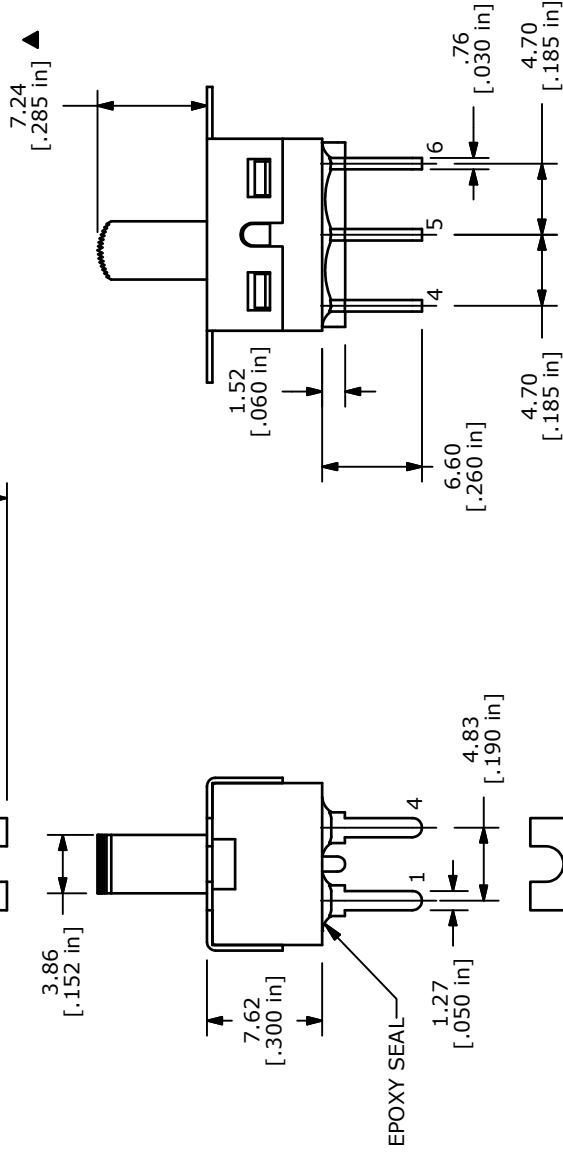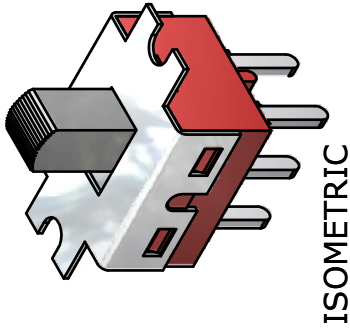

TITLE 500SDP3S2M2QEB

A	19628	NEW RELEASE	1/28/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1 DATE 1/28/2011 DR BGL

DWG T521027 REV A