



Description

KBJ200~210

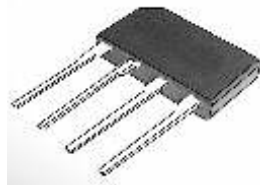

KBJ-2

Mechanical Dimensions

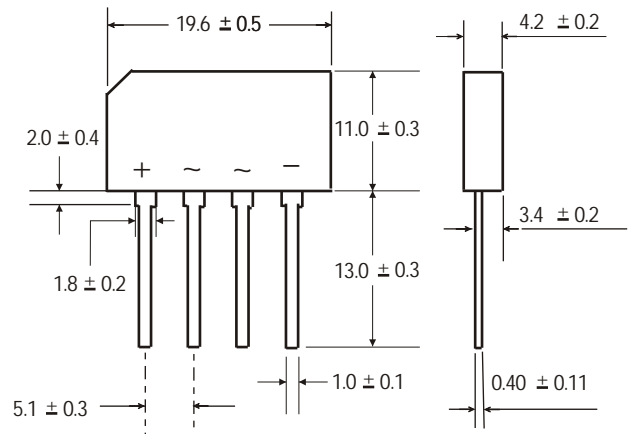

Dimensions in millimeters(1mm =0.0394inch)

Features

- This series is UL listed under the Recognized Component Index, file number E142814
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High case dielectric strength of 1500VRMS Ideal for printed circuit boards
- High surge current capability

Mechanical Data

- Case : Molded plastic body over passivated junctions
- Terminals : Plated leads solderable per MIL-STD-750, Method 2026
- Polarity : Polarity symbols molded on body
- Mounting Position : Any(3)
- Mounting Torque : 5 in-lbs max.
- Weight : 0.15 ounce, 4.0 grams (approx)

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

Parameter	Symbol	KBJ 200	KBJ 201	KBJ 202	KBJ 204	KBJ 206	KBJ 208	KBJ 210	Unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current TA=25°C	IF(AV)	2.0(1)							A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM	50.0							A
Rating for fusing (t<8.3ms)	I ² t	60							A ² sec
Maximum thermal resistance per leg	RejA RejC	2.6(2) 5 (1)							°C / W
Operating junction and storage temperature range	TJ, TSTG	-55 to + 150							°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	KBJ 200	KBJ 201	KBJ 202	KBJ 204	KBJ 206	KBJ 208	KBJ 210	Unit
Maximum instantaneous forward voltage drop per leg at 2.0A	VF	1.1							V
Maximum DC reverse current at rated DC blocking voltage per leg TA=25°C TA=125°C	IR	10 250							μA

- Notes:** (1)Unit case mounted on Al plate heatsink.
(2)Units mounted on P.C.B. with 0.5x0.5"(12x12mm) copper pads and 0.375"(9.5) lead length.
(3)Recommended mounting position is to bolt down on heat sink with silicone thermal compound for maximum heat transfer with #6 screw.

2.0 A Single-Phase Silicon Bridge Rectifier

Fig. 1 Derating Curve for Output Rectified Current

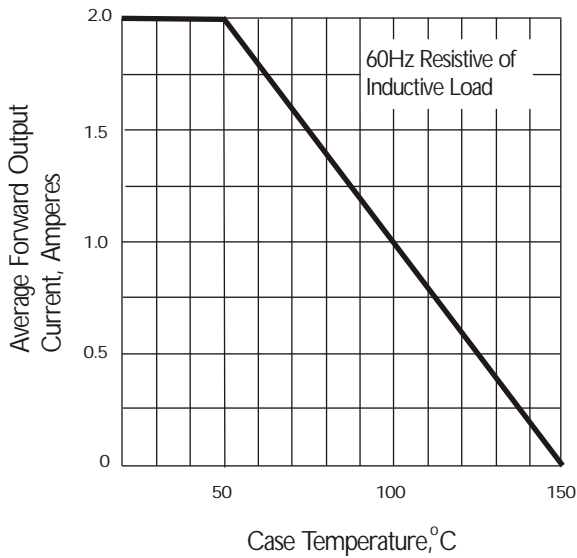


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

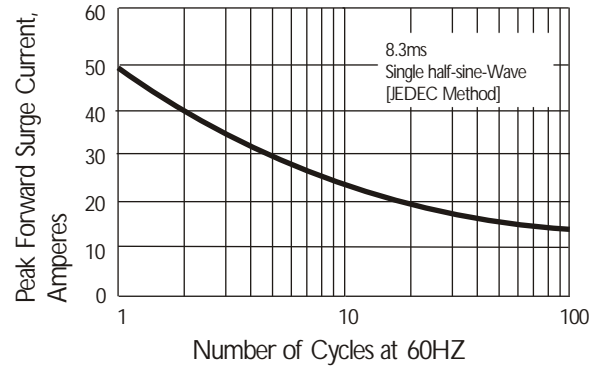


Fig. 3 Typical Instantaneous Forward Characteristics

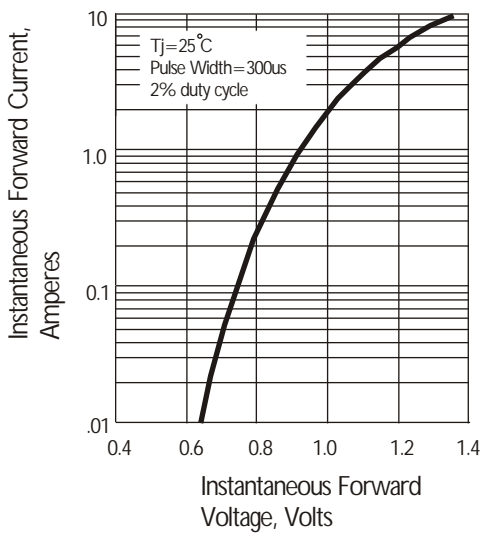


Fig. 4 Typical Reverse Characteristics

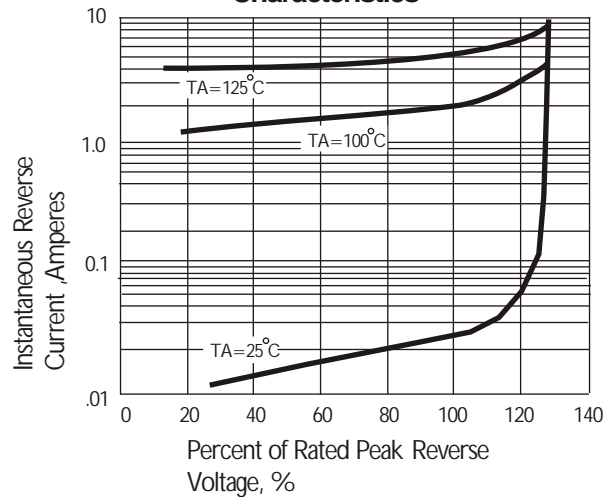


Fig. 5 Typical Junction Capacitance

