



Rev	AWO #	Description	Date	Appr
-	11419	RELEASED	6/7/011	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

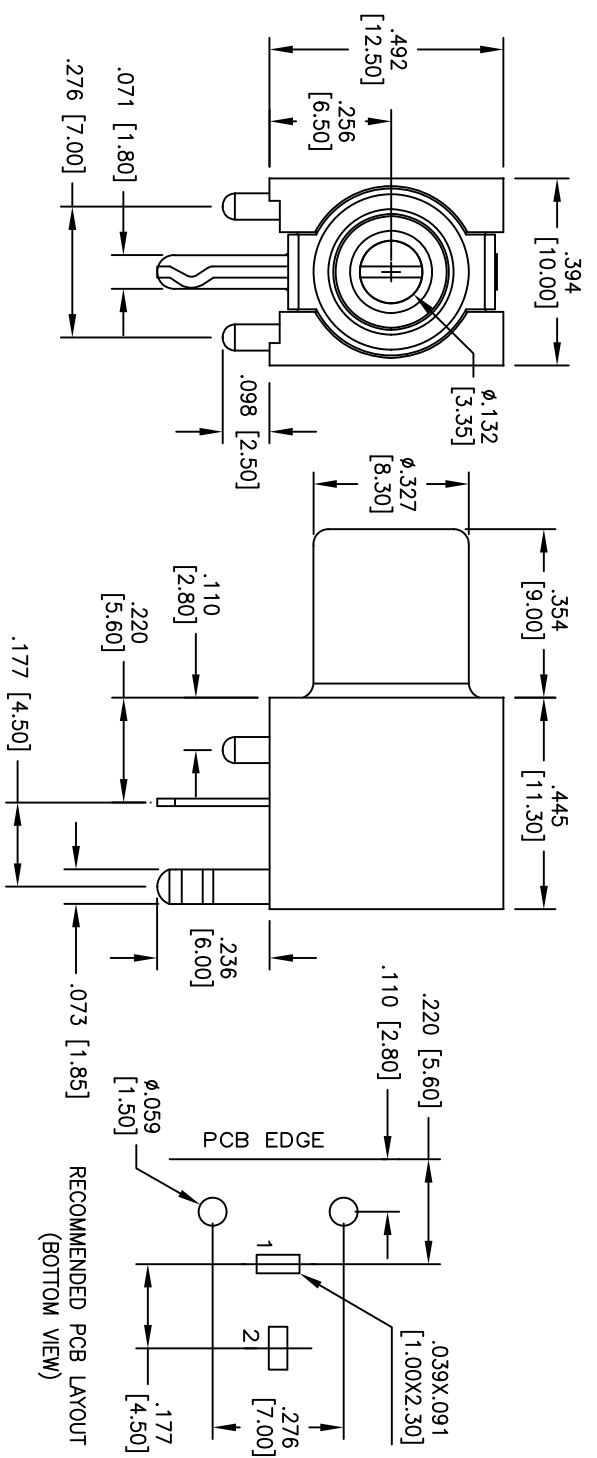

RECOMMENDED PCB LAYOUT  
 (BOTTOM VIEW)



**SPECIFICATIONS:**  
 Material:  
 Housing: PBT, glass reinforced, color Orange  
 Contacts: Brass  
 Barrel: Brass, Gold plated  
 Plating:  
 Gold flash over Nickel underplate overall.  
 Electrical:  
 Operating voltage: 12V DC max.  
 Current rating: 2A max.  
 Contact resistance: 30 mohms max. @ AC 100mA max.  
 Insulation resistance: 100 Mohms min @ 500V DC  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.

**UNLESS OTHERWISE SPECIFIED**  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLEES  
 .X ± .10 ØX ± .10  
 .XX ± .020 ØXX ± .015  
 .XXX ± .015 ØXXX ± .010  
 APPROVALS DATE

DRAWN	DY	6/10/11
CHECKED		
APPROVED		

<b>ADAM TECH</b>		909 Railway Avenue, Union, NJ 07083		Phone: 908-687-5000 Fax: 908-687-5710	
TITLE		RCA JACK, RIGHT ANGLE, PCB			
COLOR ORANGE, GOLD PLATED		PART NO. RCA-24-1-0-G			
REF:	S00095T	SCALE:	NTS	SHEET:	1 OF 1

6 5 4 3 2 1

6 5 4 3 2 1