




TOP VIEW

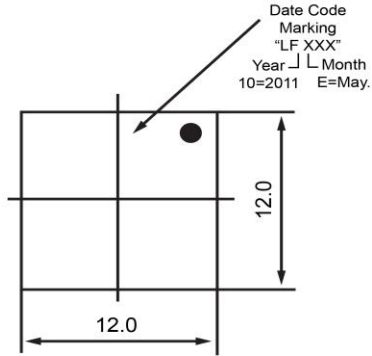


SIDE VIEW (1)




SIDE VIEW (2)






SIDE VIEW (3)



BOTTOM VIEW



Specifications			Notes	Revision History								
Description	Value	Unit		Version	Description	Date	Approved					
Technology	Piezo		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	10/21/2013	J.S.					
Resonant Frequency	4,000	(Hz)		2	Updated Operating/Storage Temp	8/7/2014	J.S.					
Rated Voltage	3	(V)										
SPL @ 10cm	75	(dBA)										
Capacitance	15,000	(pF)										
Mount Type	Surface Mount											
Voltage Range	1 ~ 25	(V)										
Max Rated Current	5	(mA)										
Housing Material	LCP											
Operating Temperature	-40 ~ +85	°C										
Storage Temperature	-40 ~ +85	°C										
Weight	1	(g)										
												
										<table border="1"> <thead> <tr> <th>Drawn by</th> <th>Date</th> <th>Checked by</th> <th>Date</th> <th>Approved by</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td>A.B.</td> <td>10/21/2013</td> <td>C.E.</td> <td>10/21/2013</td> <td>J.S.</td> <td>10/21/2013</td> </tr> </tbody> </table>	Drawn by	Date
Drawn by	Date	Checked by	Date	Approved by	Date							
A.B.	10/21/2013	C.E.	10/21/2013	J.S.	10/21/2013							