
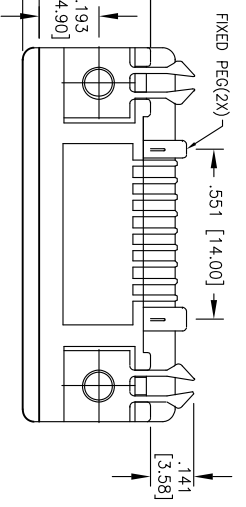
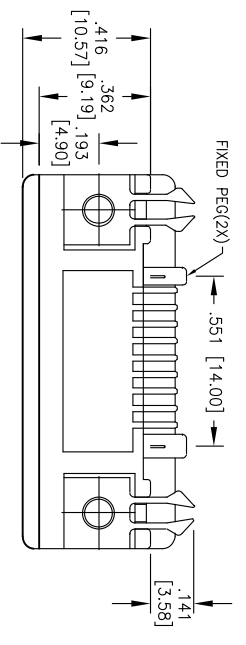

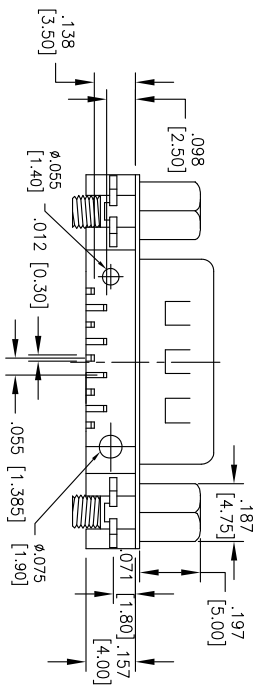
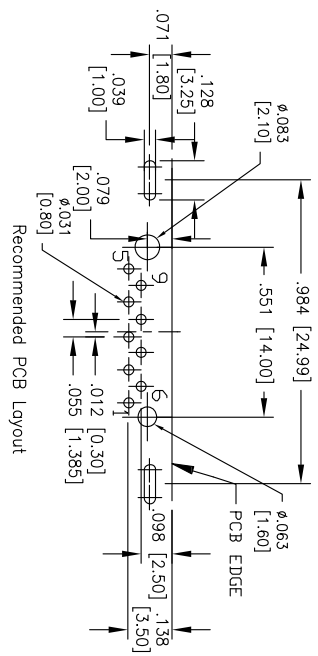


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/5/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

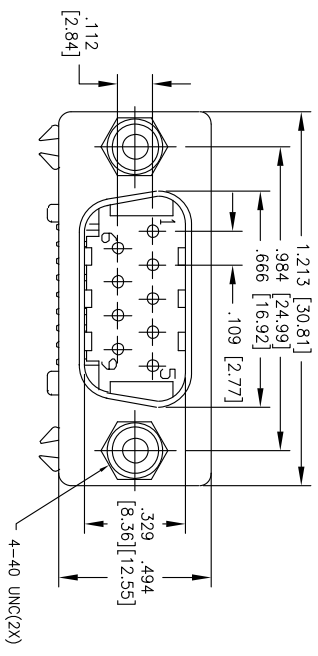

**SPECIFICATIONS:**

- Material: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Shell: Steel, Tin plated.
- Board lock: Brass
- Nut: Brass
- Screw: Brass

- Plating: Gold over Nickel underplate on contact area, Tin over Copper underplate on tails
- Electrical: Rated Voltage: 300V DC
- Rated Current: 5A
- Contact resistance: 13 mohms max
- Insulation resistance: 1000 Mohms min @ DC 500V
- Withstanding voltage: 500V AC for 1 minute
- Temperature Rating: Operating Temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .015
.XXX	± .010
APPROVALS	DATE
DRAWN	AY
CHECKED	JL
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB PLUG, RIGHT ANGLE SLIM TYPE

SIZE	PART NO.	REV.
X	DE09-PUN-25	-
REF: S00003T	SCALE: NTS	SHEET 1 OF 1

DATE	1/5/11
DATE	1/5/11
DATE	1/5/11