



RECOMMENDED P.C.B. LAYOUT

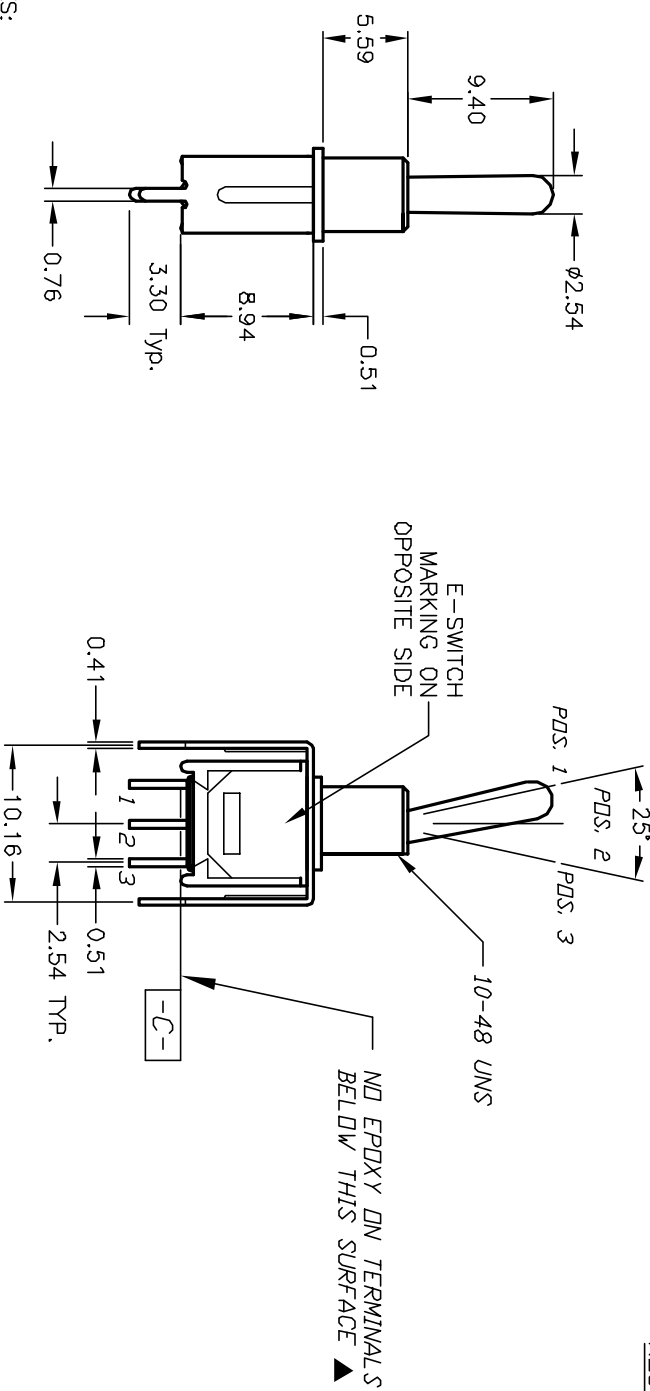

CIRCUIT: SPD1
CONTACT CONFIGURATION

SWITCH FUNCTION		
PQS. 1	PQS. 2	PQS. 3
DN	NONE	DN
2-3	OPEN	2-1

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4 (YA) max. @20 VAC or DC max.
5. FIXED TERMINAL & MOVING CONTACT: Cu alloy w/ Silver plate
6. ELECTRIC LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

						TITLE	
						200MSP1T1B2VS2QE	
A	12979	RELEASED FOR PRODUCTION	3/28/03	AR			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
SCALE		DATE	DR	DWG	REV		
2:1		3/28/03	AR	T211026	A		