

Pb Free Plating Product

MURF1520G thru MURF1560G




15.0 Ampere Glass Passivated Chip Ultrafast Recovery Rectifier Diode

Features


- ◆ Glass passivated junction/EPI(PG process)
- ◆ Fast recovery time for high efficiency
- ◆ Low reverse leakage current
- ◆ High surge capacity

Mechanical Data

- ◆ Case: Insulated Plastic TO-220F-2L FullPak
- ◆ Terminals: Lead solderable per MIL-STD-202, Method 208
- ◆ Polarity: As marked
- ◆ Standard packaging: Any
- ◆ Weight: 0.08 ounces, 1.9 gram approximately



TO-220F-2L

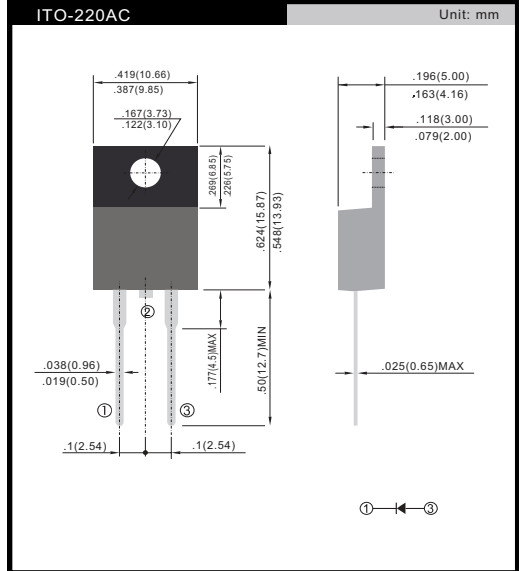

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.


Parameter	Symbol	MURF1505G	MURF1510G	MURF1520G	MURF1540G	MURF1560G	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	Volts
Maximum average forward rectified current at $T_C=100^\circ\text{C}$	$I_{F(AV)}$	15.0					Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150.0					Amps
Maximum instantaneous forward voltage at 15.0A	V_F	0.98			1.30	1.70	Volts
Maximum DC reverse current at rated DC blocking voltage @ $T_J=25^\circ\text{C}$ @ $T_J=100^\circ\text{C}$	I_R	5.0			250		μA
Maximum reverse recovery time at $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_L=0.25\text{A}$	t_{rr}	35			60		nS
Typical junction capacitance at 4.0V, 1MHz	C_J	160					pF
Typical thermal resistance	$R_{\theta JC}$	3.0					$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150					$^\circ\text{C}$

Notes: 1. Pulse test: Pulse width 300 usec, Duty cycle 2%

RATINGS AND CHARACTERISTIC CURVES


($T_A = 25^\circ\text{C}$ unless otherwise noted)

Figure 1
Typical Forward Characteristics

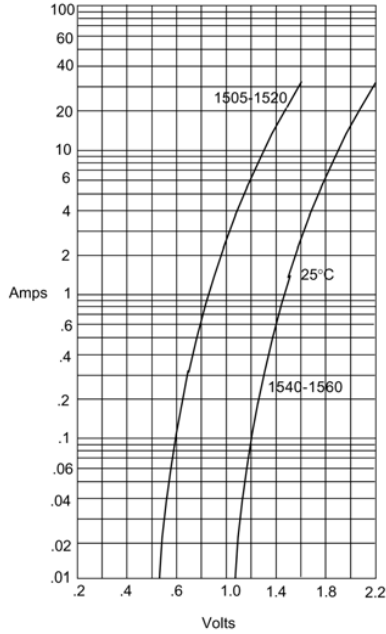


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Typical Reverse Characteristics

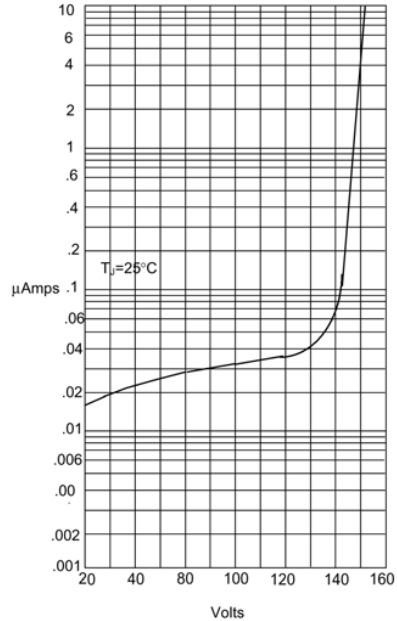


Instantaneous Reverse Leakage Current - MicroAmperes versus
Percent Of Rated Peak Reverse Voltage - Volts

Figure 3
Forward Derating Curve

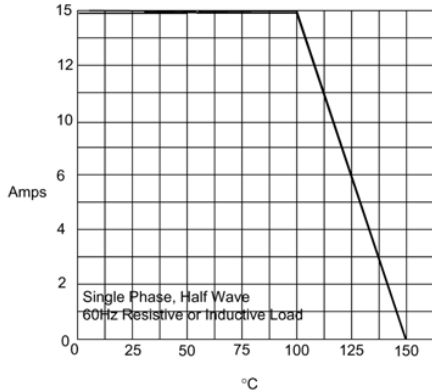

Average Forward Rectified Current - Amperes versus
Case Temperature - $^\circ\text{C}$

Figure 4
Maximum Non-Repetitive Forward Surge Current

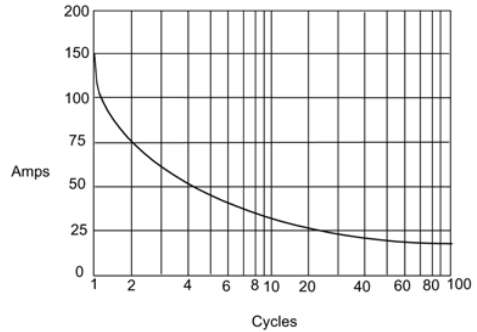

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles