


D-Sub Connector

9 Pin PCB Mount Plug



Specifications

Shell	: Steel, Tin-Plated
Contact	: Brass, Stamped Pin Gold-Plated
Insulator	: PBT & Fiber - Glass Reinforced
Current Rating	: 5 Amps
Dielectric Strength	: 1,000V for One Minute
Insulator Resistance	: 1,000MΩ Min. at 500V DC
Temperature	: -50°C to +105°C

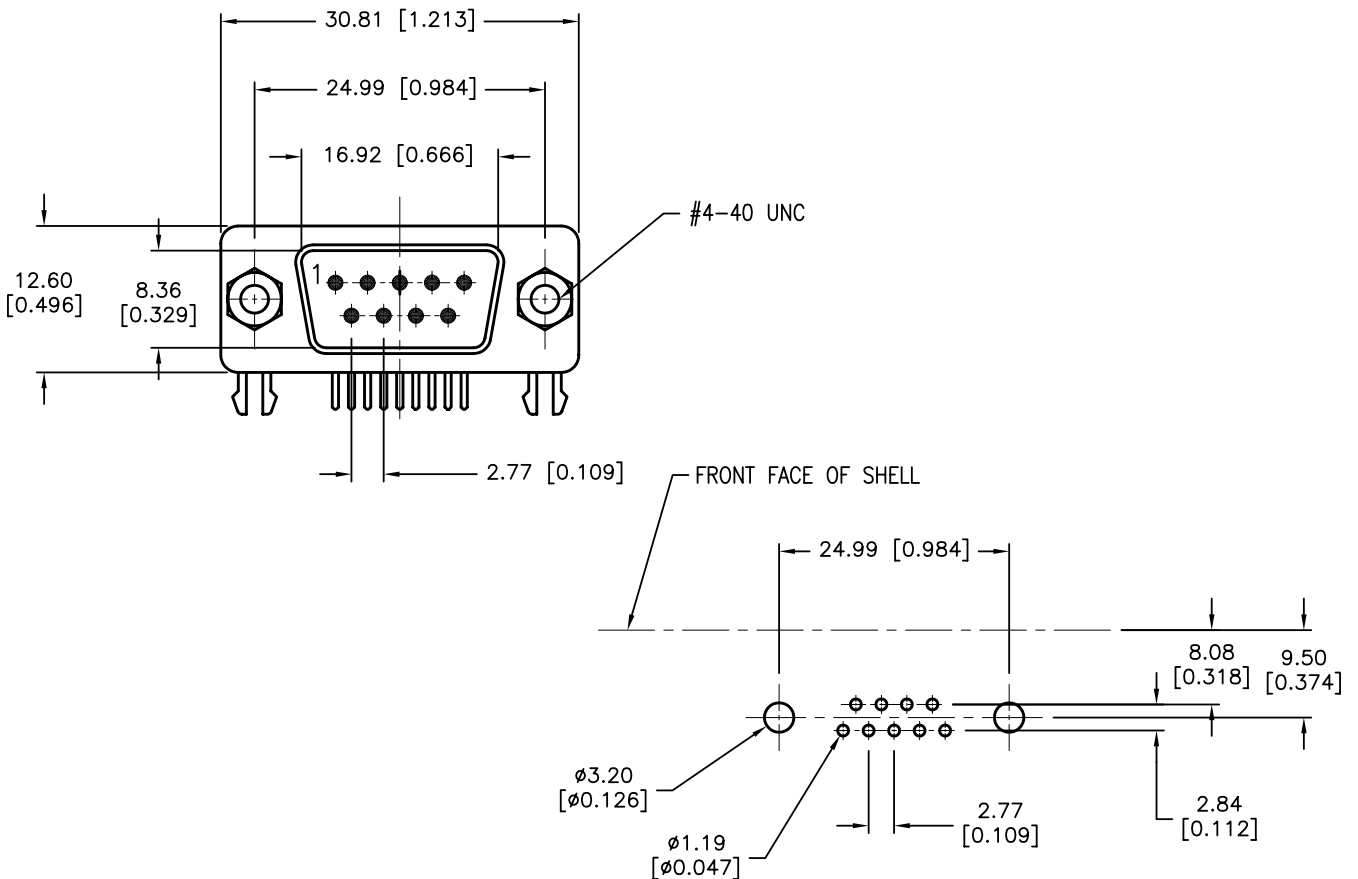

P.C.B. LAYOUT

Dimensions : Millimeters (Inches)

