

233-100-H7
Jam Nut Mount Hermetic Receptacle
MIL-DTL-38999 Series III Type



How To Order: Commercial

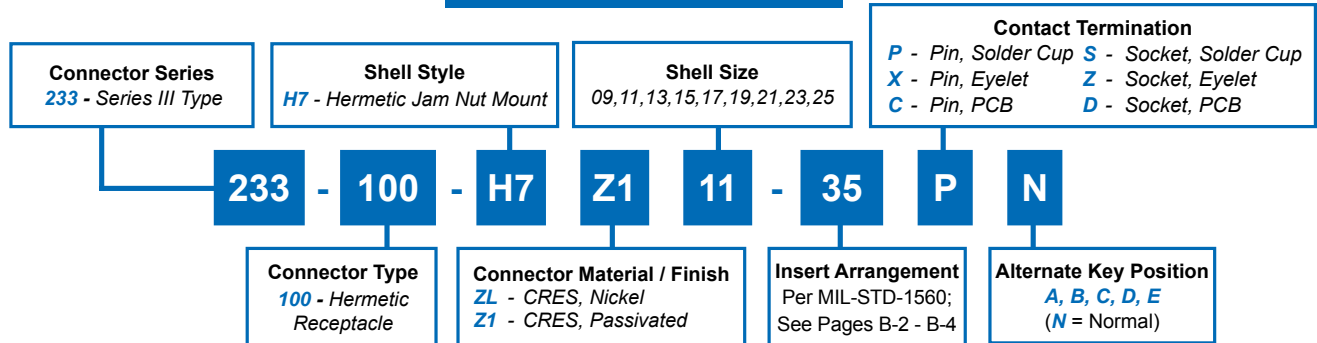


TABLE I: CONNECTOR DIMENSIONS

SHELL SIZE CODE	SHELL SIZE	A THREAD -0.1P-0.03L-TS	B DIA	C A/F ±.015(0.4)	D FLAT ±.005(0.1)	E DIA ±.012(0.3)	F DIA	G THREAD ISO METRIC	H ±.032(0.8)
A	9/09	0.625	1.200(30.5) 1.178(29.9)	1.063(27.0)	.650(16.5)	.603(15.3)	.653(16.6) .642(16.3)	M17 X 1.0-6g	.094(2.4)
B	11	0.750	1.385(35.2) 1.363(34.6)	1.252(31.8)	.750(19.1)	.725(18.4)	.775(19.7) .764(19.4)	M20 X 1.0-6g	.094(2.4)
C	13	0.875	1.511(38.4) 1.489(37.8)	1.374(34.9)	.937(23.8)	.851(21.6)	.905(23.0) .894(22.7)	M25 X 1.0-6g	.094(2.4)
D	15	1.000	1.637(41.6) 1.615(41.0)	1.500(38.1)	1.061(26.9)	.977(24.8)	1.031(26.2) 1.020(25.9)	M28 X 1.0-6g	.094(2.4)
E	17	1.187	1.763(44.8) 1.741(44.2)	1.626(41.3)	1.186(30.1)	1.103(28.0)	1.153(29.3) 1.142(29.0)	M32 X 1.0-6g	.094(2.4)
F	19	1.250	1.948(49.5) 1.926(48.9)	1.811(46.0)	1.311(33.3)	1.229(31.2)	1.278(32.5) 1.268(32.2)	M35 X 1.0-6g	.094(2.4)
G	21	1.375	2.074(52.7) 2.051(52.1)	1.937(49.2)	1.436(36.5)	1.351(34.3)	1.405(35.7) 1.394(35.4)	M38 X 1.0-6g	.094(2.4)
H	23	1.500	2.200(55.9) 2.177(55.3)	2.063(52.4)	1.561(39.6)	1.477(37.5)	1.531(38.9) 1.520(38.6)	M41 X 1.0-6g	.094(2.4)
J	25	1.625	2.322(59.0) 2.300(58.4)	2.189(55.6)	1.686(42.8)	1.603(40.7)	1.653(42.0) 1.642(41.7)	M44 X 1.0-6g	.094(2.4)

TABLE I: (Continued) CONNECTOR DIMENSIONS

J ±.008(0.2)	K DIA ±.005 (0.1)	L MAX	M MAX		N ±.005 (0.1)
			P&X	S&Z	
.106(2.7)	.693 (17.60)	1.149(29.2)	.208(5.3)	.232(5.9)	.652 (16.56)
.106(2.7)	.825 (20.96)	1.149(29.2)	.208(5.3)	.232(5.9)	.766 (19.46)
.106(2.7)	1.010 (25.65)	1.153(29.3)	.200(5.1)	.224(5.7)	.950 (24.13)
.106(2.7)	1.135 (28.83)	1.153(29.3)	.200(5.1)	.224(5.7)	1.080 (27.43)
.106(2.7)	1.260 (32.01)	1.153(29.3)	.200(5.1)	.224(5.7)	1.205 (30.61)
.138(3.5)	1.385 (35.18)	1.185(30.1)	.200(5.1)	.224(5.7)	1.330 (33.78)
.138(3.5)	1.510 (38.35)	1.185(30.1)	.200(5.1)	.224(5.7)	1.455 (36.96)
.138(3.5)	1.635 (41.53)	1.185(30.1)	.200(5.1)	.224(5.7)	1.580 (40.13)
.138(3.5)	1.760 (44.70)	1.185(30.1)	.200(5.1)	.224(5.7)	1.705 (43.31)

HERMETIC LEAK RATE MOD CODES

Designator	Required Leak Rate
-585A	1 x 10 ⁻¹⁰ cc Helium per second
-585B	1 x 10 ⁻⁹ cc Helium per second
-585C	1 x 10 ⁻⁸ cc Helium per second

Dimensions in Inches (millimeters) are subject to change without notice.