

GPTK2126



PHASE CONTROLLED SCR

High reliability operation

DC power supply

AC drives

VOLTAGE UP TO	1600 V
AVERAGE CURRENT	1260 A
SURGE CURRENT	12 kA

BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
V _R RM	Repetitive peak reverse voltage	1600 V
V _R SM	Non-repetitive peak reverse voltage	1700 V
V _D RM	Repetitive peak off-state voltage	1600 V
I _D RM	Repetitive peak off-state current, max.	V _D RM, single phase, half wave, T _j = T _{jmax} 70 mA
I _R RM	Repetitive peak reverse current, max.	V _R RM, single phase, half wave, T _j = T _{jmax} 70 mA

ON-STATE CHARACTERISTICS

I _T (AV)	Average on-state current	Sine wave, 180° conduction, Th = 55 °C	1260 A
I _T (RMS)	R.M.S. on-state current	Sine wave, 180° conduction, Th = 55 °C	1979 A
I _T SM	Surge on-state current	Non rep. half sine wave, 50 Hz, V _R = 0 V, T _j = T _{jmax}	12 kA
I _t	I ² t for fusing coordination		720 kA ² s
V _T (TO)	Threshold voltage	T _j = T _{jmax}	0,91 V
r _T	On-state slope resistance	T _j = T _{jmax}	0,23 mΩ
V _T M	Peak on-state voltage, max	On-state current I _T = 2510 A, T _j = 25 °C	1,49 V
I _H	Holding current, max	T _j = 25 °C	150 mA
I _L	Latching current, typ	T _j = 25 °C	300 mA

TRIGGERING CHARACTERISTICS

V _{GT}	Gate trigger voltage	T _j = 25 °C, V _D = 5 V	2,5 V
I _{GT}	Gate trigger current	T _j = 25 °C, V _D = 5 V	250 mA
V _{GD}	Non-trigger voltage	V _D = 67% V _R RM, T _j = T _{jmax}	0,15 V
P _{GM}	Peak gate power dissipation	Pulse width 0.5 ms	100 W
P _G (AV)	Average gate power dissipation		5 W
I _{FGM}	Peak gate current		30 A
V _{FGM}	Peak gate voltage (forward)		12 V
V _{RGM}	Peak gate voltage (reverse)		3 V


SWITCHING CHARACTERISTICS

di/dt	Critical rate of rise of on-state current	T _j = T _{jmax}	200 A/μs
dV/dt	Critical rate of rise of off-state voltage	T _j = T _{jmax}	1000 V/μs
t _q	Turn-off time, typ	T _j = T _{jmax} , I _T = 800 A, di/dt = -12.5 A/μs VR = 100 V, VD = 67% V _D RM, dV/dt = 20 V/μs	300 μs


THERMAL AND MECHANICAL CHARACTERISTICS

R _{th(j-c)}	Thermal resistance (junction to case)	Double side cooled	0,033 °C/W
R _{th(c-h)}	Thermal resistance (case to heatsink)	Double side cooled	0,001 °C/W
T _{jmax}	Max operating junction temperature		125 °C
T _{stg}	Storage temperature		-40 / 125 °C
F	Clamping force ± 10%		15 kN
	Mass		320 g


Current rating - sine wave

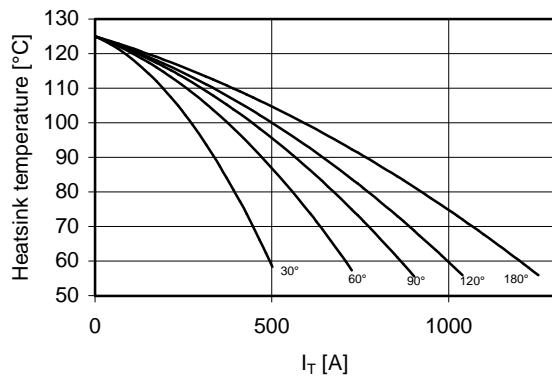


Power loss - sine wave

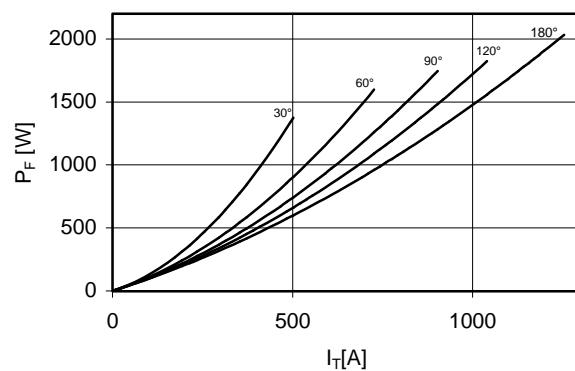



**Maximum surge current
d.s. cooled**

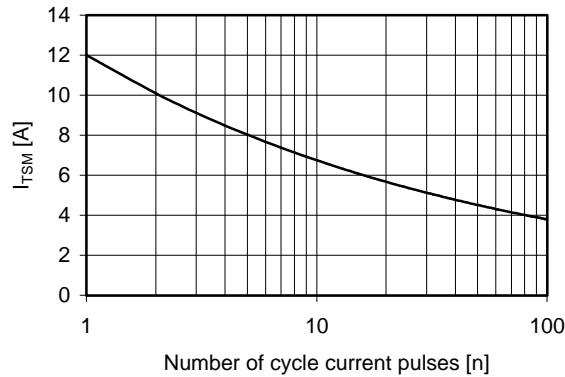

On-state voltage drop

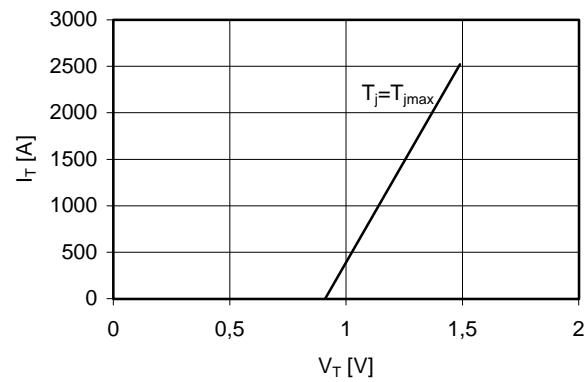

Thermal impedance (j-c)

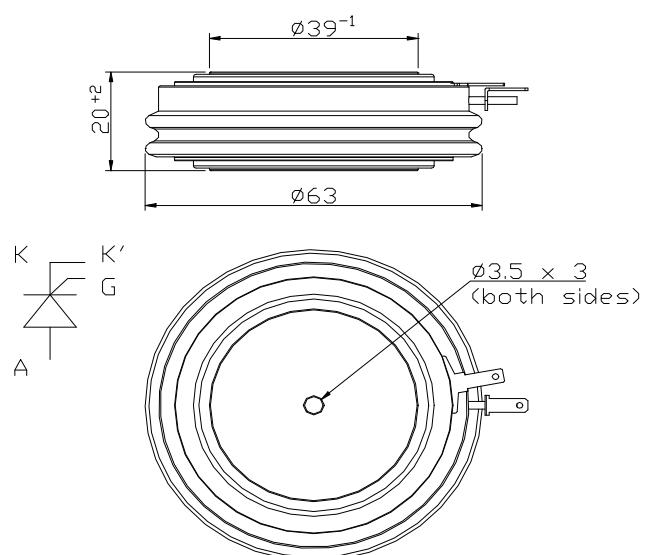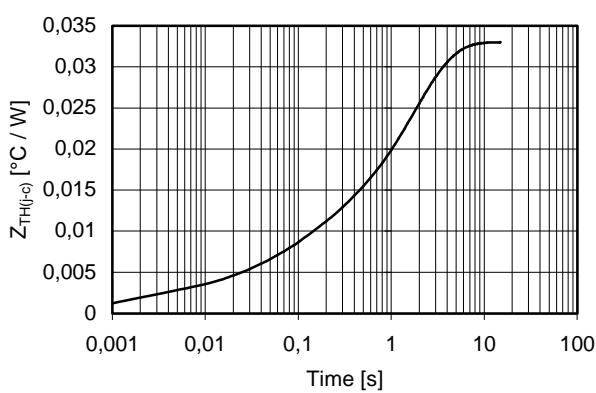

In the interest of product improvement Green Power Semiconductors reserves the right to change any specification given in this data sheet without notice.