

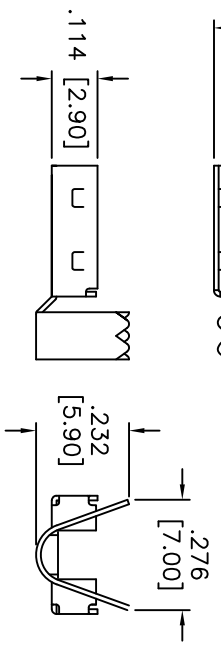


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/26/10	

APPROVED: _____
 DATE: _____ TITLE: _____

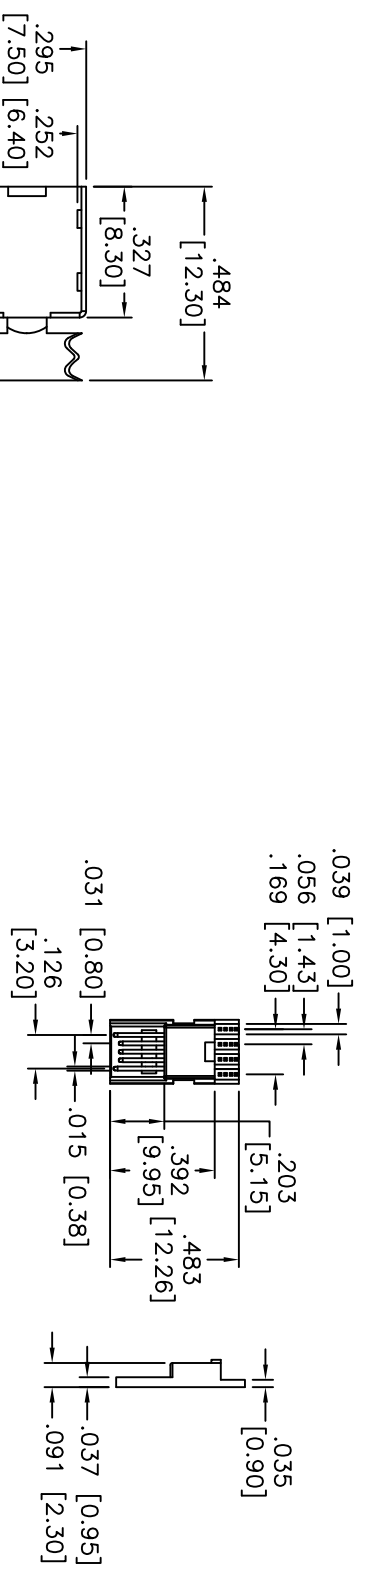

FRONT SHELL

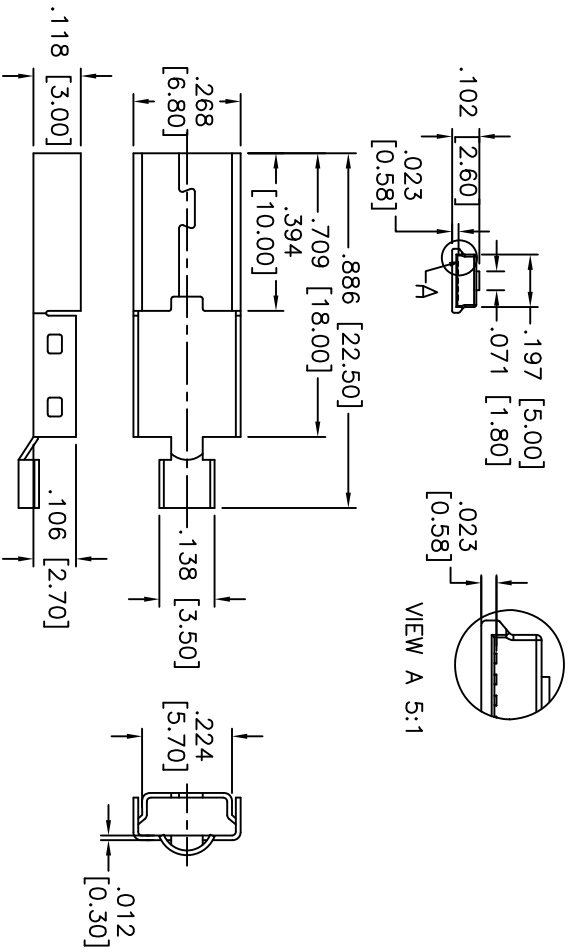

BACK SHELL

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass

Plating:

Gold Flash over Nickel underplate on contact area,
 Tin over Copper underplate on PCB tails
 Shell: Cold rolled steel, Nickel plated.

Electrical:

Current rating: 1 Amps max
 Contact resistance: 30 Mohms max
 Insulation resistance: 1000 Mohms min @ DC500V
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: -55°C to +105°C



Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ±.10 Ø.X ±.10
 .XX ±.020 Ø.XXX ±.015
 .XXX ±.015 Ø.XXX ±.010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MINI USB, 5PIN, MALE SOLDER

APPROVALS	DATE	TITLE	SIZE	PART NO.	SCALE	SHEET	REV.
DRAWN	DY	7/26/10	X	MUSB-B5-P3-S4	NTS	1	1
CHECKED							
APPROVED							