




5-Port Fast Ethernet PCI Switch Card

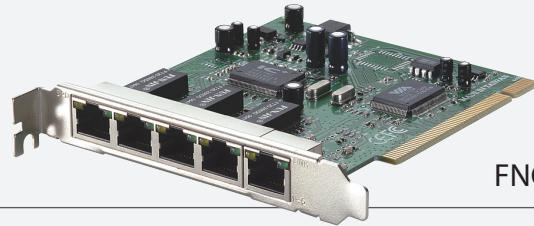


FNC-0600TXM

H/W Version: 2

Product Overview

The LevelOne FNC-0600TXM is a high performance 32-bit PCI Bus SNMP Fast Ethernet adapter with 5-port 10/100Mbps Switch. The N-way ports auto-negotiate between 10Mbps and 100Mbps, which offer 200 Mbps aggregate bandwidth. It also supports a range of critical performance and advanced management-related features including 802.1p priority transmissions, TCP/IP checksum offload, IEEE802.3x flow control and adaptive interrupts.

The switch card uses the management controller which is a SNMP/RMON/DMI function-ready single ASIC chip solution for use with PC server level NIC adaptors. It is designed to function with the SOHO systems application requirements and industrial PCs with advanced low power processing to reduce power consumption for power sensitive applications and Green PCs. With Plug-and-Play function, the user can easily install and configure the switch card with minimum effort.



1. 10/100Mbps RJ-45 Ports

Key Features

- 32-bit PCI v2.2 Bus interface
- Store-and-Forward switching method
- Supports flow control IEEE 802.3x for full-duplex mode and back-pressure flow control for half-duplex mode
- Self-defines 256 bytes memory I/O or register I/O based command and status register
- With SNMP/RMON/DMI network management function
- Real 32-bit turbo driver is provided for maximum performance
- Supports MDI/MDIX for each port
- Supports MAC enhancement function for management server NIC
- Space saving design and RoHS compliant

Driver Supported

- Windows NT3.1, 3.5, 4.0/ 95/98/ME/2000/XP/7
- Windows for workgroups, Microsoft LAN Manager
- Novell Netware 3.x, 4.x, 5.x, ODI Driver,
- Novell Netware Client 32
- Novell Analyser, Personal Netware IBM
- LAN support program, IBM OS/2 Warp Server, IBM OS/2 LAN Server.
- IBM TCP/IP for DOS & OS/2
- Linux and FreeBSD
- UnixWare
- FTP PC/TCP and SUN PCNFS
- SCO UNIX, SCO Open Server
- NDIS Driver
- Packet drivers (FTP PC/TCP, NCSA TCP/IP)

Works Well With



FBR-1161
ADSL2+ Modem Router



FNS-1020
1-Bay Simple Network Storage

Technical Specification

Standards Compliance

IEEE 802.3/ IEEE 802.3u
IEEE 802.3x Flow Control

Ports

5 x 10/100 Mbps RJ-45 ports

Mounting Method

PCI Slot

Transmission

Auto-negotiation (half/ full-duplex, 10/100 Mbps)

Filtering Rate

148,800 packets per second (max.)

Forwarding Rate

148,800 packets per second (max.)

MAC Address

1000 entries

RAM Buffer

1MB

Management

SNMP /RMON/ DMI

LEDs

Per Device: Power

Per RJ-45 port: Speed, Link/Act

Power Consumption

30 Watts (max)

Temperature

Operating: 0°C~50°C

Humidity

Operating: 10% ~ 90% (non-condensing)


Dimension

121mm(W) * 132mm(L) (include bracket)

EMI and Safety

FCC, CE

Product Diagram

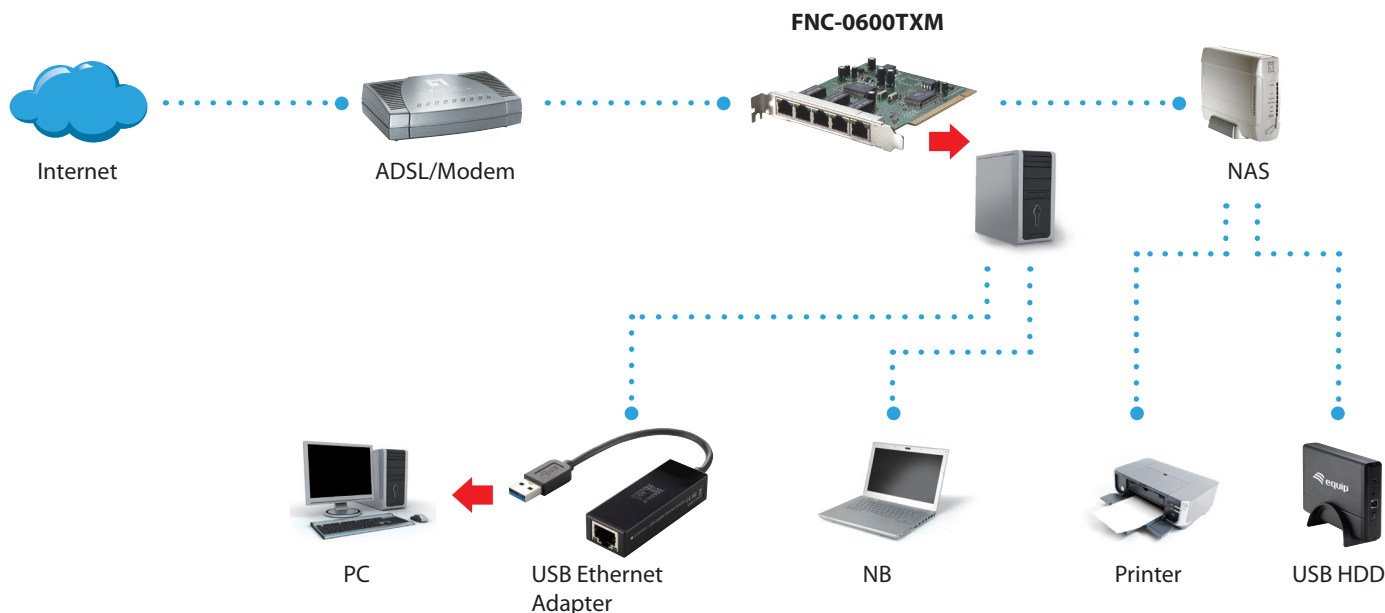

Order Information

Package Content

FNC-0600TXM: 5-Port Fast Ethernet PCI Switch Card

FNC-0600TXM

User Manual

CD - User Manual / Driver