

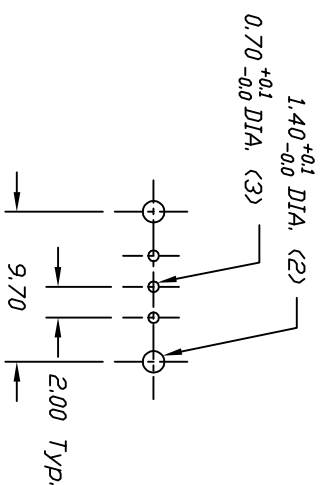
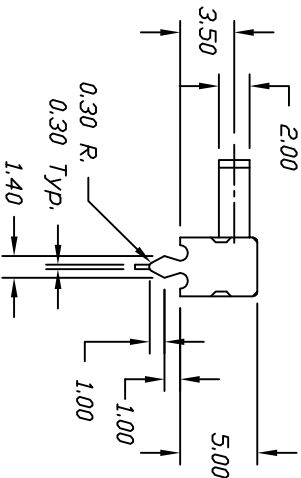
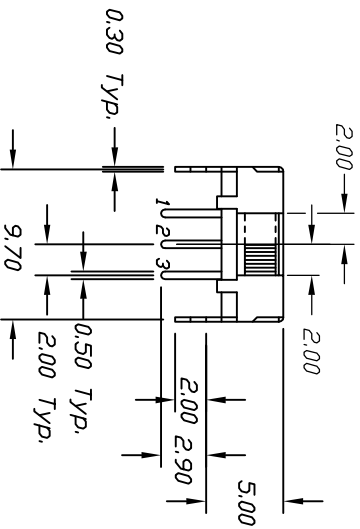




RECOMMEND P.C.B. LAYOUT

NOTES:

1. ALL DIMENSIONS IN MM (IN).
2. GENERAL TOLERANCE: X.X = +/- 0.4 mm
X.XX = +/- 0.25 mm
3. TERM. NDS. FOR REFERENCE ONLY
4. RATING: 0.2A @ 30VDC
5. CONTACT RESISTANCE: 30 MILLI-OHMS MAX. (INITIAL)
6. INSULATION RESISTANCE: 100 MEGA-OHMS MIN. @ 500VDC
7. DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE
8. OPERATING FORCE: 150-400 GRAMS
9. MATERIALS:
ACTUATOR: NYLON 66 ULHB
HOUSING: COLD ROLLED STEEL, TIN PLATE
TERMINALS: BRASS, SILVER PLATE
BASE: BAKELITE
10. MOVING CONTACT: PHOSPHORUS BRONZE, SILVER PLATE
11. OPERATING TEMP.: -10° C TO +60° C
12. MECHANICAL LIFE: 10,000 CYCLES
12. SOLDERABILITY: SEE E-SWITCH RECOMMENDED HAND AND WAVE SOLDERING PROFILES



CIRCUIT: SPDT

CONTACT CONFIGURATION

B	18398	ADD MANY SPECIFICATIONIS TO NOTES		2/10/09		BLR	
B		REVISED & REDRAWN					
REV.	PCR	DESCRIPTION		DATE		CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
TOLERANCES							
0.0				±0.4			
0.00				±0.25			
SCALE 2:1				TITLE EG 1213 Non-Shorting			
DATE 2/10/09				DR BLR			
DWG P040030				REV C			