



397 Route 281 – P.O. Box 1175  
 Tully, New York 13159-1175  
 Phone: 315 696-6676  
 Fax: 315 696 9923  
 Email: sales@acipower.com  
 www.acipower.com

# ACR-0801-1849

PRODUCT DATA SHEET – PAGE 1 OF 2

## 9.0" SINGLE BANK LED RAIL

*(Single Bank, 80V @ 70mA)*

10/8/09

### GENERAL DESCRIPTION


The ACR-0801-1849 is designed as a replacement for field replaceable, dual tube, single edge lit 10.4" CCFL displays. The rail utilizes protection circuits to ensure the whole rail will not fail in the unlikely event of an individual LED failure.

The rail requires the use of a constant current source to properly drive the LED's.

The LED rail is compatible with any of ACI's I-Drive series of LED Drivers.

### MECHANICAL / ENVIRONMENTAL

- Weight = 7.4 grams
- Altitude = 35,000 Ft maximum
- Humidity < 95% non-condensing
- Size (L x W x H) = 9.0 IN x 0.240 IN x 0.128 IN
- PCB thickness = 0.032 IN
- Input connector = CON1
- RoHS compliant

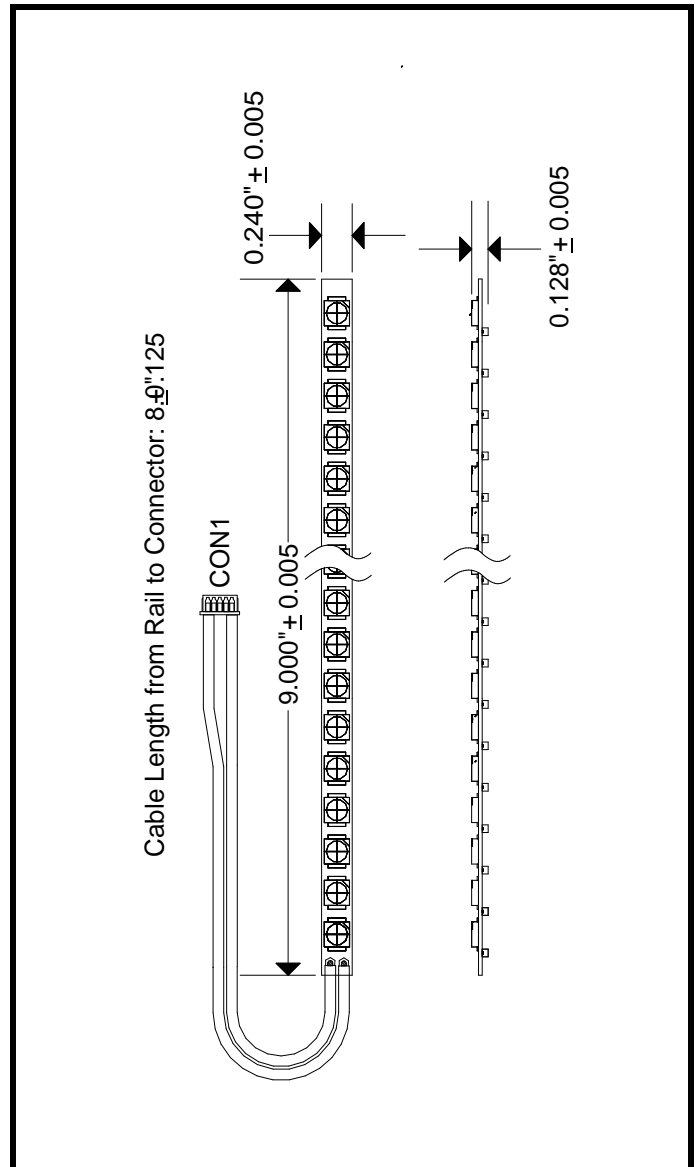

**397 Route 281 – P.O. Box 1175**  
**Tully, New York 13159-1175**  
**Phone: 315 696-6676**  
**Fax: 315 696 9923**  
**Email: sales@acipower.com**  
**www.acipower.com**

PRODUCT DATA SHEET – PAGE 2 OF 2

**MAXIMUM RATINGS**

10/8/09

Symbol	Parameter	Value	Unit
Tled	Operating temperature of LED edge light (light rail contact)	-20 to +75	Deg-C
Tstg	LED Rail storage temperature	-40 to +105	Deg-C
Ifwd	Maximum LED edge-light forward current (DC)	100	mA

**LED OPTICAL CHARACTERISTICS**

LED Manufacturer specifications for reference purpose only

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
BL	LED Brightness	Ifwd = 350mA	72	79	86	Lm
X	White X coordinate			0.300		-
Y	White Y coordinate			0.295		-

**LED RAIL ELECTRICAL CHARACTERISTICS**

Ifwd = 70mA, Tled = +75Deg-C (LED's without heat sinking to the display)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
Vfwd	LED rail forward voltage drop		72	80	88	Vdc

**TYPICAL LED RAIL PERFORMANCE GRAPHS**

