

FEATURES

- Power pack
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability Ultra low forward voltage drop
- High forward surge capability
- High frequency operation
- Meets MSL Level 1, per J-STD-020, LF MAX peak of 245°C (for TO-263,252 package)
- Solder bath temperature 275°C maximum,10s,per JESD22-B10 (for TO-220AB and ITO-220AB package)
- Component in accordance to RoHS 2011/65/EU




TO-220AB
SR10100SLCT




ITO-220AB
SRF10100SLCT



TO-252
SR10100SLM1



TO-263
SR10100SLD1



MECHANICAL DATA

- Case: JEDEC TO-220AB、ITO-220AB、TO-263、TO-252
- Molding compound meets UL94V-0 flammability rating
- Terminals: Lead solderable per J-STD-002 and JESD22-B102
- Polarity: As marked
- Mounting Torque: 10 in-lbs maximum

TYPICAL APPLICATIONS

For use in low voltage ,high frequency inverters ,DC/DC converters, free wheeling ,and polarity protection applications

PRIMARY CHARACTERISTICS

IF(AV)	2×5A
VRRM	100V
IFSM	150A
VF at IF=5.0A(25°C)	0.59V
IR	10 μ A
TJ(MAX)	150°C
Package	TO-220AB, ITO-220AB, TO-263, TO-252
Diode variations	Common cathode

MAXIMUM RATINGS

(Ratings at 25°C ambient temperature unless otherwise specified)

Parameter	Symbol	SR10100SLCT, SRF10100SLCT, SR10100SLD1,SR10100SLM1	Unit
Maximum repetitive peak reverse voltage	V _R RM	100	V
Maximum average forward rectified current (see fig.1)	Per leg	5.0	A
	Total device	10.0	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated TL)	I _F SM	150	A
Peak repetitive reverse current per diode at tp=2 μ s 1KHz	I _{RR} M	0.5	A
Operating junction and Storage temperature range	T _J ,T _{Stg}	-55 to+150	°C
Isolation voltage (ITO-220AB only) from terminals to heatsink t=1 min	V _{AC}	1500	V

RATINGS AND CHARACTERISTIC OF SR10100SLCT,SRF10100SLCT,SR10100SLD1,SR10100SLM1

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ Unless otherwise noted)

Parameter	Test Conditions		Symbol	TYP.	MAX.	Unit
Instantaneous forward voltage	Per Leg If=5.0A	$T_A=25^\circ\text{C}$	V_F ¹⁾	0.59	0.65	V
		$T_A=100^\circ\text{C}$		0.56	—	
		$T_A=125^\circ\text{C}$		0.54	—	
		$T_A=25^\circ\text{C}$		0.53	0.59	
	Per Leg If=3.0A	$T_A=100^\circ\text{C}$		0.47	—	
		$T_A=125^\circ\text{C}$		0.45	—	
		$T_A=25^\circ\text{C}$		10	50	$\mu\text{ A}$
		$T_A=100^\circ\text{C}$		2	—	mA
		$T_A=125^\circ\text{C}$		10	—	
Typical junction capacitance	4V, 1MHz		C_J	370		pF

Notes: 1.Pulse test: 300 μs pulse width,1% duty cycle

2.Pulse test: pulse width $\leqslant 40\text{ms}$

THERMAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ Unless otherwise noted)

Parameter	Symbol	SR10100SLCT	SRF10100SLCT	SR10100SLD1	SR10100SLM1	Unit
Typical thermal resistance ³⁾	$R_{\theta JC}$	2.5	4.5	2.5	2.5	$^\circ\text{C/W}$

3.Thermal resistance from junction to case

AVAILABALE PACK INFORMATION

Product code	Package	Box Size L×W×H(mm)	Quantity(pcs/box)	Carton SizeL×W×H(mm)	Quantity(box/carton)
SR10100SLCT-TO-220AB	P/T	558×148×38	1000	565×225×170	5
SRF10100SLCT-ITO-220AB	P/T	558×148×38	1000	565×225×170	5
SR10100SLD1-TO-263	P/T	558×148×38	1000	565×225×170	5
SR10100SLM1-TO-252	P/T	558×148×38	4000	565×225×170	5

RATINGS AND CHARACTERISTIC OF SR10100SLCT,SRF10100SLCT,SR10100SLD1,SR10100SLM1

FIG.1-FORWARD CURRENT DERATING CURVE

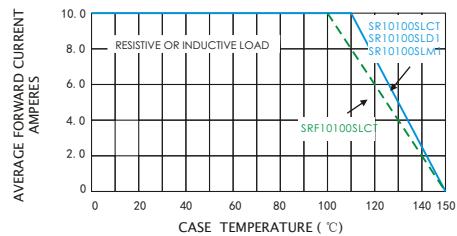


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

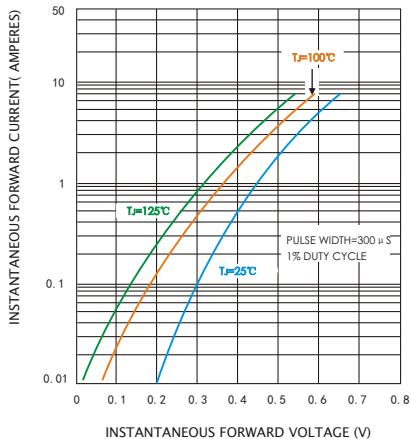


FIG.5-TYPICAL JUNCTION CAPACITANCE

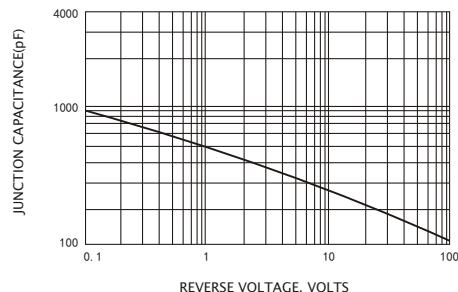


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


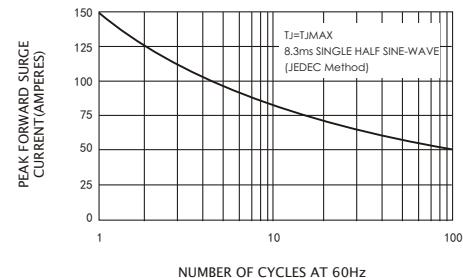



FIG.4-TYPICAL REVERSE CHARACTERISTICS

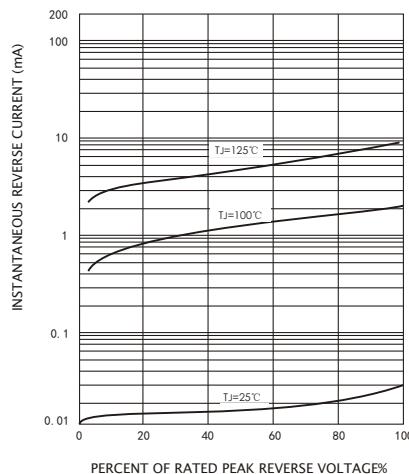


PACKAGE OUTLINE DIMENSIONS

Dimensions in inches and (millimeters)


TO-220AB

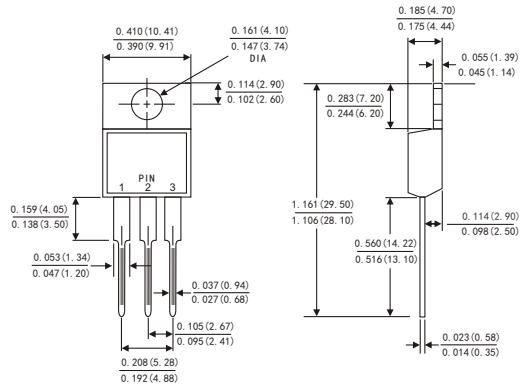


ITO-220AB

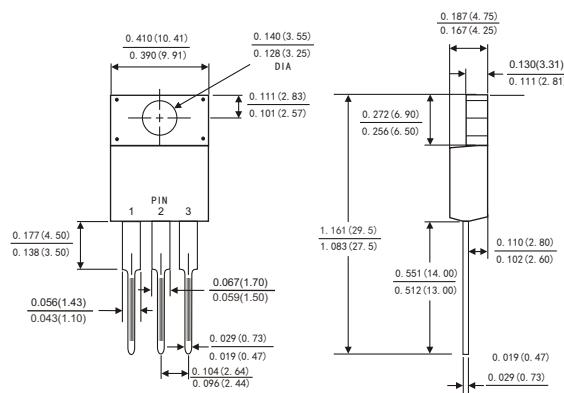

TO-263

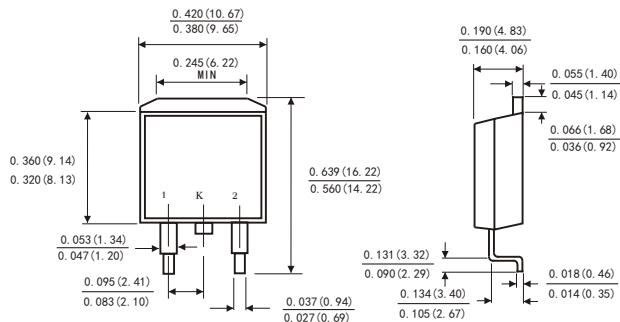


TO-252

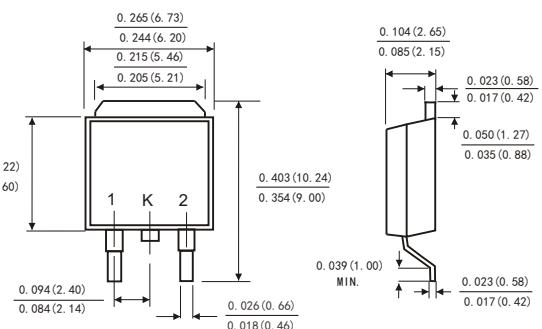

Suggested Pad Layout

(TO-263)

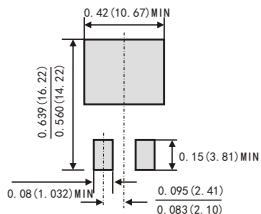

Suggested Pad Layout

(TO-252)

