



Features

- ◇ For IF SAW filter
- ◇ High attenuation
- ◇ Single-ended operation
- ◇ Dual In-line Package
- ◇ RoHS compliant (2002/95/EC), Pb-free

Specifications

Parameter	Unit	Minimum	Typical	Maximum
<i>Center Frequency</i>	MHz	131.7	131.8	131.9
<i>Insertion Loss</i>	dB	-	26.3	30
<i>1.5dB Bandwidth</i>	MHz	4.4	4.45	-
<i>3dB Bandwidth</i>	MHz	4.5	4.57	-
<i>30dB Bandwidth</i>	MHz	-	5.20	5.25
<i>40dB Bandwidth</i>	MHz	-	5.29	5.4
<i>50dB Bandwidth</i>	MHz	-	5.35	5.6
<i>Passband Variation</i>	dB	-	0.6	1
<i>Ultimate Rejection(+/-5.95MHz)</i>	dB	50	52	-
<i>Absolute Delay</i>	usec	-	3.29	4
<i>Material Temperature coefficient</i>	KHz/°C	0.13		
<i>Substrate Material</i>	-	QZ		
<i>Ambient Temperature</i>	°C	25		
<i>Operating Temperature Range</i>	°C	-25	-	+85
<i>DC Voltage</i>	V	0		
<i>Input Power</i>	dBm	-	-	10
<i>ESD Class</i>	-	1C		
<i>Package Size</i>	DIP3512 (35.0x12.8x4.7)			


Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.

	SIPAT Co., Ltd. (CETC No.26 Research Institute) #14 Nanping Huayuan Road, Chongqing, China, 400060	Part Number	LBS13202	
		Rev. Date	2013-09-03	
		Ver.	1.0	Page 1/3

Matching Configuration


手动测试座

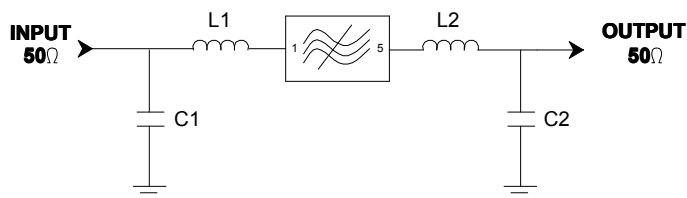

L1=120nH L2=82nH
C1=27pF C2=36pF
Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

Package Dimension

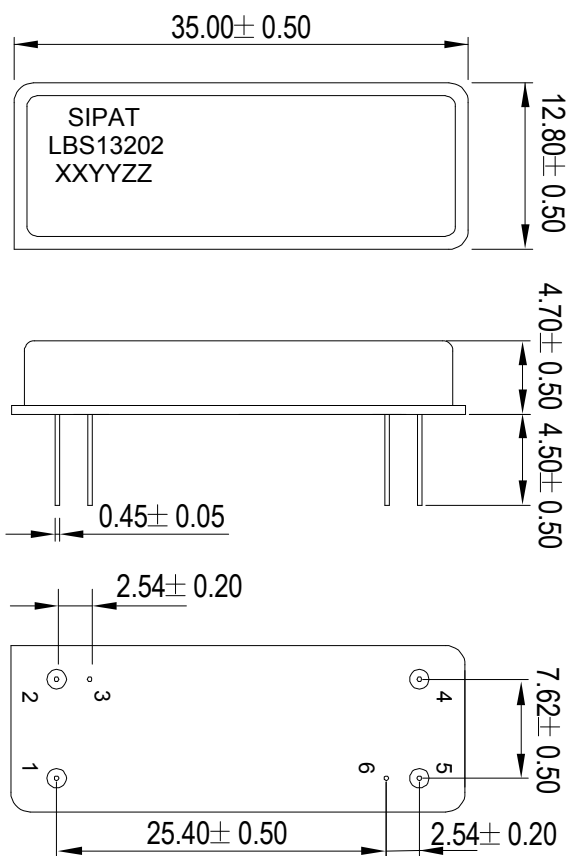

Pad Configuration:

Input 1
Output 5
Ground 2,3,4,6

Marking Configuration:

- 1) SIPAT: Manufacturer Name
- 2) LBS13202: Part Number
- 3) XXYY: Date(Year/month)
- 4) ZZ: Identified Code

Package: DIP3512

Unit: mm



SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number

LBS13202

Rev. Date

2013-09-03

Ver.

1.0

Page 2/3



Typical Performance

