

MDCFM-40U



40V-160VDC Input, Compact EMC Filter Module

Key Features:

- 40 to 110 VDC Input
- Compact 1" x 2" Case
- Meets EN 50155
- Reverse Polarity Protection
- 1.2 MHour MTBF
- -40°C to +85°C Operation
- 98% Efficiency
- Chassis Mount Option
- DIN Rail Mount Option
- Low Cost



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range, See Note 1		40		160	VDC
No Load Current, See Note 2	MDCFM-40U-10, MDCFM-40U-30			1.0	mA
	MDCFM-40U-50			3.0	

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Efficiency	MDCFM-40U-10		95		%
	MDCFM-40U-30, MDCFM-40U-50		98		
Max Output Voltage			165		VDC
Max Output Power	MDCFM-40U-10			10	W
	MDCFM-40U-30			30	
	MDCFM-40U-50			50	

EMI Characteristics (See Note 4)

Parameter	Standard	Level
Radiated Emissions	EN 55022	Class B (150 kHz - 30 MHz)
Conducted Emissions	EN 55022	Class B (30 MHz - 1 GHz)
ESD	EN 61000-4-2	Criteria B; Air ±8 kV, Contact ±6 kV
RS	EN 61000-4-3	Criteria A; 10V/m
EFT	EN 61000-4-4	Criteria B; ±4 kV (5 kHz - 100 kHz)
Surge	EN 61000-4-5	Criteria B; ±2 kV (1.2 μS/50 μS 2Ω) Criteria B; ±4 kV (1.2 μS/50 μS 12Ω)
CS	EN 61000-4-6	Criteria B; 10 Vrms
Vibration	EN 61373	Sinusoidal 5~150 Hz; 7.5 mm Amplitude; 10g Acceleration

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+85	°C
Storage Temperature Range		-55		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%

Physical

Case Size	Module	See Mechanical Drawing (Page 2)
	Chassis (A2) Mount	See Mechanical Drawing (Page 2)
	DIN (A4) Mount	See Mechanical Drawing (Page 2)
Case Material	Non-Conductive Black Plastic (UL94-V0)	
Weight	Module	1.77 Oz (50g)
	Chassis (A2) Mount	2.48 Oz (70g)
	DIN (A4) Mount	3.19 Oz (90g)

MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com




www.micropowerdirect.com

Model Number	Input Voltage Range (VDC)		Withstand Voltage (VAC)	Max. Output Power (W)	Efficiency (%)
	Nominal	Range			
MDCFM-40U-10	110	40 - 160	500	10	95%
MDCFM-40U-30	110	40 - 160	500	30	98%
MDCFM-40U-50	110	40 - 160	1,500	50	98%

Notes:

1. The Max input voltage level of the DC/DC converter must be less than the maximum specified input of the **MDCFM-40U**.
2. The maximum power of the DC/DC converter must be less than the maximum output power of the **MDCFM-40**.
3. The -Vout pin should not be connected to the "ground" input.

Typical Connection

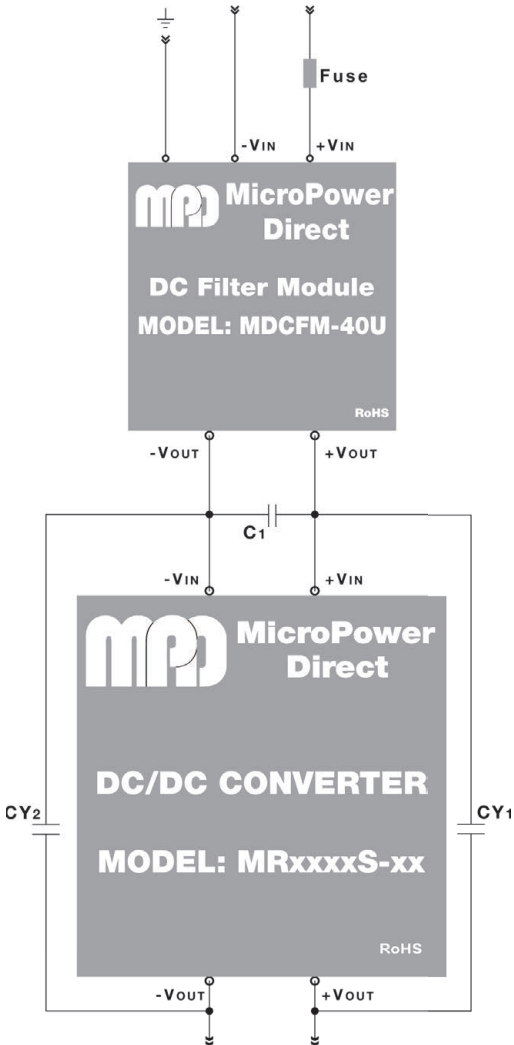


The diagram at right shows a typical connection for a **MDCFM-40U** series filter module. Praying at right i The external capacitors shown in the typical connection diagram below are required to meet specified operation. Recommended component values are given in the table below.


Component	Value
C ₁	400 μ F/200V
CY ₁ , CY ₂	1nF/2 kV

The "GND" input should not be connected to the -VIN pin or the -Vout pin of the filter. Also, the Y capacitors should be connected as shown, not from the filter module input to the DC/DC module output.


Efficiency vs Input Voltage (Full Load)

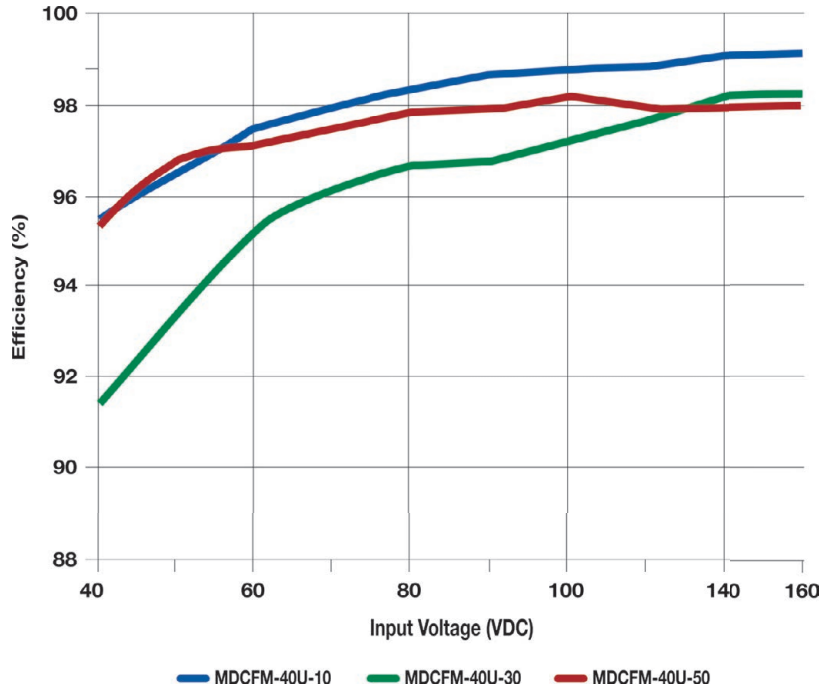

Efficiency vs Output Power (VIN= 110 VDC)

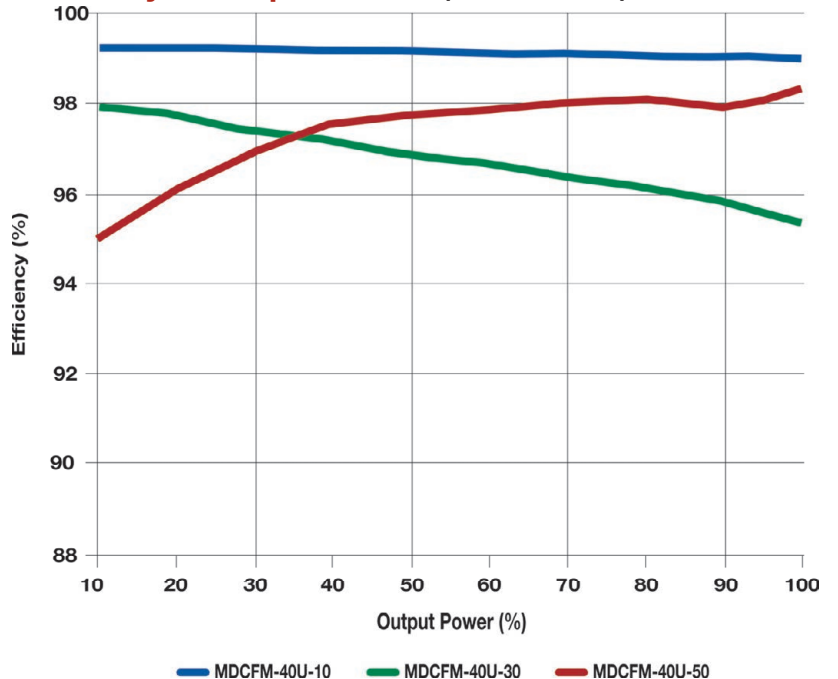


Mechanical Dimensions, MDCFM-40U-10

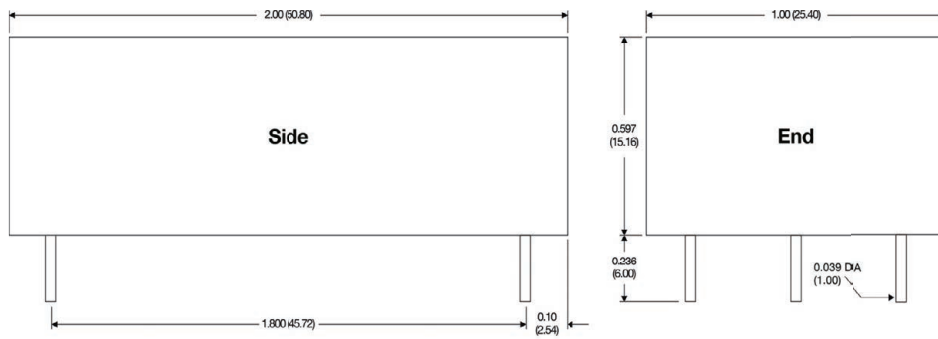


Pin Connections

Pin	Function
1	GND
2	-VIN
3	+VIN
4	+VOUT
5	-VOUT

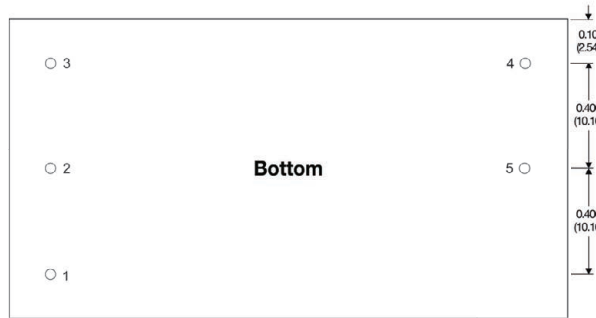

Mechanical Dimensions: With Chassis Mount Option (A2)

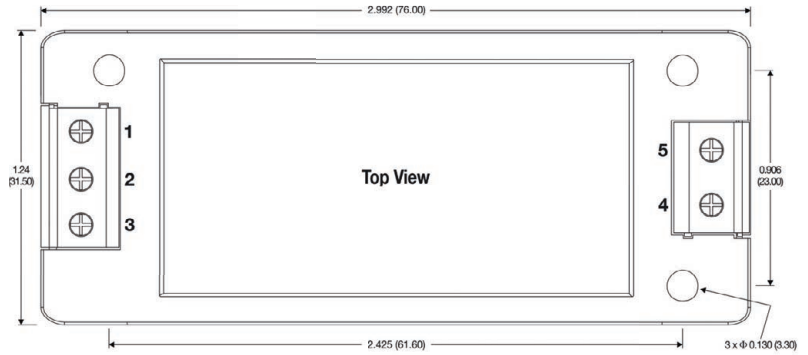

The **MDCFM-40U-10** is available mounted on an adapter plate for mounting to a chassis or on a DIN rail. Mechanical dimensions for these adapters is shown at right. The photo below shows a product mounted on a similar adapter. Please contact the factory for more information.

For the chassis mount option, add suffix "A2" to the model number (i.e. **MDCFM-40U-10-A2**)

For the DIN rail mount option, add suffix "A4" to the model number (i.e. **MDCFM-40U-10-A4**)


Pin Connections

Pin	Function
1	GND
2	-VIN
3	+VIN
4	+VOUT
5	-VOUT

Connection is the same for A2 & A4




Mechanical Dimensions: With DIN Rail Option (A4)

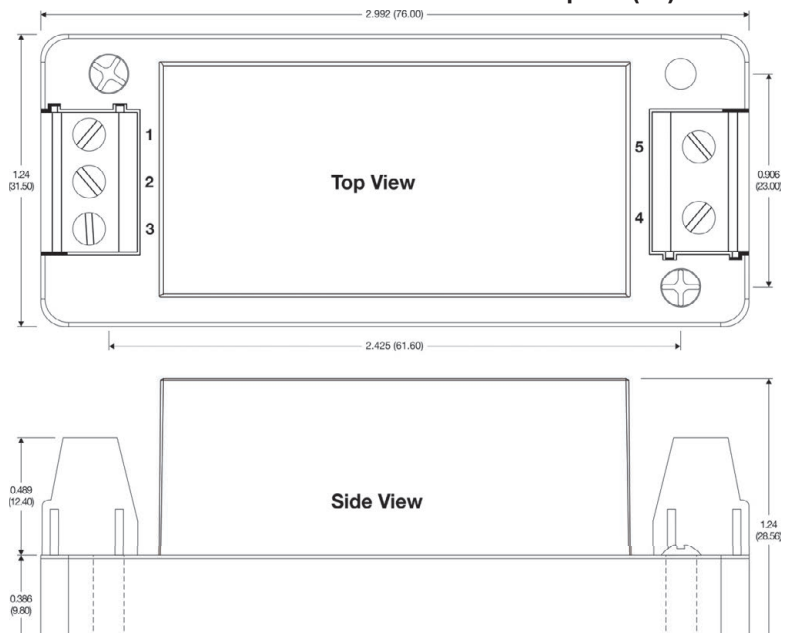


Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)
- Wire range for A2 & A4 connection is 24 - 12 AWG


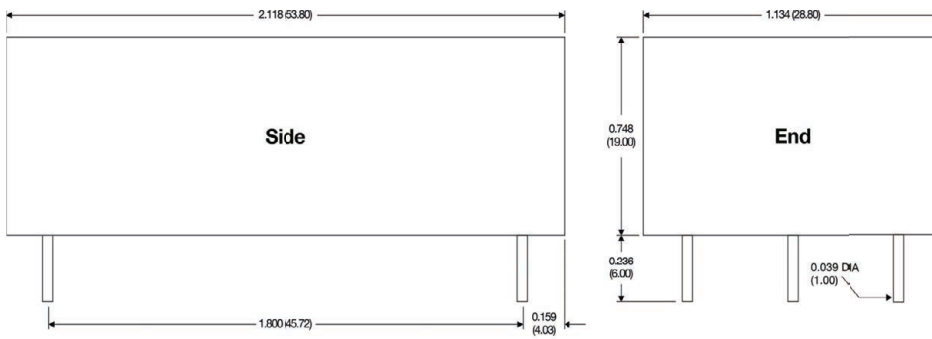


Pin Connections

Pin	Function
1	GND
2	-VIN
3	+VIN
4	+VOUT
5	-VOUT

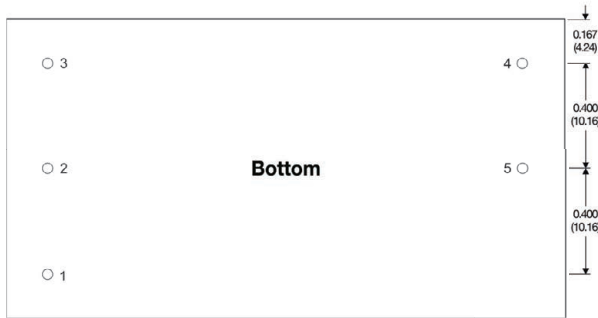

Mechanical Dimensions: With Chassis Mount Option (A2)

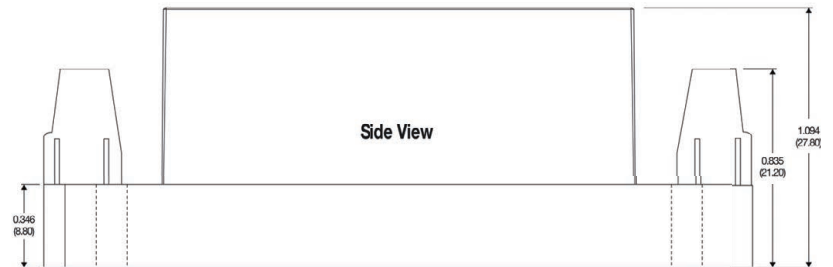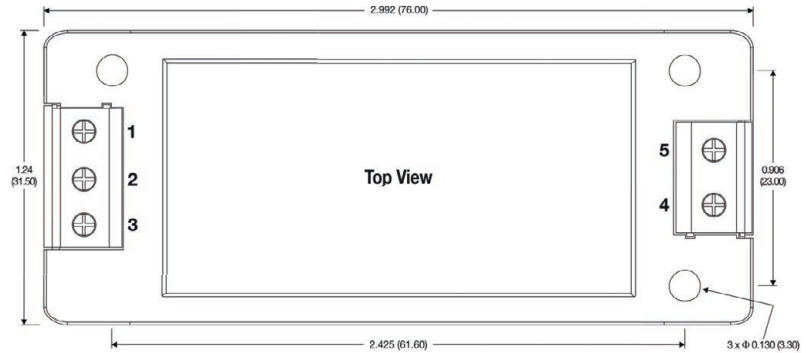

The **MDCFM-40U-30/50** are available mounted on an adapter plate for mounting to a chassis or on a DIN rail. Mechanical dimensions for these adapters are shown at right. The photo below shows a product mounted on a similar adapter. Please contact the factory for more information.

For the chassis mount option, add suffix "A2" to the model number (i.e. **MDCFM-40U-30-A2**)



For the DIN rail mount option, add suffix "A4" to the model number (i.e. **MDCFM-40U-50-A4**)

Pin Connections

Pin	Function
1	GND
2	-VIN
3	+VIN
4	+VOUT
5	-VOUT

Connection is the same for A2 & A4

Mechanical Dimensions: With DIN Rail Option (A4)

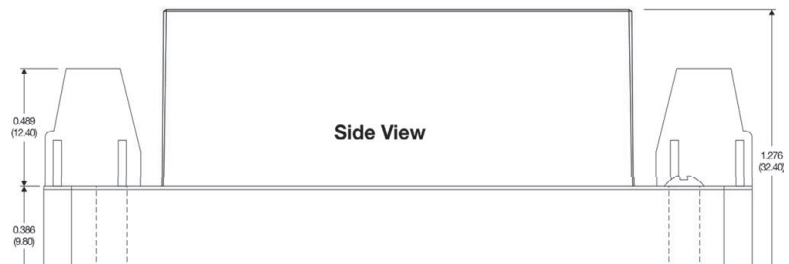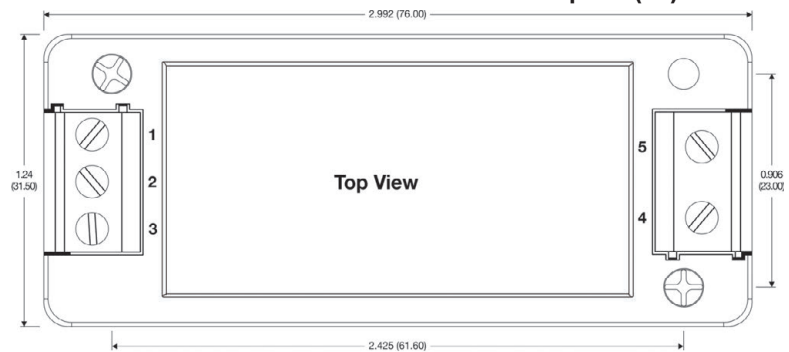

Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.02 (±0.50)
- Wire range for A2 & A4 connection is 24 - 12 AWG



MicroPower Direct
We Power Your Success - For Less!