

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-	10869	RELEASED	11/29/10	

APPROVED: _____

DATE: _____ TITLE: _____

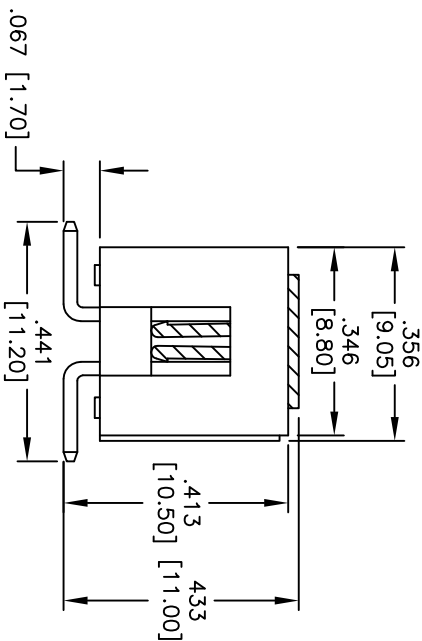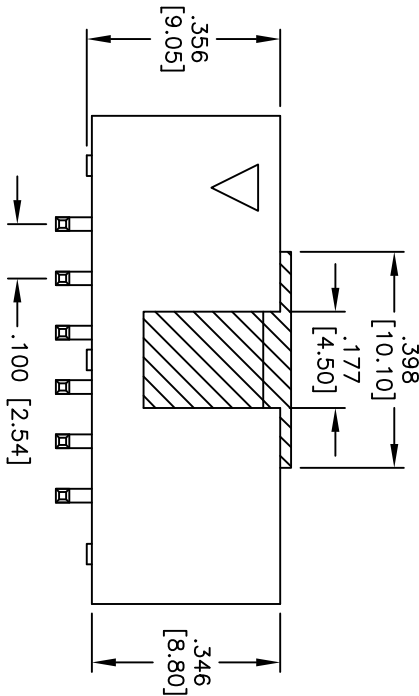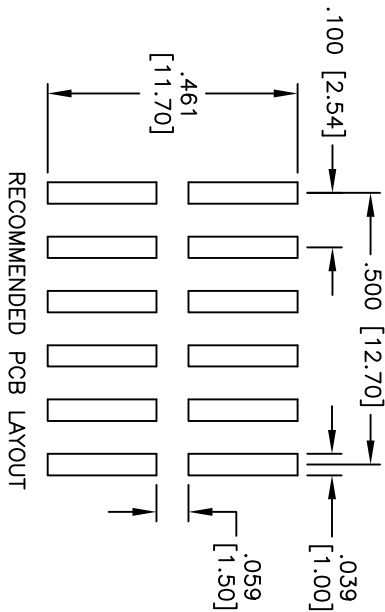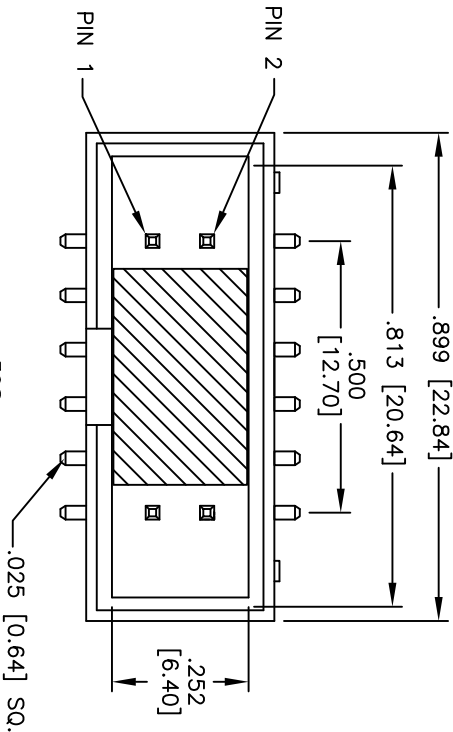

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.

Electrical:

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp: 260°C for 5 seconds



PACKAGED ON TAPE & REEL

ADAM TECH

909 Railway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

BOX HEADER, VERTICAL, SMT TYPE

SEL GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED				TITLE			
.X INCHES	± .10 HOLD	Ø.X HOLD	± .10 HOLD	PART NO.			
.XX INCHES	± .020 HOLD	Ø.XX HOLD	± .015 HOLD	BHR-12-VSGA-SMT-PP-TR-11.18			
.XXX INCHES	± .015 HOLD	Ø.XXX HOLD	± .010 HOLD	REV.			
APPROVALS				SCALE: NTS			
DRAWN				SHEET 1 OF 1			
CHECKED							
APPROVED							